


Ardizzone

HOME & DECOR
by LOONARI



LOONARI

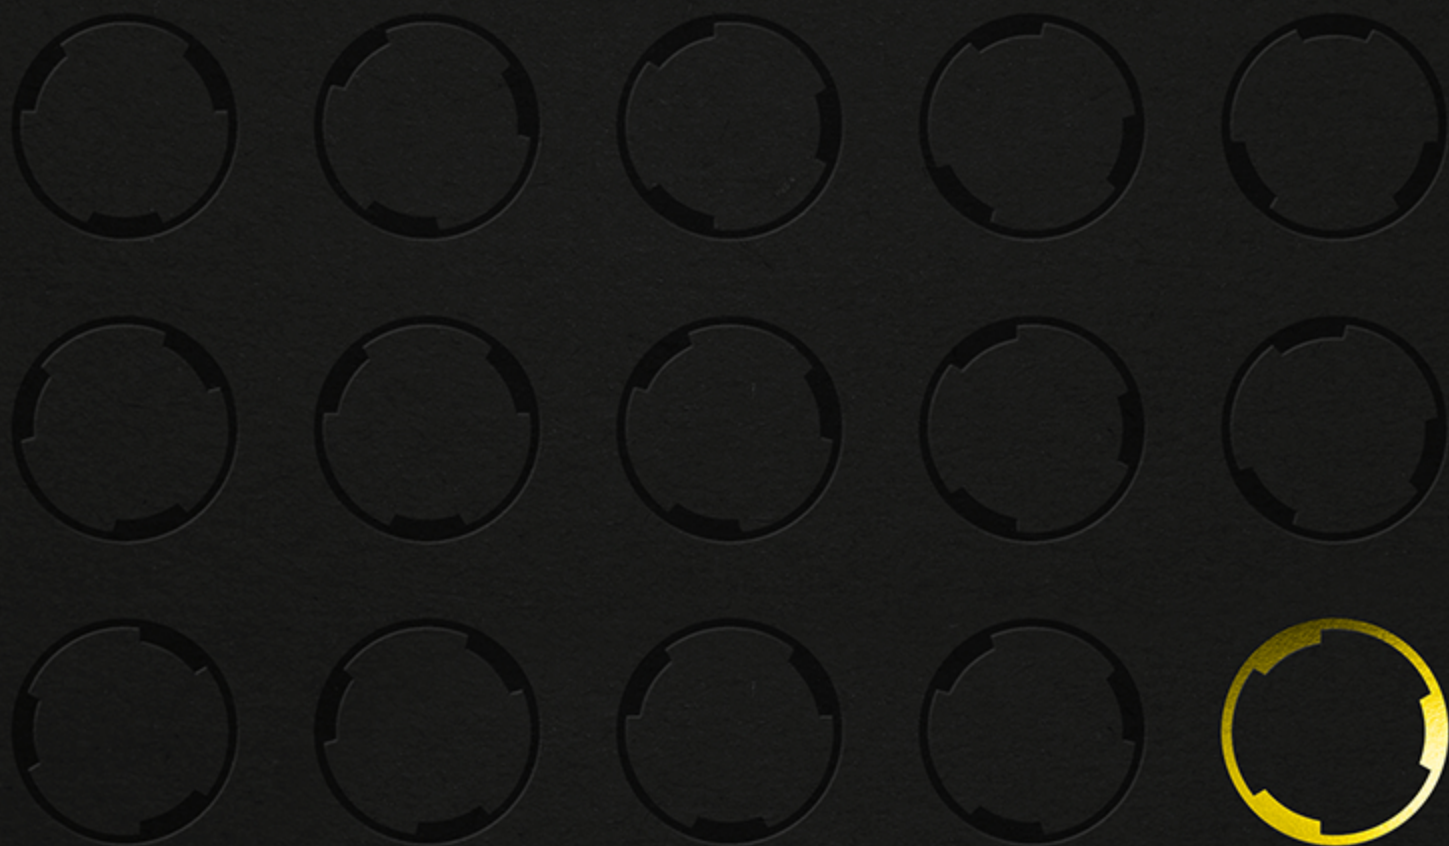

ARDIZONE



← JOIN US ON INSTAGRAM

Catalog current status: **October, 2024**

All measurements and technical data given in the catalogue are informational only. Due to the production process actual parameters of the products may slightly differ from information provided in the catalogue.

The most up-to-date data and actual technical information can be found on product cards, manuals or our website: **loonari.eu**

LOONARI sp. z o.o. reserves the right to amend presented materials and technical parameters without prior notice.

LOONARI sp. z o.o. is not liable for any printing mistake. All images in the catalogue are protected with authors' rights. Products and colours presented in the pictures are illustrative and may visually differ from actual products.

LOONARI mark has been registered at the EUIPO.

GET IN CONTACT

We're more than just a lamp provider – we're your partner in creating the perfect lighting. Starting with lighting design and continuing through the selection of the right products and control system, we will support you throughout the system set up and commissioning process.

If needed, you can count on our post-warranty service too. Tell us about your project: **hello@loonari.eu**

DISTRIBUTION




LOONARI sp. z o.o.
Podmiejska 7
Piekary Śląskie
PL41940, Poland
+48 539 982 819

CONTENTS PAGE

ARDIZONE

ARDIZONE system	6
LUGO AZ	16
S40 AZ	18
S60 AZ	20
S75 AZ	22
T40 AZ	24
T60 AZ	26
Single base	28
Double base	30
Triple base	33
Quadruple base	34

ARDIZONE SYSTEM

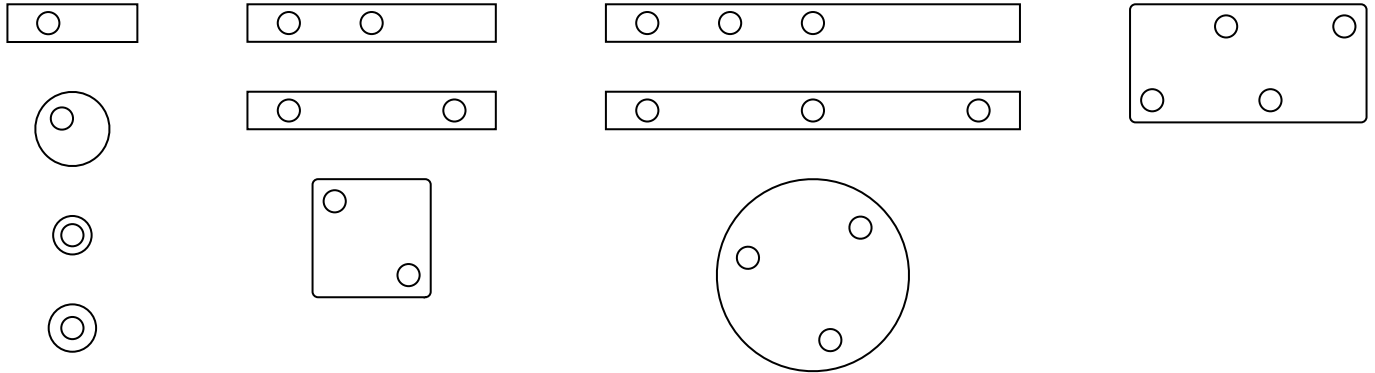



11 models of mounting bases

5 bases with dimming functionality

2 available colours ○ ●

4 module lengths

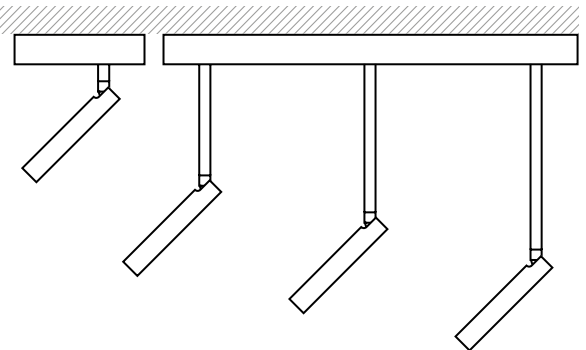

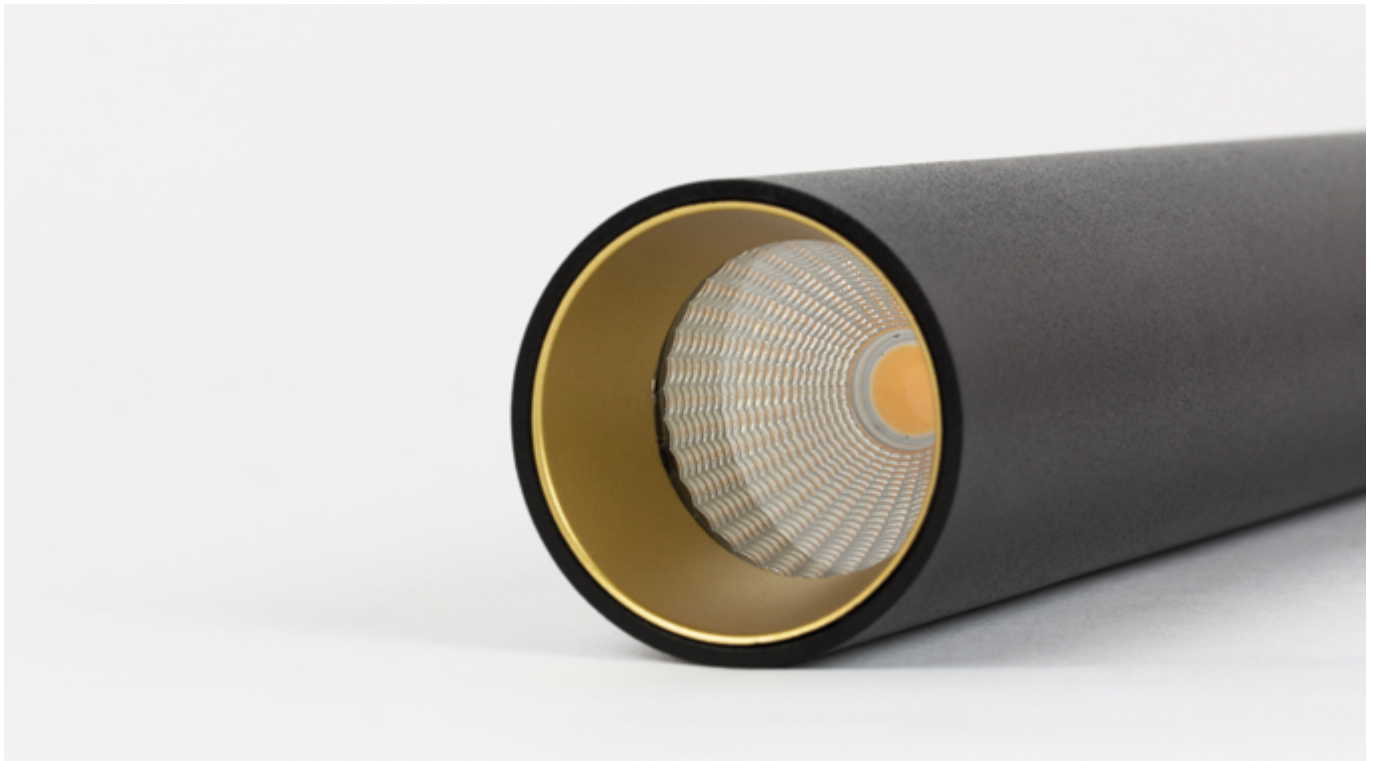


8 light fixtures

2 colour temperatures

2 available colours ○ ●

3 colours of decorative rings ○ ● ●


3 exchangeable reflectors

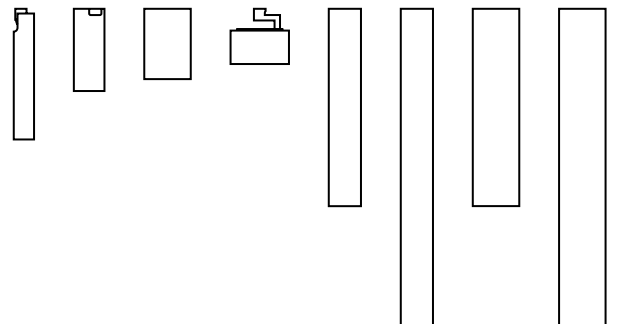







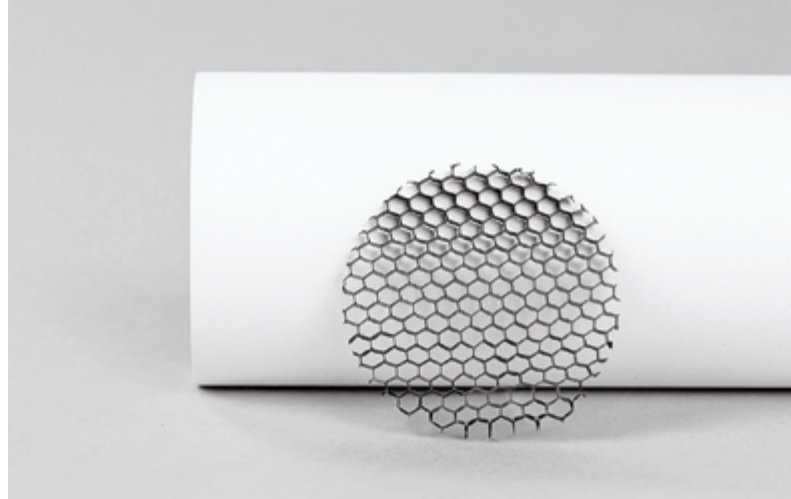









LUGO AZ

S / M / L / XL

LOONARI | 16


ARDIZONE LUGO AZ



 Lifetime 30 000 h	 Beam angle 24°	 CRI 90	 Voltage 220-240V	 Protection class IP20
---	--	--	---	---

Wattage

Colour temperature	7 W	7 W
Luminous flux	3000 K	4000 K
Dimming functionality	675 lm	675 lm
Mounting method	none / optional	none / optional
Second circuit	in dedicated base	in dedicated base
Colour	☐ ☒	☒

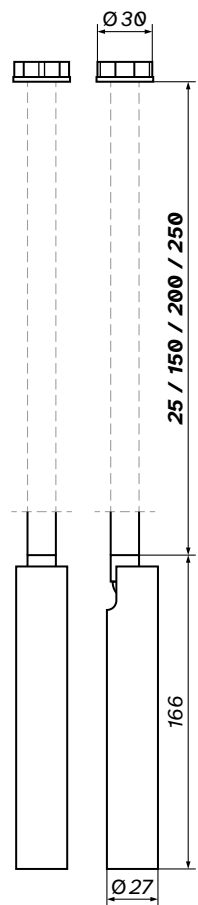

1:4

product code

S	3000 K	○	899694	●	899700
	4000 K	●	899717		
M	3000 K	○	899724	●	899731
	4000 K	●	899748		
L	3000 K	○	899755	●	899762
	4000 K	●	899779		
XL	3000 K	○	899786	●	899793
	4000 K	●	899809		

S40 AZ

LOONARI | 18

ARDIZONE S40 AZ



Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories (honeycomb lens / linear lens / softening lens)

 Lifetime
30 000 h

 Beam angle
23° / 34° / **50°**

 CRI
90

 Voltage
220-240V

 Protection class
IP20

Wattage

Colour temperature 9,2 W


Luminous flux 3000 K / 4000 K

Dimming functionality 739 lm

Mounting method none / optional

Second circuit in dedicated base

Colour ☐ ☒

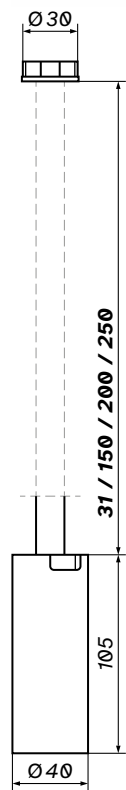

1:4



product code

3000 K	○	50°	454135	34°	454135-896464	23°	454135-896457
	●	50°	454142	34°	454142-896464	23°	454142-896457
4000 K	○	50°	458638	34°	458638-896464	23°	458638-896457
	●	50°	458645	34°	458645-896464	23°	458645-896457

S60 AZ

LOONARI | 20
ARDIZONE S60 AZ



Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories (honeycomb lens / linear lens / softening lens)

 Lifetime 30 000 h	 Beam angle 15° / 35° / 46°	 CRI 90	 Voltage 220-240V	 Protection class IP20
---	--	--	---	---

Wattage

Colour temperature 9,2 W


Luminous flux 3000 K

Dimming functionality 739 lm

Mounting method none / optional

Second circuit in dedicated base

Colour ☐ ☒

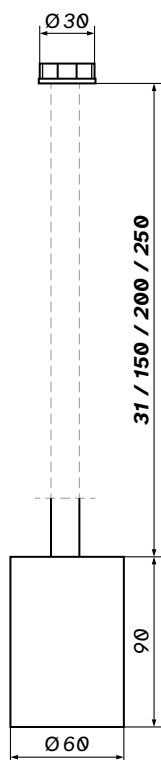

1:4

product code

○	46°	454166	35°	454166-897331	15°	454166-897324
●	46°	454173	35°	454173-897331	15°	454173-897324

S75 AZ

LOONARI | 22
ARDIZONE S75 AZ



Combine with:

Decorative ring ☐ ☒

Optical accessories (honeycomb lens / linear lens / softening lens)

 Lifetime
30 000 h

 Beam angle
23° / 34° / **50°**

 CRI
90

 Voltage
220-240V

 Protection class
IP20

Wattage

Colour temperature 9,2 W


Luminous flux 3000 K / 4000 K

Dimming functionality 739 lm

Mounting method none / optional

Second circuit in dedicated base

Colour ☐ ☒

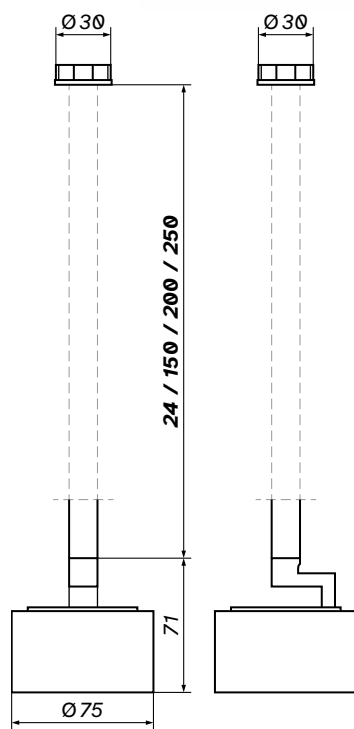

1:4

product code

3000 K	○	50°	454197	34°	454197-896464	23°	454197-896457
	●	50°	454203	34°	454203-896464	23°	454203-896457
4000 K	○	50°	459291	34°	459291-896464	23°	459291-896457
	●	50°	459284	34°	459284-896464	23°	459284-896457

T40 AZ

S / L

LOONARI | 24
ARDIZONE T40 AZ



Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories (honeycomb lens / linear lens / softening lens)

 Lifetime 30 000 h	 Beam angle 23° / 34° / 50°	 CRI 90	 Voltage 220-240V	 Protection class IP20
---	--	--	---	---

Wattage

Colour temperature 9,2 W


Luminous flux 3000 K

Dimming functionality 739 lm

Mounting method none / optional

Second circuit in dedicated base

Colour ☐ ☒

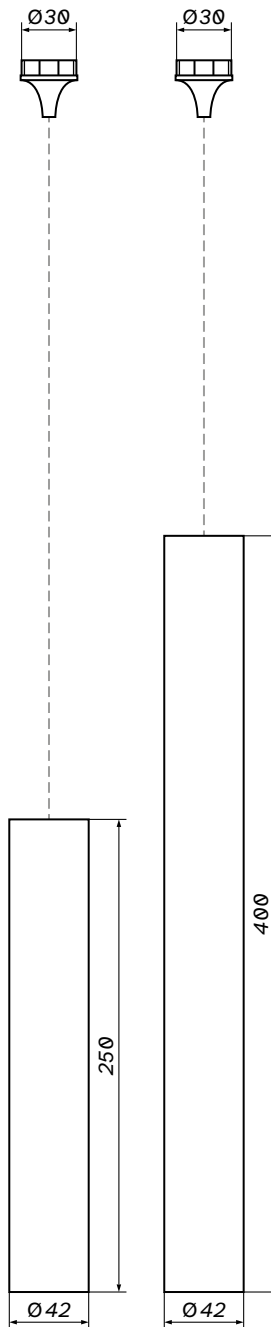

product code

S	○	50°	454234	34°	454234-896464	23°	454234-896457
	●	50°	454241	34°	454241-896464	23°	454241-896457
L	○	50°	454258	34°	454258-896464	23°	454258-896457
	●	50°	454265	34°	454265-896464	23°	454265-896457

1:4

T60 AZ

S / L

LOONARI | 26
ARDIZONE T60 AZ



Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories (honeycomb lens / linear lens / softening lens)

 Lifetime 30 000 h	 Beam angle 15° / 35° / 46°	 CRI 90	 Voltage 220-240V	 Protection class IP20
---	--	--	---	---

Wattage

Colour temperature 9,2 W


Luminous flux 3000 K

Dimming functionality 739 lm

Mounting method none / optional

Second circuit in dedicated base

Colour ☐ ☒

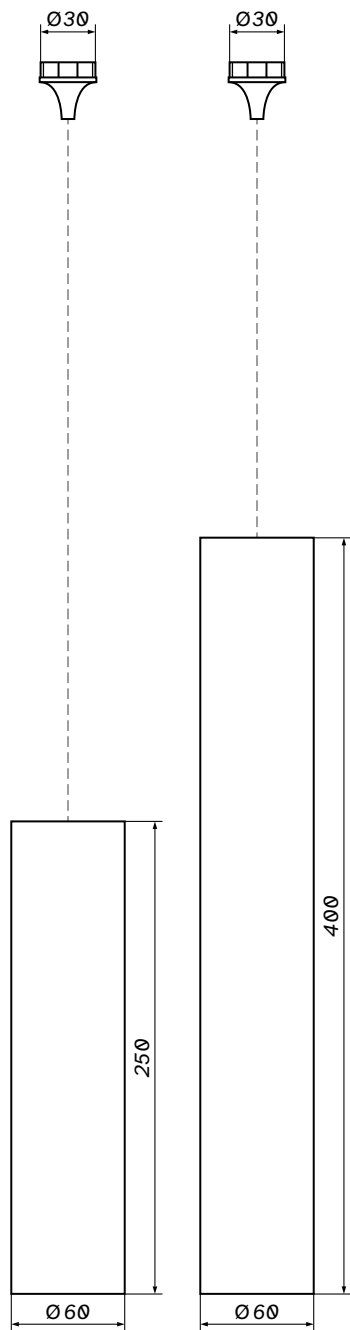



product code

S	○	46°	454272	35°	454272-897331	15°	454272-897324
	●	46°	454289	35°	454289-897331	15°	454289-897324
L	○	46°	454296	35°	454296-897331	15°	454296-897324
	●	46°	454302	35°	454302-897331	15°	454302-897324

1:4

SINGLE BASE

SINGLE BASE RO1T1





1:4

Dimming functionality none
Mounting method surface mounted
Switch-key none
Colour ☐ ☒

product code
☐ 454319 ☒ 454326

SINGLE BASE RO1T2




1:4

Dimming functionality none
Mounting method surface mounted
Switch-key none
Colour ☐ ☒

product code
☐ 454333 ☒ 454340

SINGLE BASE RO1T3

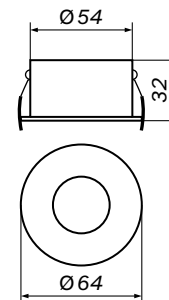


1:4

Dimming functionality	none
Mounting method	recessed
Mounting hole	Ø 57 mm
Minimum depth	42 mm
Switch-key	none
Colour	☐ ☒

product code

☐ 459383 ☒ 459390

SINGLE BASE LI1

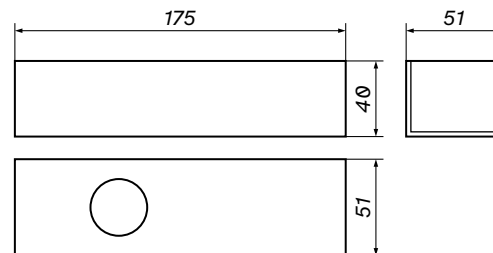

1:4

Dimming functionality	none
Mounting method	surface mounted
Switch-key	none / button
Colour	☐ ☒


product code

none ☐ 454357 ☒ 454364
button ☐ 455125 ☒ 455132

DOUBLE BASE

LOONARI | 30
ARDIZONE DOUBLE BASE LI2 / SQ2

DOUBLE BASE LI2

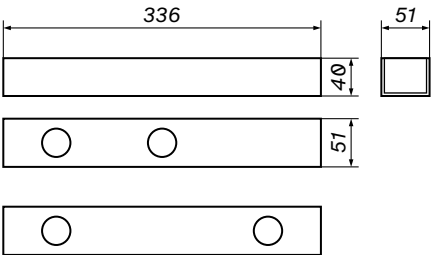


1:8

Dimming functionality none
Mounting method surface mounted
Switch-key none
Colour ☐ ☒

product code

LI2T1	☐	454371	☒	454388
LI2T2	☐	454395	☒	454401

DOUBLE BASE SQ2

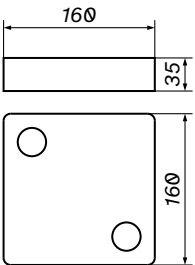


1:8

Dimming functionality none
Mounting method surface mounted
Switch-key none / button
Colour ☐ ☒

product code


none	☐	454418	☒	454425
button	☐	455163	☒	455170



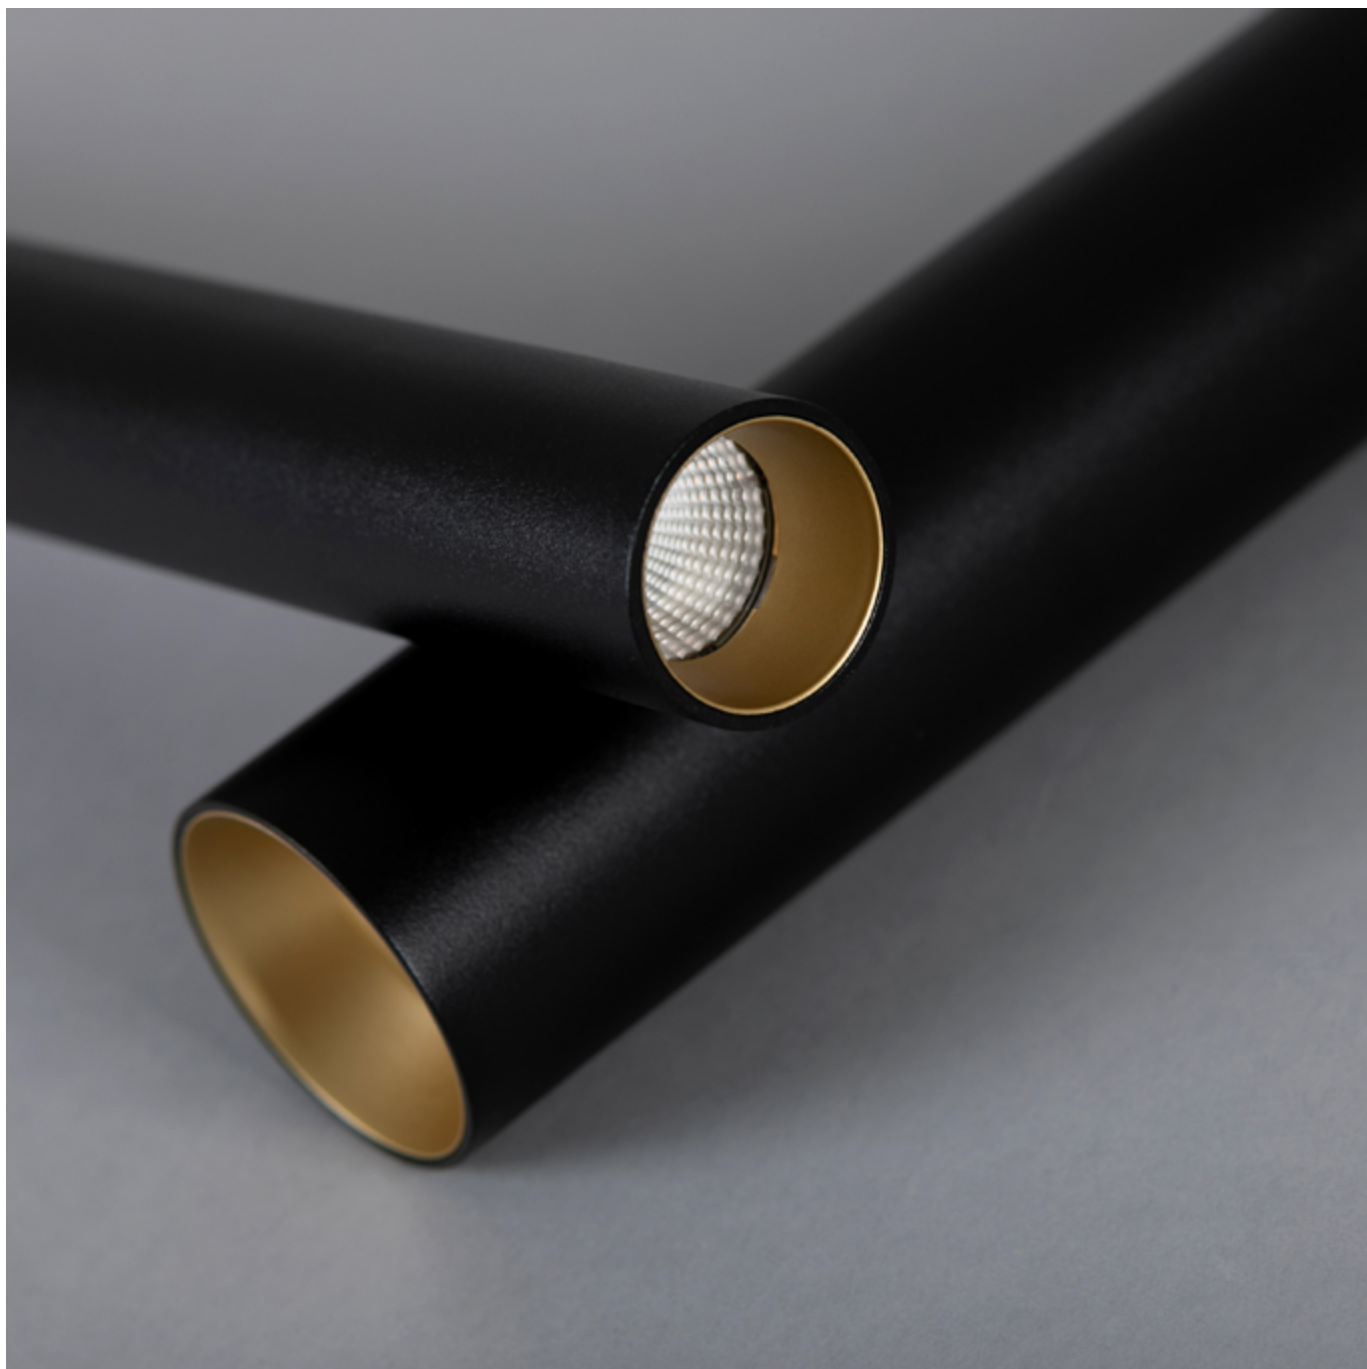

TRIPLE BASE

TRIPLE BASE RO3

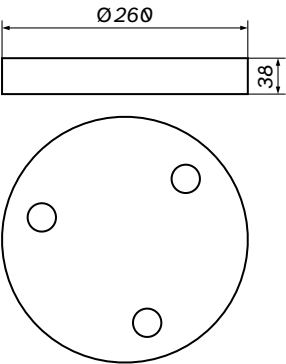


1:8

Dimming functionality	none / PC
Mounting method	surface mounted
Switch-key	none
Colour	☐ ☒

product code					
none	☐	454432	☒	454449	
PC	☐	454456	☒	454463	

TRIPLE BASE LI3

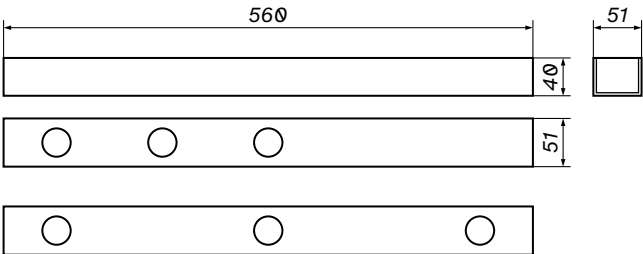


1:8

Dimming functionality	none / PC
Mounting method	surface mounted
Switch-key	none
Colour	☐ ☒

product code					
LI3T1	none	☐	454470	☒	454487
	PC	☐	454494	☒	454500
LI3T2	none	☐	454517	☒	454524
	PC	☐	454531	☒	454548

QUADRUPLE BASE

QUADRUPLE BASE SQ4



1:8

Dimming functionality	none / PC
Mounting method	surface mounted
Switch-key	none
Colour	☐ ☒

product code					
none	☐	454555	☒	454562	
PC	☐	454579	☒	454586	



