


Ceiling Lights

HOME & DECOR
by LOONARI



Ceiling Lights

HOME & DECOR
by LOONARI



LOONARI



CEILING LIGHTS



← JOIN US ON INSTAGRAM

Catalog current status: **Sierpień, 2025**

All measurements and technical data given in the catalogue are informational only. Due to the production process actual parameters of the products may slightly differ from information provided in the catalogue.

The most up-to-date data and actual technical information can be found on product cards, manuals or our website: **loonari.eu**

LOONARI sp. z o.o. reserves the right to amend presented materials and technical parameters without prior notice.

LOONARI sp. z o.o. is not liable for any printing mistake. All images in the catalogue are protected with authors' rights. Products and colours presented in the pictures are illustrative and may visually differ from actual products.

LOONARI mark has been registered at the EUIPO.

GET IN CONTACT

We're more than just a lamp provider – we're your partner in creating the perfect lighting. Starting with lighting design and continuing through the selection of the right products and control system, we will support you throughout the system set up and commissioning process.

If needed, you can count on our post-warranty service too. Tell us about your project: **hello@loonari.eu**

DISTRIBUTION



LOONARI sp. z o.o.
Podmiejska 7
Piekary Śląskie
PL41940, Poland
+48 539 982 819

CONTENTS PAGE

CEILING LIGHTS

Eibar	18
Milo	20
Naro	22
Soria RO	24
Soria SQ	28
Viana RO	32
Viana SQ	36


















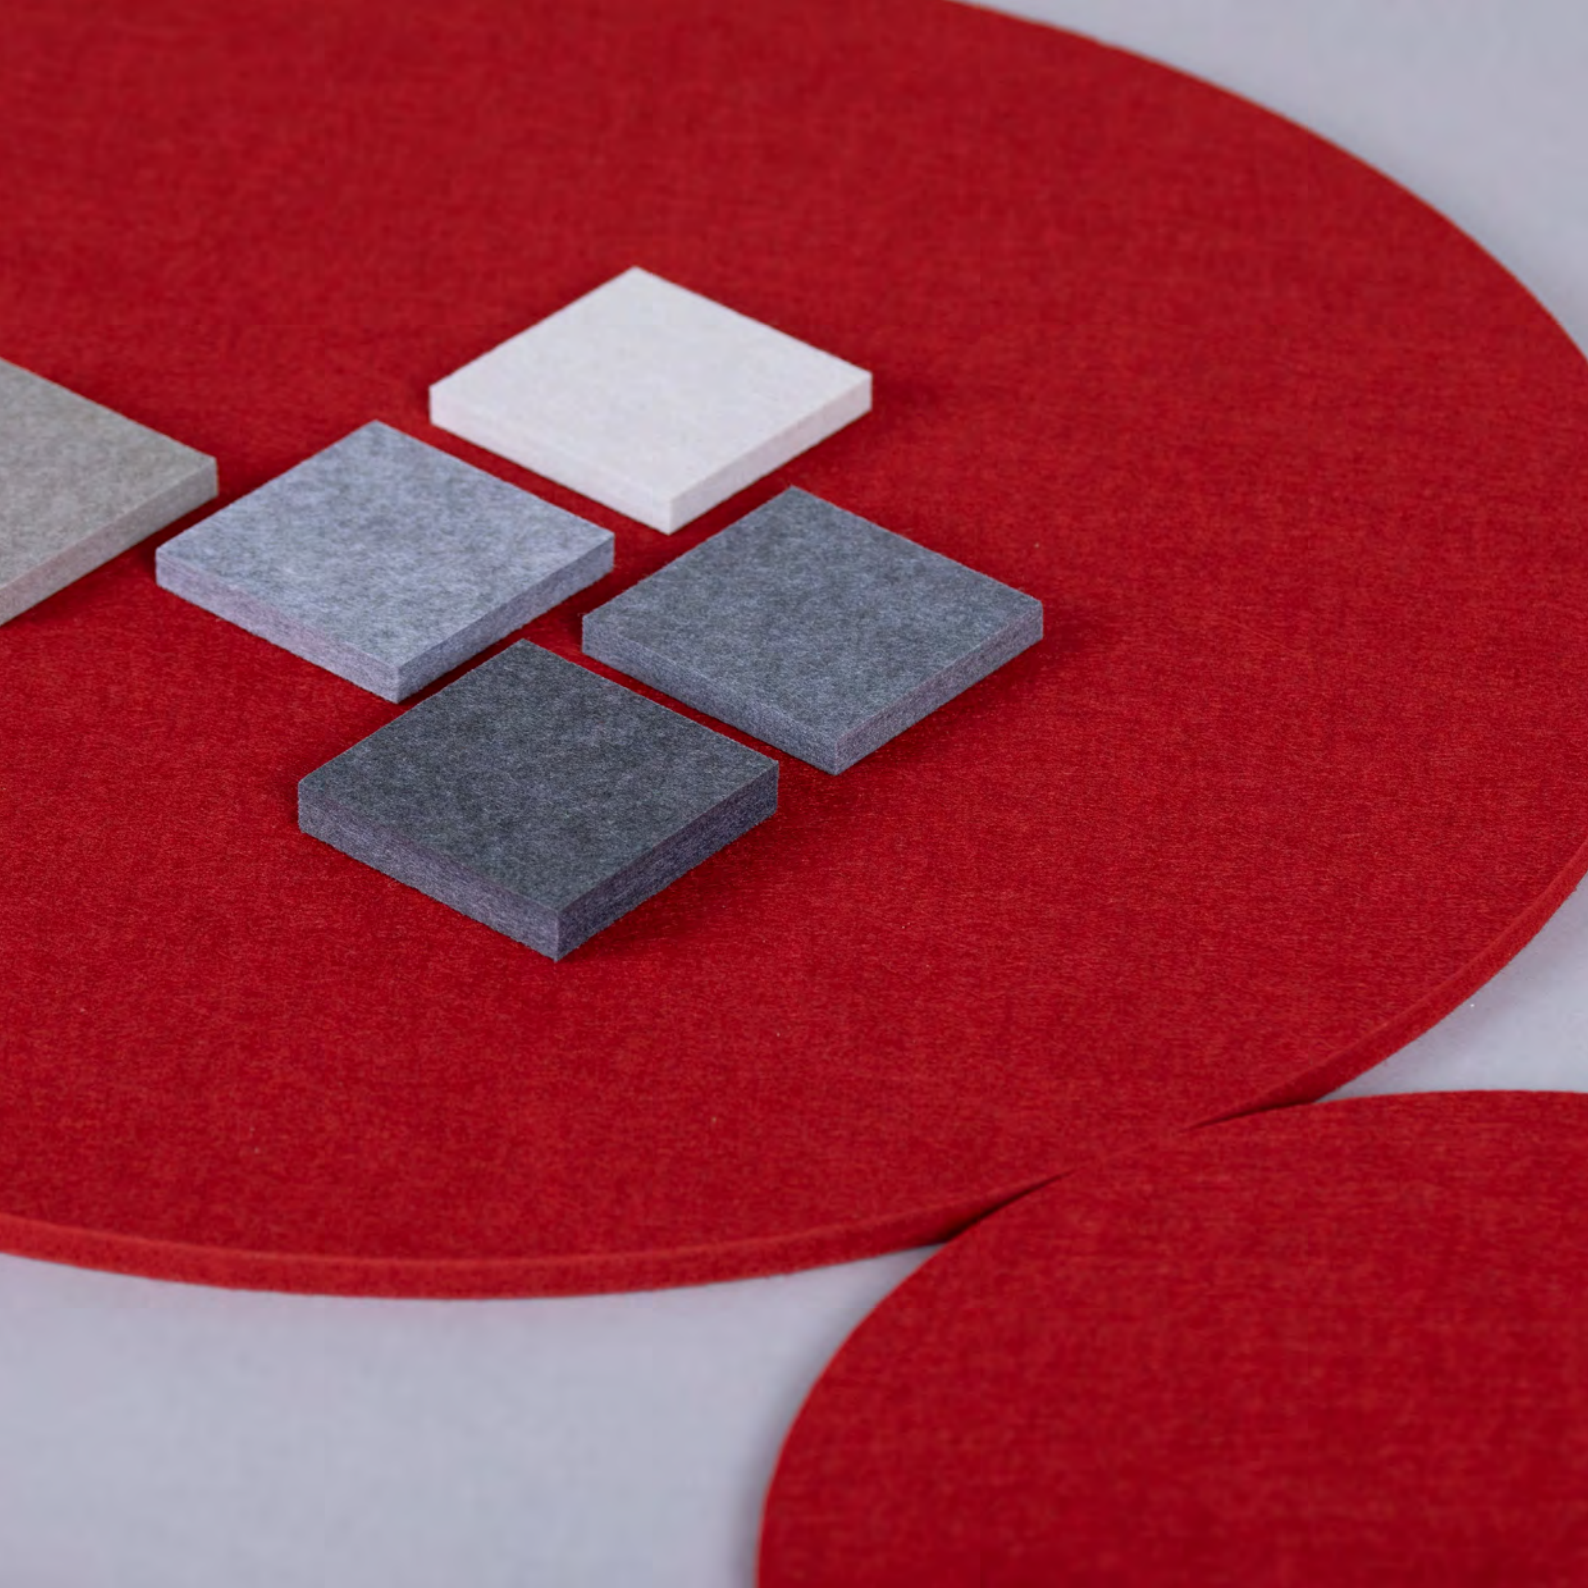







STRZELECKA
GABINETY LEKARSKIE






Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

Lifetime **30 000 h** Beam angle **90°** CRI **80** Voltage **220-240 V** Protection class **IP20**

	S	M	L
Wattage	30 W	40 W	50 W
Colour temperature	3000-6000 K	3000-6000 K	3000-6000 K
Luminous flux	3000 lm	4000 lm	5000 lm
Dimming functionality	none	none	none
Mounting method	surface mounted	surface mounted	surface mounted
Colour	☐ ☒	☐ ☒	☐ ☒



1:10

product code

S	3000 K	○	891759	●	891766
----------	--------	---	--------	---	--------

M	3000 K	○	891773	●	891780
----------	--------	---	--------	---	--------

L	3000 K	○	891797	●	891803
----------	--------	---	--------	---	--------

MILO


M / L / XL

LOONARI | 20
ceiling lights – MILO



 Lifetime 30 000 h	 Beam angle 90°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

	M	L	XL
Wattage	30 W	40 W	60 W
Colour temperature	3000 lm	4000 lm	6000 lm
Luminous flux	3000 K / 4000 K	3000 K / 4000 K	3000 K / 4000 K
Dimming functionality	none	none	none
Mounting method	pendant	pendant	pendant
Colour	●	●	●

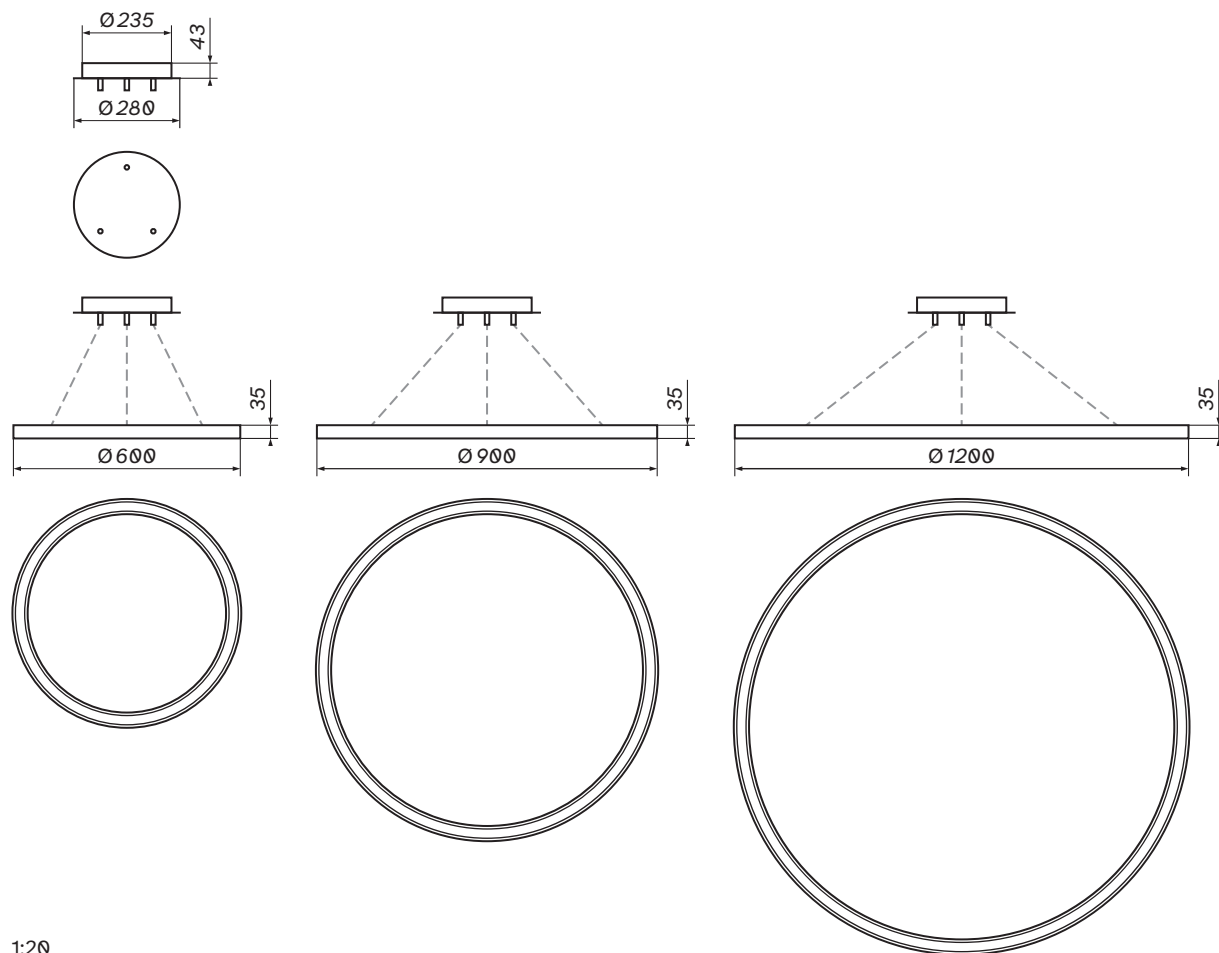

1:20

product code

M	3000 K	○	701645	●	701669
	4000 K	○	701652	●	701676
L	3000 K	○	701683	●	701706
	4000 K	○	701690	●	701713
XL	3000 K	○	701720	●	701744
	4000 K	○	701737	●	701751

NARO

LOONARI | 22
ceiling lights – NARO







 Lifetime **30 000 h**  Beam angle **90°**  CRI **90**  Voltage **220-240 V**  Protection class **IP20**

Wattage **50 W**
Colour temperature **3000 K / 4000 K**
Luminous flux **5000 lm**
Dimming functionality **none**
Mounting method **pendant**
Colour ☐ ☒

M

product code

3000 K	☐	701768	☒	701782
4000 K	☐	701775	☒	701799

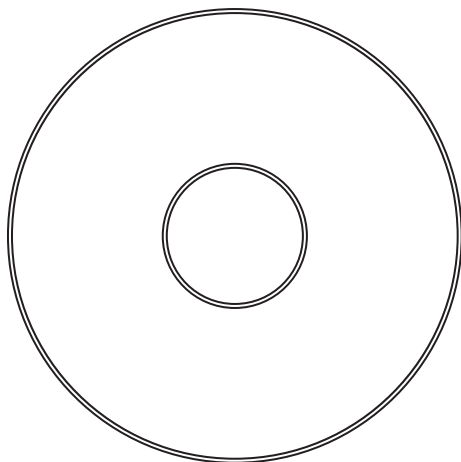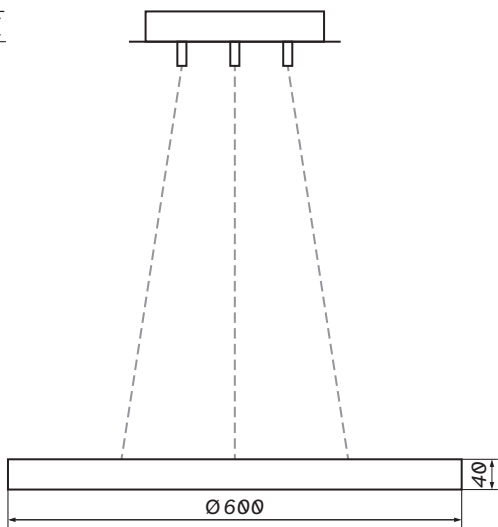

SORIA RO

LOONARI | 24
ceiling lights – SORIA RO

XS / S / M



Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

Lifetime
30 000 h


Beam angle
90°

CRI
90

Voltage
220-240 V

Protection class
IP20

	XS	S	M
Wattage	25 W	40 W	60 W
Colour temperature	2500 lm	4000 lm	6000 lm
Luminous flux	3000 K / 4000 K	3000 K / 4000 K	3000 K / 4000 K
Dimming functionality	none	none	none
Mounting method	surface mounted	surface mounted	surface mounted
Colour	☐ ☒	☐ ☒	☐ ☒

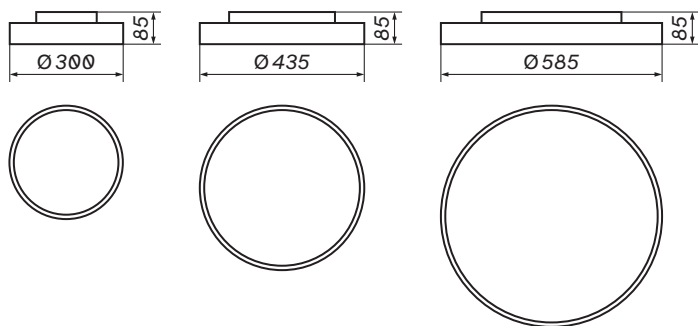

1:20

product code

XS	3000 K	○	890493	●	890479
	4000 K	○	894552	●	890486
S	3000 K	○	890523	●	890509
	4000 K	○	894569	●	890516
M	3000 K	○	890554	●	890530
	4000 K	○	701805	●	890547

SORIA RO

LOONARI | 26
ceiling lights – SORIA RO





L / XL



Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

 Lifetime	 Beam angle		 CRI	 Voltage	 Protection class
30 000 h	90°		90	220-240 V	IP20
	L	L	XL	XL	
Wattage	90 W	90 W	120 W	120 W	
Colour temperature	9000 lm	9000 lm	12000 lm	12000 lm	
Luminous flux	3000 K	3000 K / 4000 K	3000 K	3000 K / 4000 K	
Dimming functionality	none	none	none	none	
Mounting method	surface mounted	surface mounted	surface mounted	surface mounted	
Colour	☐	☒	☐	☒	

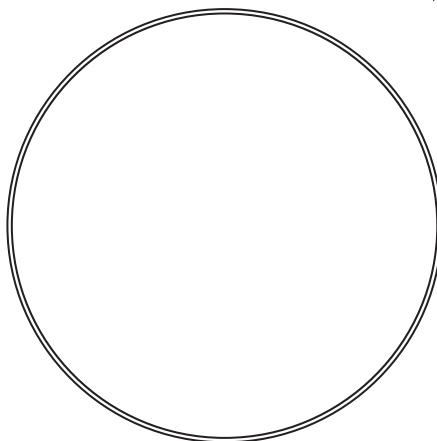

1:20

product code

L	3000 K	○	890585	●	890561
	4000 K			●	890578

XL	3000 K	○	890615	●	890592
	4000 K			●	890608

SORIA SQ

XS / S


LOONARI | 28
ceiling lights – SORIA SQ



Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

 Lifetime	 Beam angle	 CRI	 Voltage	 Protection class
30 000 h	90°	90	220-240 V	IP20
	XS	XS	S	S
Wattage	25 W	25 W	25 W	25 W
Colour temperature	1550 + 450 lm	1550 + 450 lm	2800 + 1200 lm	2800 + 1200 lm
Luminous flux	3000 K	3000 K / 4000 K	3000 K	3000 K / 4000 K
Dimming functionality	none	none	none	none
Mounting method	surface mounted	surface mounted	surface mounted	surface mounted
Colour	☐	☒	☐	☒

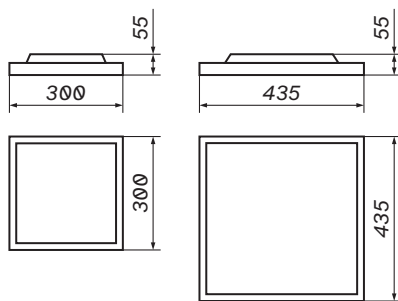

1:20


product code

XS	3000 K	○	894422	●	894408
	4000 K			●	894415
S	3000 K	○	894453	●	894439
	4000 K			●	894446

SORIA SQ

ceiling lights – SORIA SQ

M

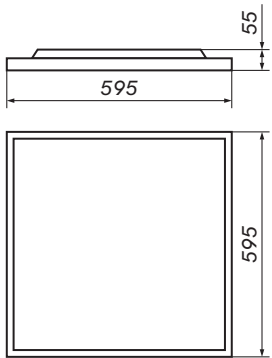

1:20

Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

Lifetime **30 000 h** Beam angle **90°** CRI **90** Voltage **220-240 V** Protection class **IP20**

	M	M
Wattage	25 W	25 W
Colour temperature	4200 + 1800 lm	4200 + 1800 lm
Luminous flux	3000 K	3000 K / 4000 K
Dimming functionality	none	none
Mounting method	surface mounted	surface mounted
Colour	☐	☒

product code

M 3000 K ☐ 894460 ☒ 894477
4000 K ☒ 894484



VIANA RO

LOONARI | 32
ceiling lights – VIANA RO


XS / S



Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

 Lifetime	 Beam angle	 CRI	 Voltage	 Protection class
30 000 h	90°	90	220-240 V	IP20
	XS	XS	S	S
Wattage	40 W	40 W	60 W	60 W
Colour temperature	3000 K	3000 K / 4000 K	3000 K	3000 K / 4000 K
Luminous flux	4000 lm	4000 lm	6000 lm	6000 lm
Dimming functionality	none	none	none	none
Mounting method	surface mounted	surface mounted	surface mounted	surface mounted
Colour	☐	☒	☐	☒

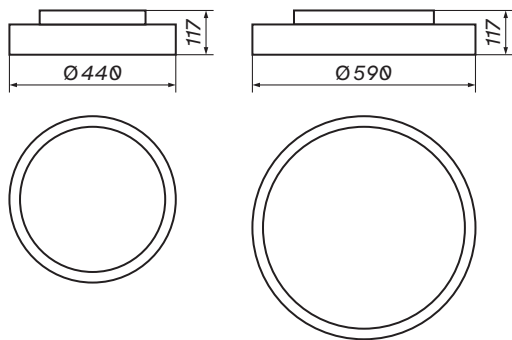

1:20

product code

XS	3000 K	○	890639	●	890622
	4000 K			●	894682
S	3000 K	○	890653	●	890646
	4000 K			●	894699

VIANA RO

LOONARI | 34
ceiling lights – VIANA RO

M / L / XL









Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

 Lifetime **30 000 h**  Beam angle **90°**  CRI **90**  Voltage **220-240 V**  Protection class **IP20**

	M	L	XL
Wattage	70 W	90 W	120 W
Colour temperature	3000 K	3000 K	3000 K
Luminous flux	7000 lm	9000 lm	12000 lm
Dimming functionality	none	none	none
Mounting method	surface mounted	surface mounted	surface mounted
Colour	☐ ☒	☐ ☒	☐ ☒

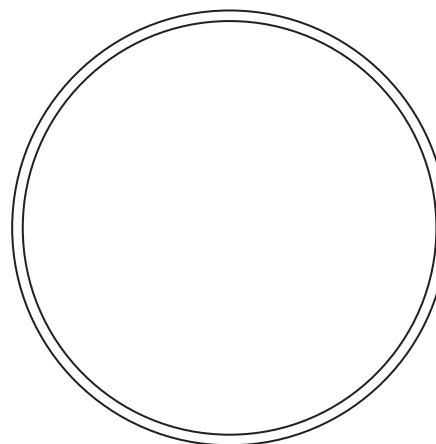

1:20

product code

M	3000 K	○	890677	●	890660
----------	--------	---	--------	---	--------

L	3000 K	○	890691	●	890684
----------	--------	---	--------	---	--------

XL	3000 K	○	890714	●	890707
-----------	--------	---	--------	---	--------

VIANA SQ

LOONARI | 36
ceiling lights – VIANA SQ

XS / S / M




Changing the mounting method:

Pendant set ☐ 890721 ☒ 890738

Lifetime **30 000 h** Beam angle **90°** CRI **90** Voltage **220-240 V** Protection class **IP20**

	XS	S	M
Wattage	25 W	40 W	60 W
Colour temperature	3000 K / 4000 K	3000 K / 4000 K	3000 K / 4000 K
Luminous flux	1550 + 450 lm	2800 + 1200 lm	4200 + 1800 lm
Dimming functionality	none	none	none
Mounting method	surface mounted	surface mounted	surface mounted
Colour	☒	☒	☒

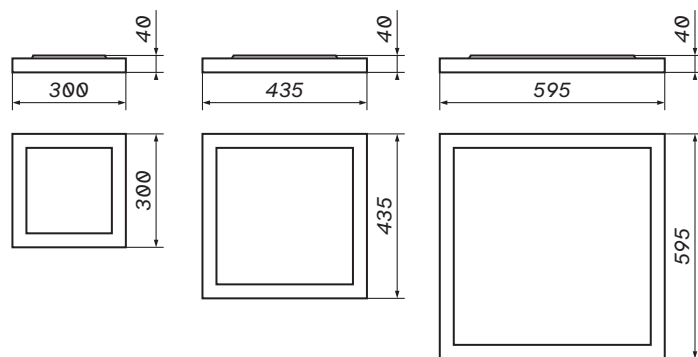

1:20

product code

XS	3000 K	●	894491
	4000 K	●	894507
S	3000 K	●	894514
	4000 K	●	894521
M	3000 K	●	894538
	4000 K	●	894545

