

Pendant

HOME & DECOR
by LOONARI



LOONARI



PENDANT



← JOIN US ON INSTAGRAM

Catalog current status: **October, 2024**

All measurements and technical data given in the catalogue are informational only. Due to the production process actual parameters of the products may slightly differ from information provided in the catalogue.

The most up-to-date data and actual technical information can be found on product cards, manuals or our website: **loonari.eu**

LOONARI sp. z o.o. reserves the right to amend presented materials and technical parameters without prior notice.

LOONARI sp. z o.o. is not liable for any printing mistake. All images in the catalogue are protected with authors' rights. Products and colours presented in the pictures are illustrative and may visually differ from actual products.

LOONARI mark has been registered at the EUIPO.

GET IN CONTACT

We're more than just a lamp provider – we're your partner in creating the perfect lighting. Starting with lighting design and continuing through the selection of the right products and control system, we will support you throughout the system set up and commissioning process.

If needed, you can count on our post-warranty service too. Tell us about your project: **hello@loonari.eu**

DISTRIBUTION



LOONARI sp. z o.o.
Podmiejska 7
Piekary Śląskie
PL41940, Poland
+48 539 982 819

CONTENTS PAGE

PENDANT

Tocca	15
Bosa SM	24
Bosa RC	25
Arta SM	26
Arta RC	28
Laredo	32
Ebro SM P	34
Crosti Atina	36
Crosti Oria	38



photograph – **Adam Grzesik** / project – **Maja Dembowska-Pisarek** dembowska.com.pl, **Katarzyna Jagiełło-Wróbel** **JAG studio**





photograph – Sylwia Dominikowska **HOUSESTUDIO** / stylist – Beata Gieżyńska Pracownia Projektowa 180*
















TOCCA

LOONARI | 15
pendant – TOCCA



1:4

 Lifetime 30 000 h	 Beam angle 38°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---


Wattage	5 × 6 W	5 × 6 W
Colour temperature	5 × 90 lm	5 × 90 lm
Luminous flux	3000 K	4000 K
Dimming functionality	none	none
Mounting method	recessed	recessed
Mounting hole	Ø 21 mm + Ø 82 mm	Ø 21 mm + Ø 82 mm
Colour	 	

product code		
3000 K		457075
		457068
4000 K		459567


TOCCA'S MODULARITY SYSTEM

The Tocca system consists of elements connected by wires, allowing the setup to be easily modified and styled as needed. Adjustable line lengths and movable bases allow you to create unique compositions perfect for your interior design.


Top view — single-line layout with equal gaps




Front view — same length line

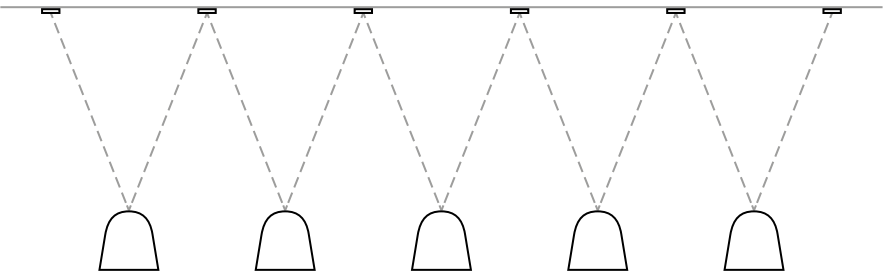


Front view — adjustable length line

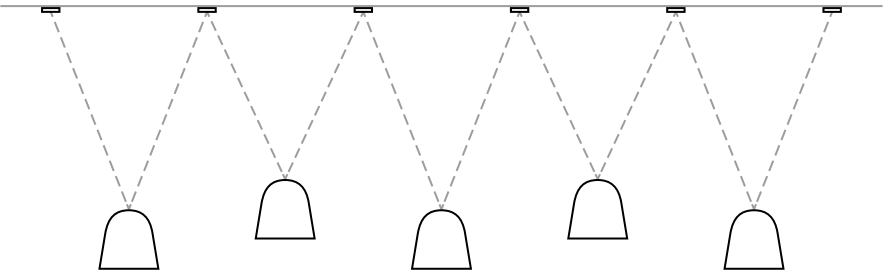


Exemplary composition

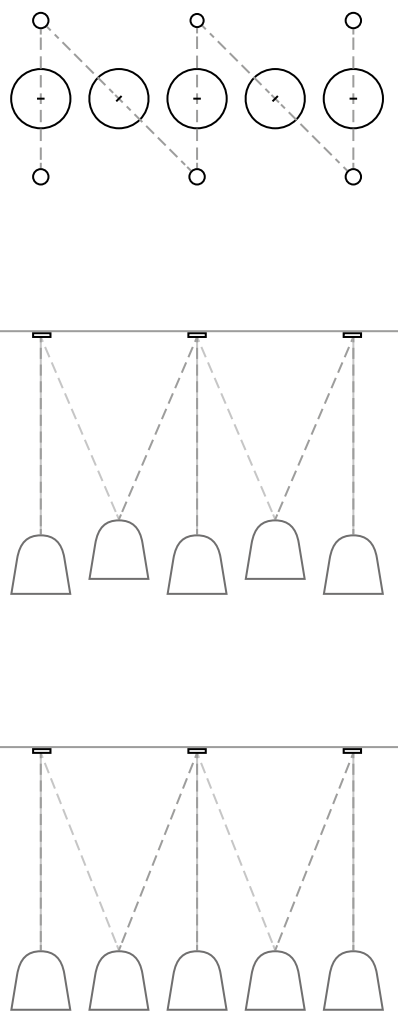


Illustrative drawing — adjustable length line

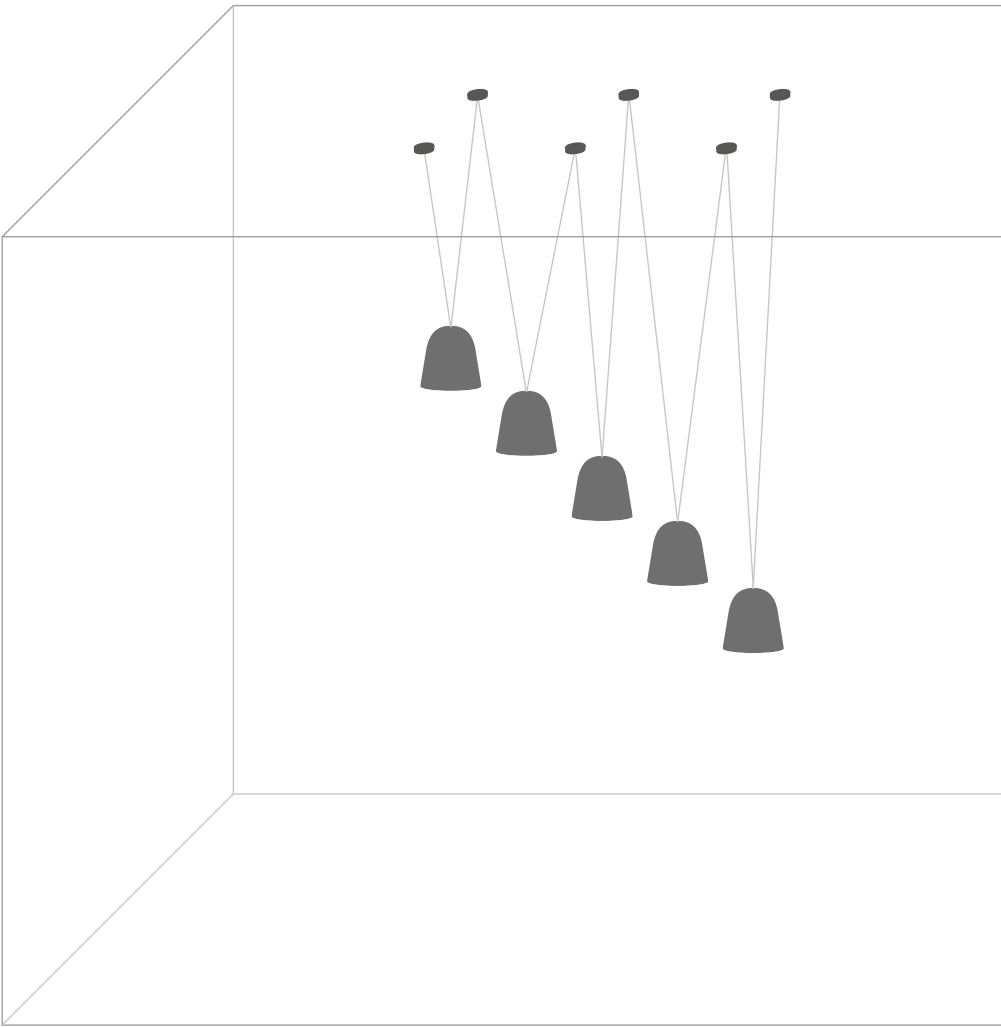


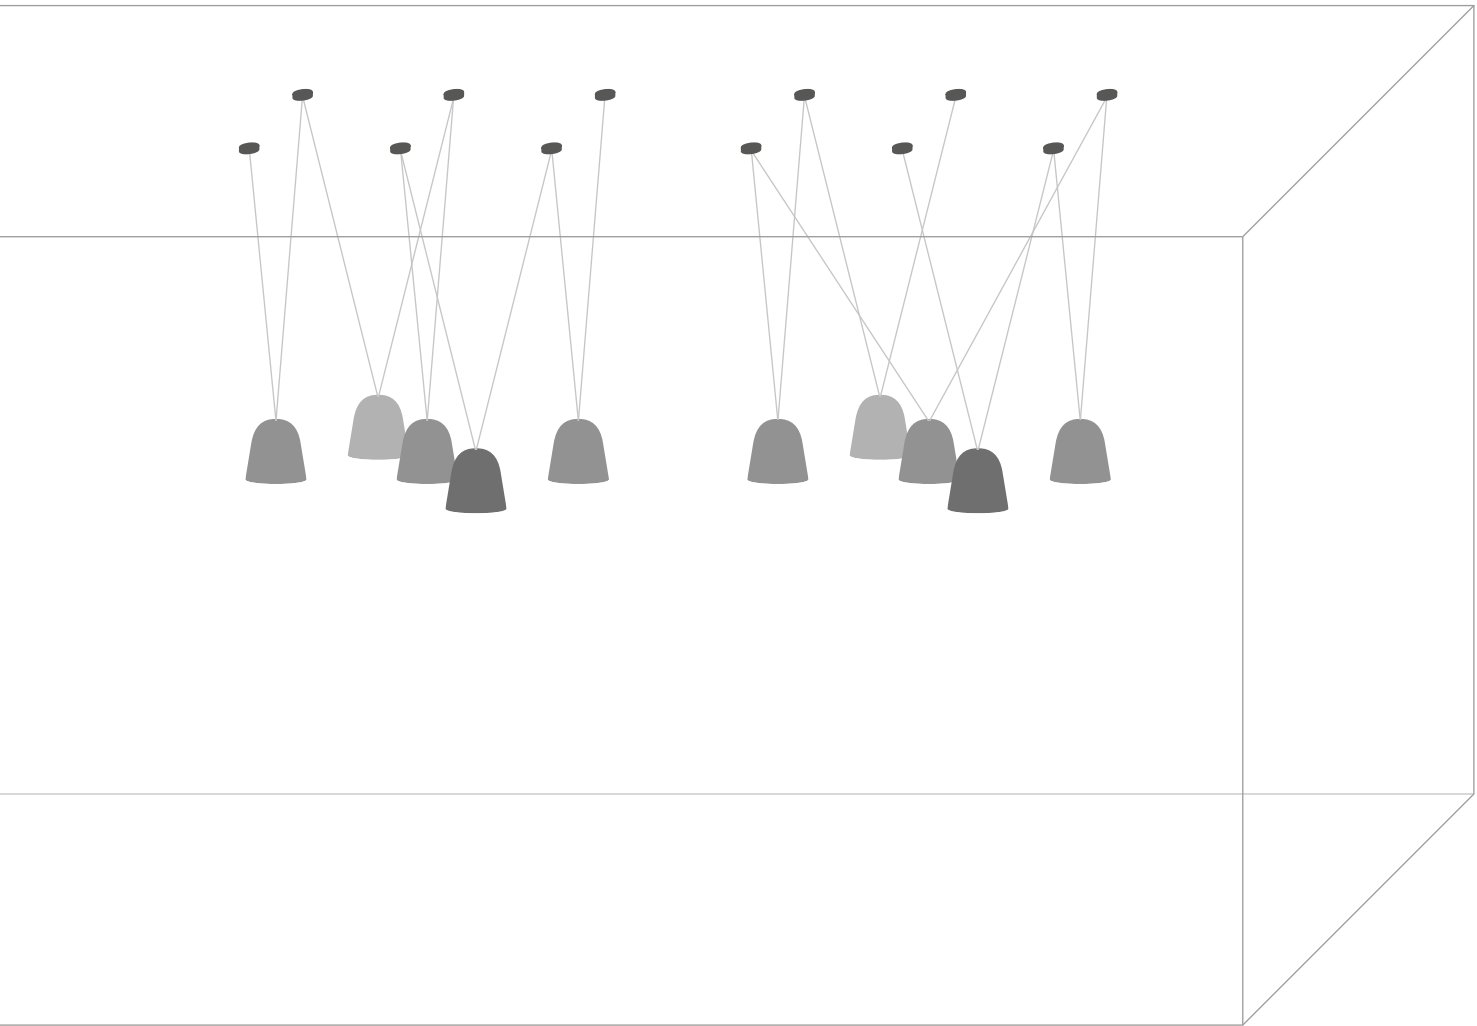


Top view — exemplary compositions

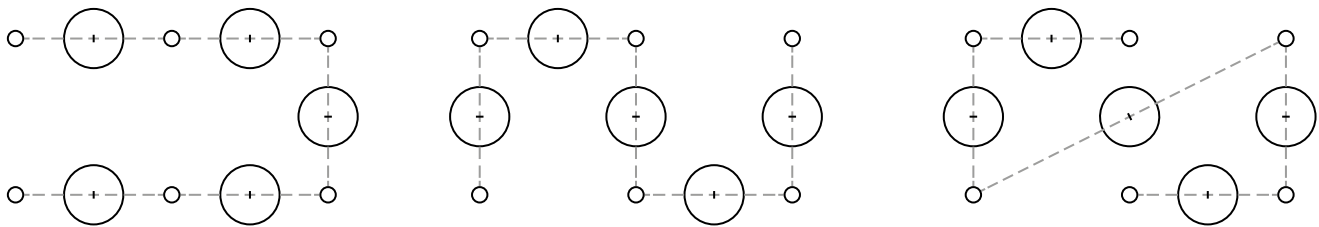







Front view — same length line

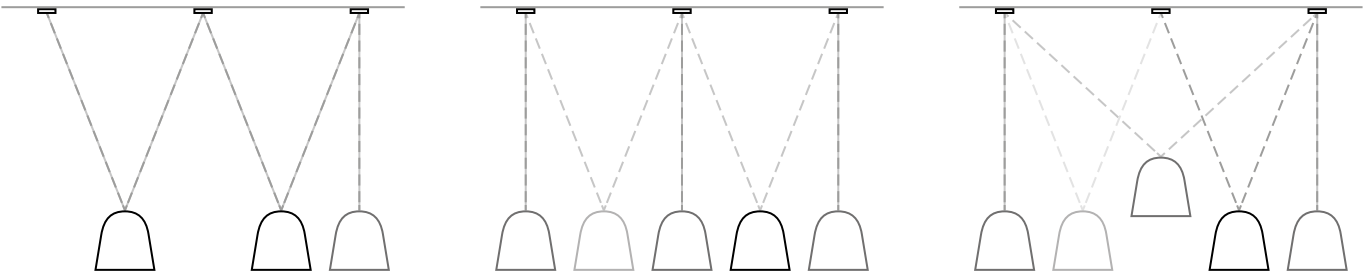


Front view — adjustable length line

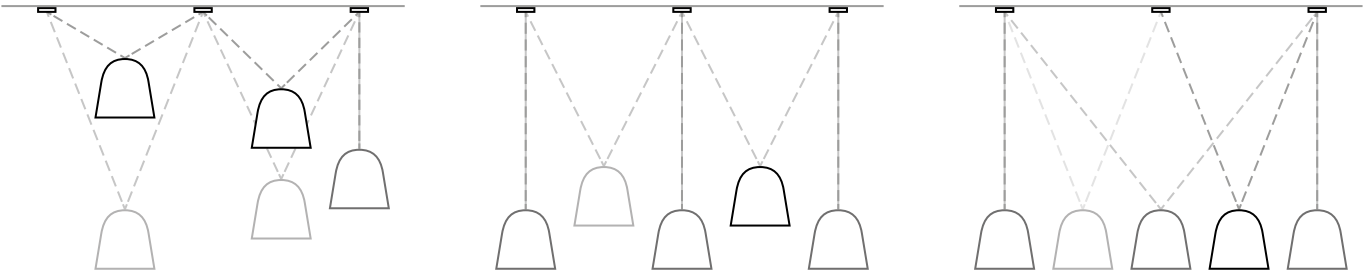



Top view — exemplary compositions

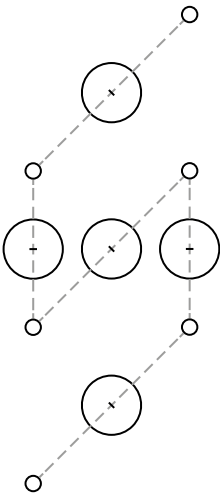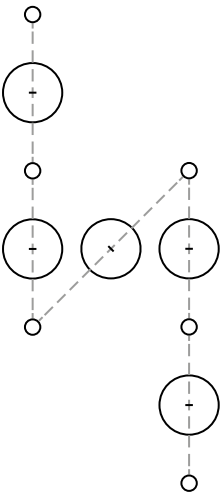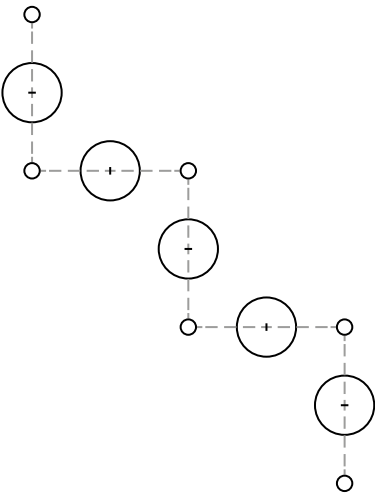

Top view — exemplary compositions for double set

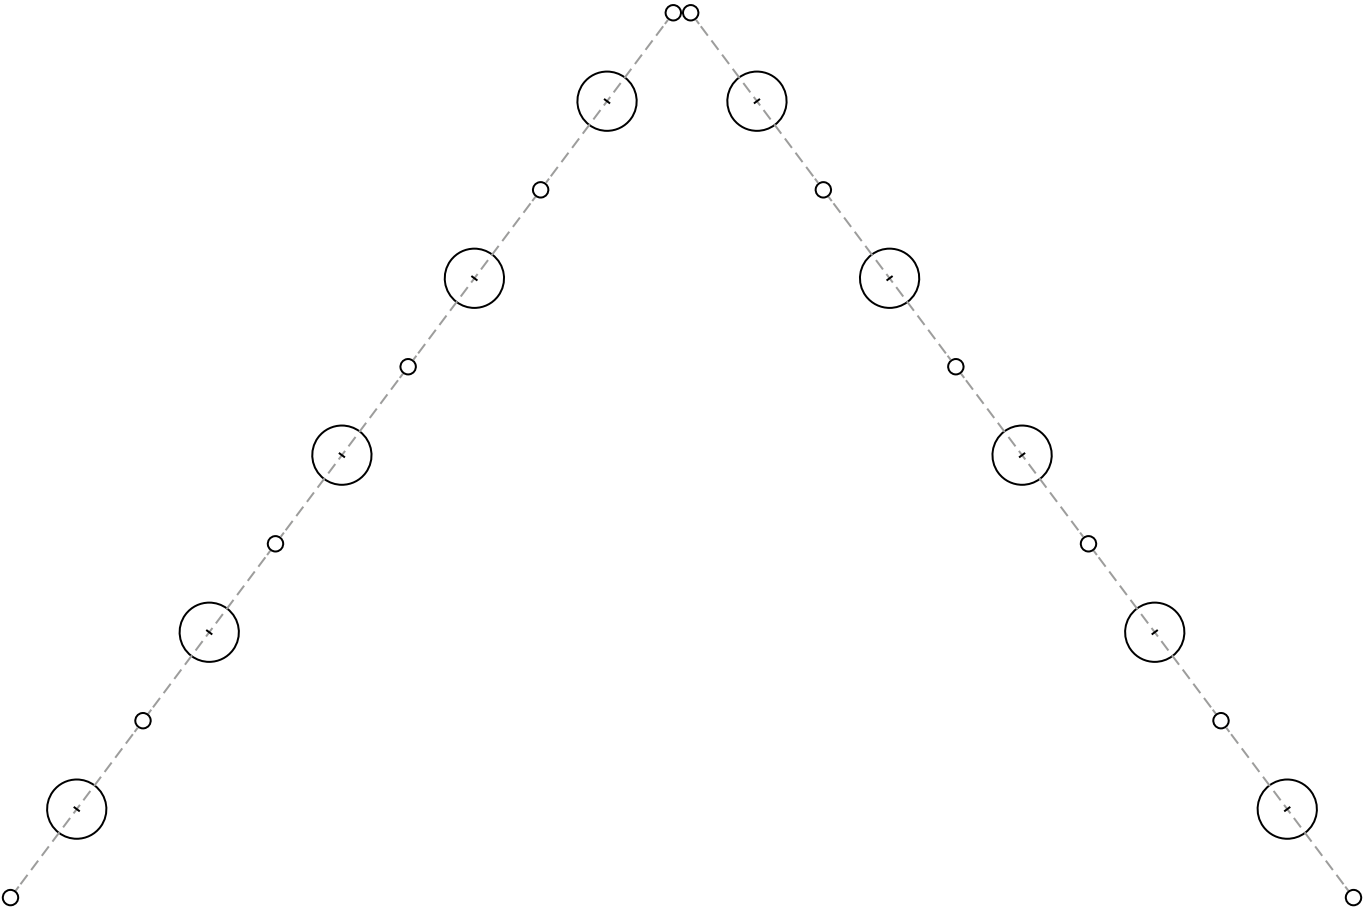


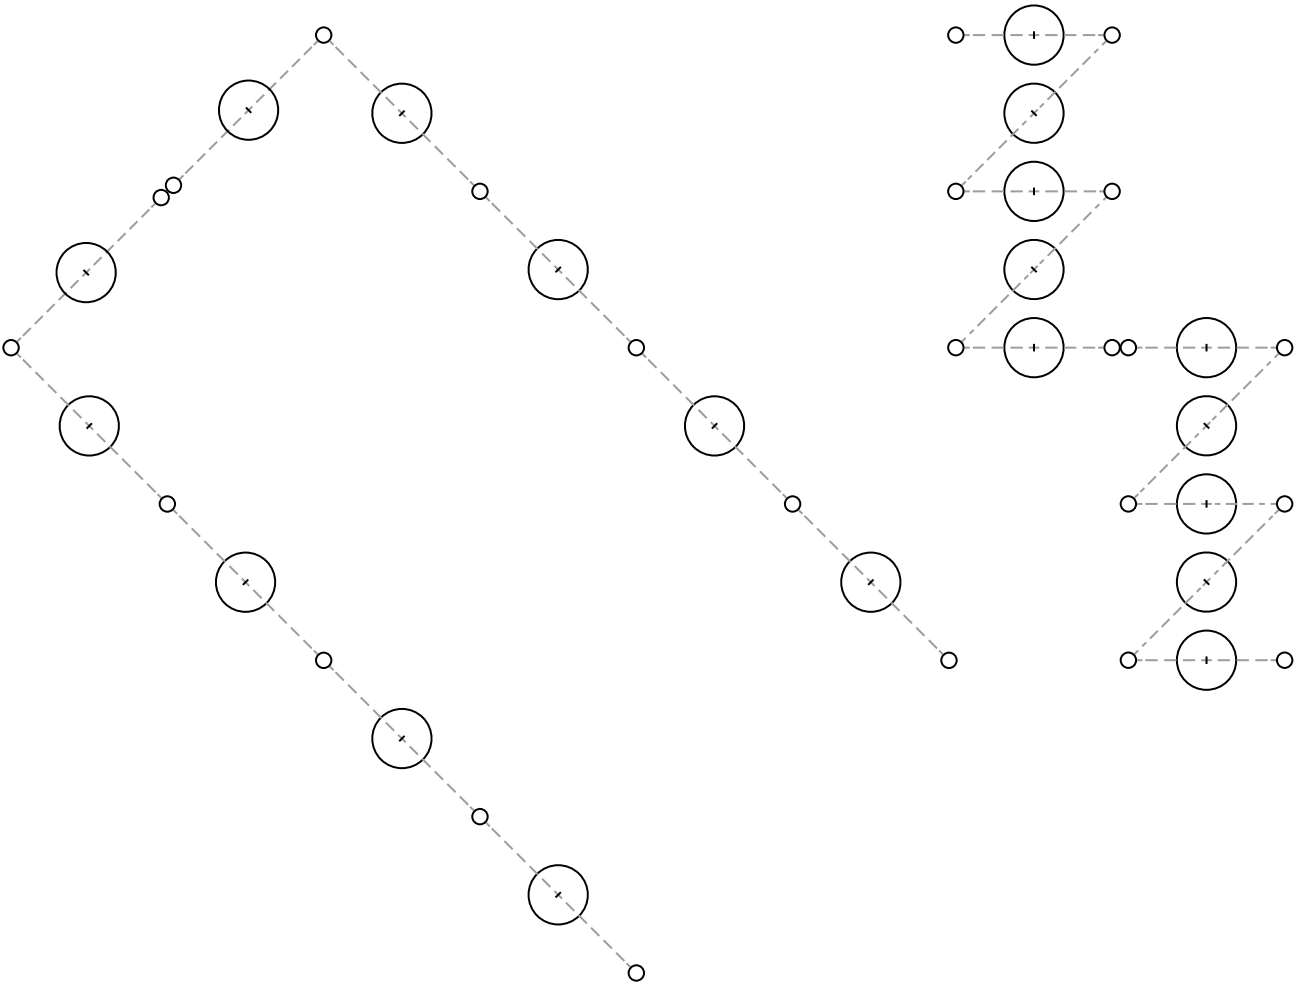

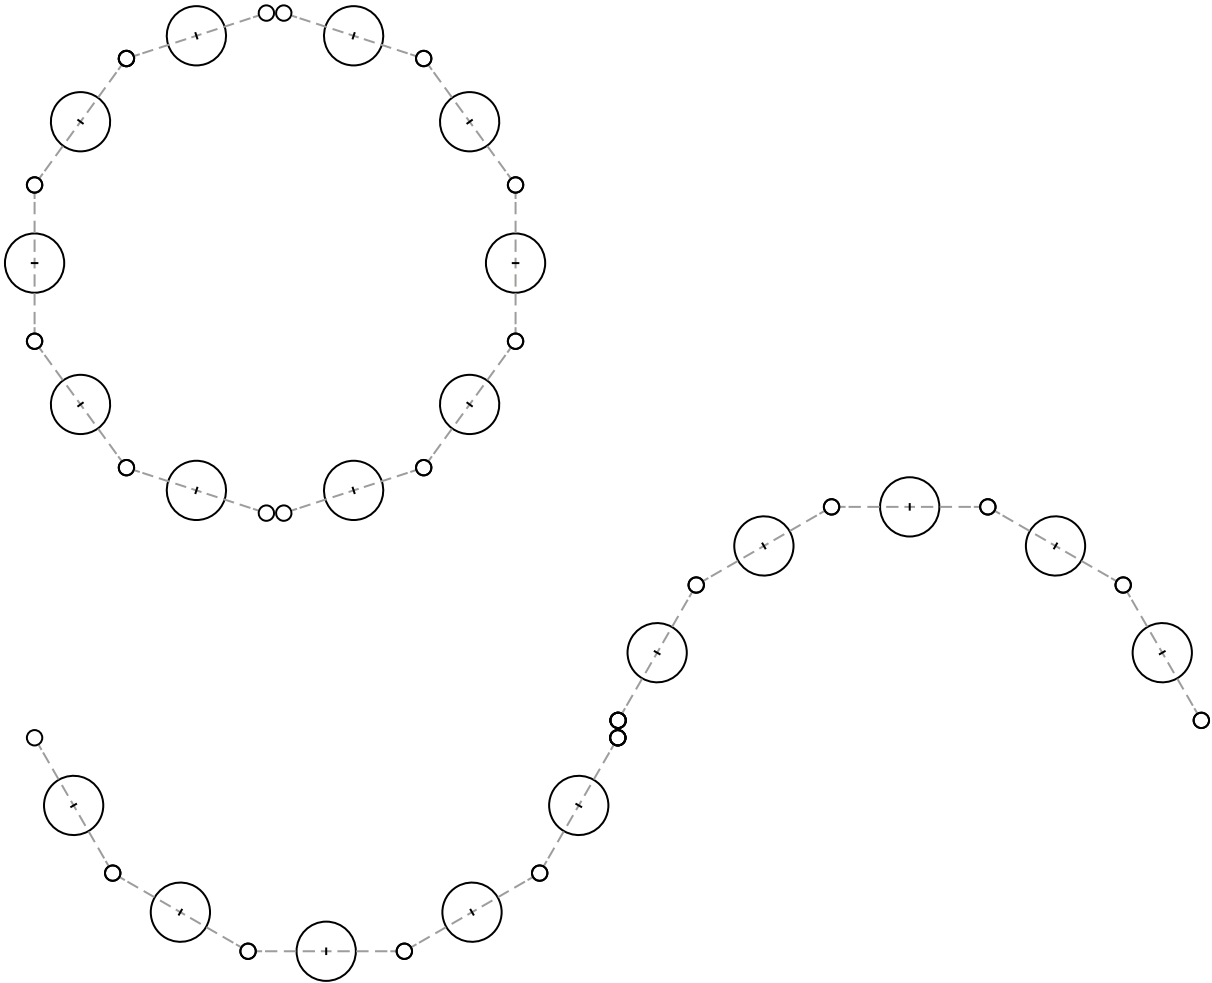

BOSA SM

LOONARI | 24
pendant – BOSA SM

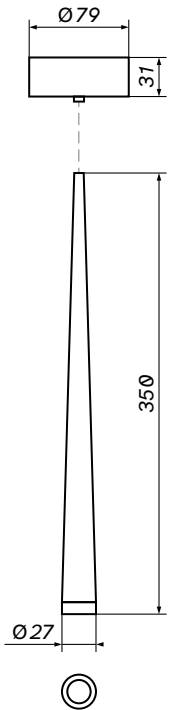

1:6

 Lifetime
30 000 h

 Beam angle
18°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 7 W
Colour temperature 305 lm
Luminous flux 3000 K

Dimming functionality none
Mounting method surface mounted

Colour  



product code

 456580

 456573

BOSA RC

LOONARI | 25
pendant – BOSA RC

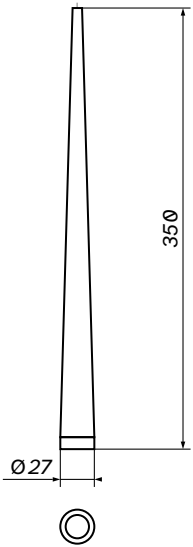

1:6

 Lifetime
30 000 h

 Beam angle
18°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 7 W
Colour temperature 305 lm
Luminous flux 3000 K
Dimming functionality none
Mounting method recessed
Mounting hole Ø 87 mm
Colour  

product code
 456603
 456597

ARTA SM

S / M / L

LOONARI | 26
pendant – ARTA SM



 Lifetime
30 000 h

 Beam angle
18°

 CRI
90










 Voltage
220-240 V

 Protection class
IP20

Wattage 7 W
Colour temperature 213 lm
Luminous flux 3000 K
Dimming functionality none
Mounting method surface mounted
Colour ☐ ☒

product code

S	☐	456610	☒	456627
M	☐	456634	☒	456641
L	☐	456658	☒	456665



ARTA RC

S / M / L

LOONARI | 28
pendant - ARTA RC



 Lifetime
30 000 h

 Beam angle
18°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20


Wattage 7 W
Colour temperature 213 lm
Luminous flux 3000 K
Dimming functionality none
Mounting method recessed
Mounting hole Ø 87 mm
Colour ☐ ☒

product code

S ☐ 895948 ☒ 895955

M ☐ 895962 ☒ 895979


L ☐ 895986 ☒ 895993

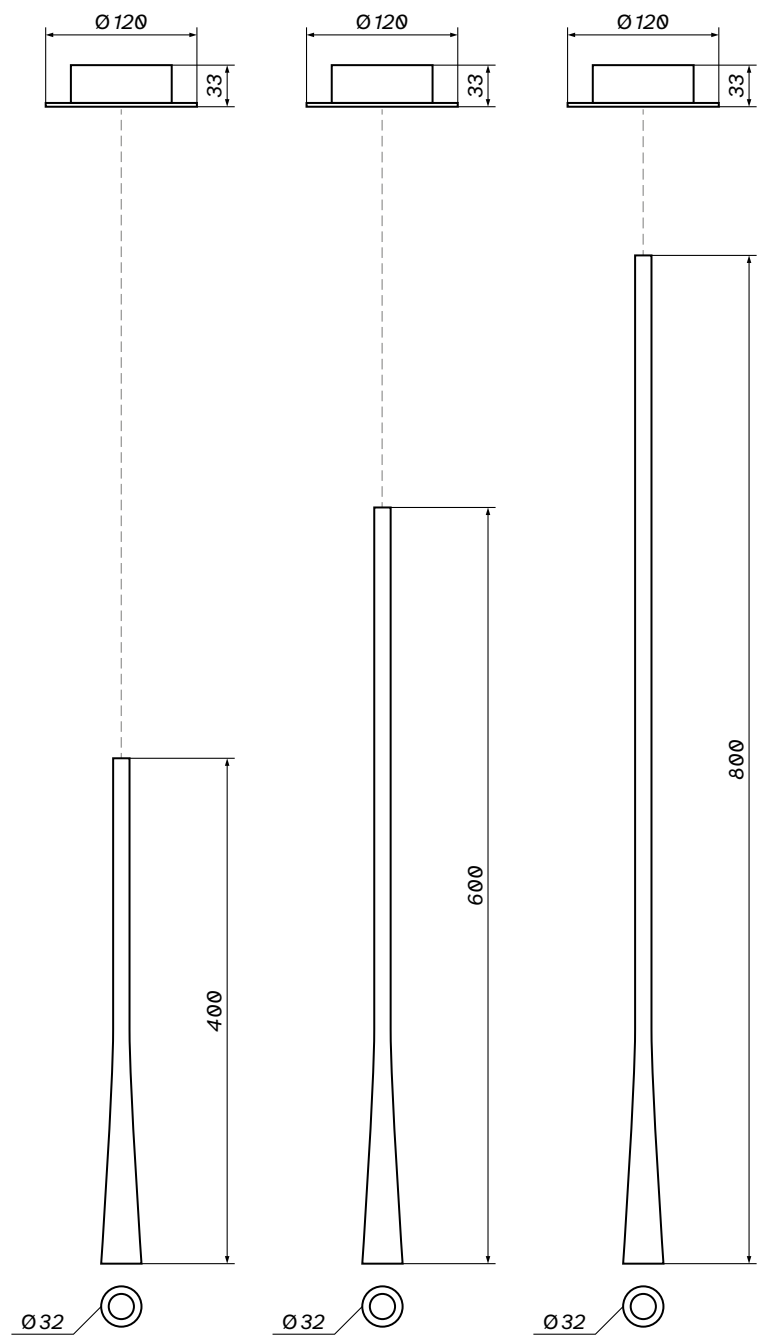






S / M / L

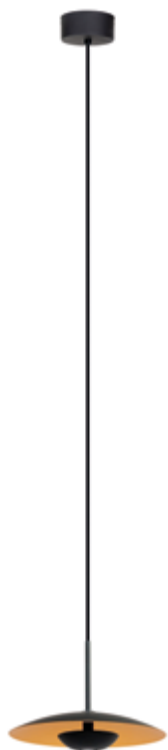

	S / M	L			
Wattage	12 W	18 W	product code		
Colour temperature	2 × 480 lm	480 lm + 760 lm	S		890936
Luminous flux	3000 K	3000 K			
Dimming functionality	none	none	M		890943
Mounting method	surface mounted	surface mounted			
Colour			L		890950

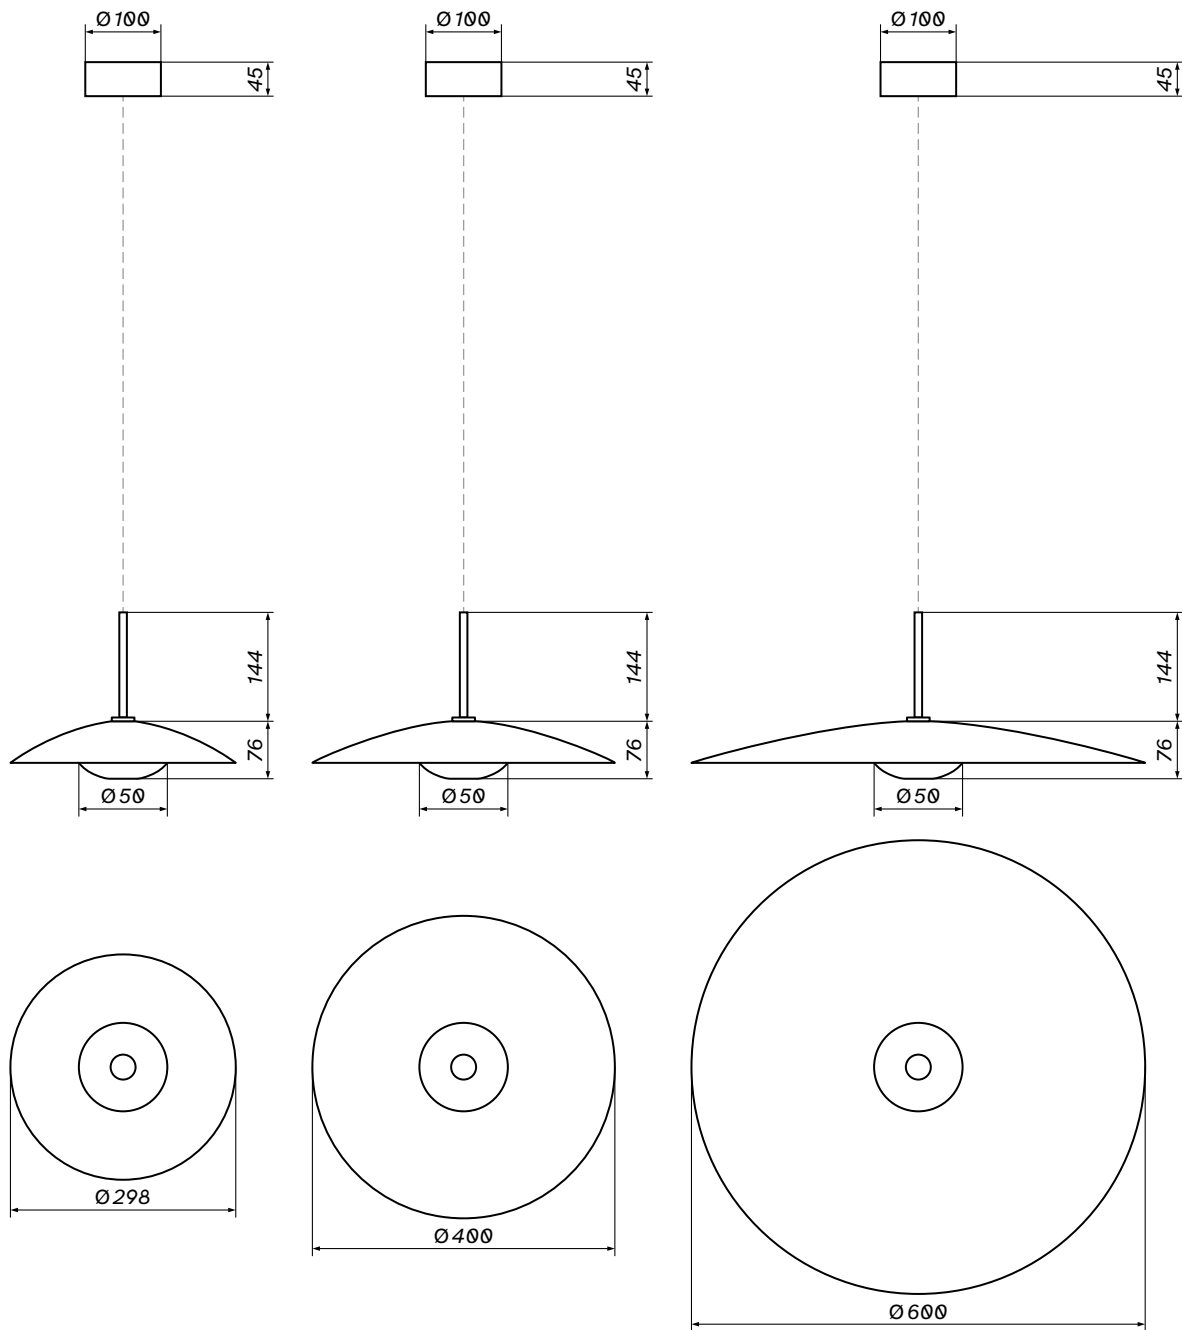

EBRO SM P

LOONARI | 34
pendant – EBRO SM P





 Lifetime 50 000 h	 Beam angle 330°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	---	--	--	---

Wattage	7 W	10 W
Colour temperature	280 lm	500 lm
Luminous flux	3000 K	3000 K
Dimming functionality	none / optional	none / optional
Mounting method	surface mounted	surface mounted
Colour	☐ ☒	☐ ☒



product code

7 W	☐	707067	☒	707050
10 W	☐	707081	☒	707074



max 1800

max 1800



CROSTI ATINA

S / M / L / XL

LOONARI | 36

pendant - CROSTI ATINA




 Voltage
220-240 V

 Protection class
IP44

Maximum wattage **50 W**
Light socket **G9**
Mounting method **surface mounted**
Colour ☐ ☒

product code

S	☐	707180	☒	707227
M	☐	707197	☒	707234
L	☐	707203	☒	707241
XL	☐	707210	☒	707258

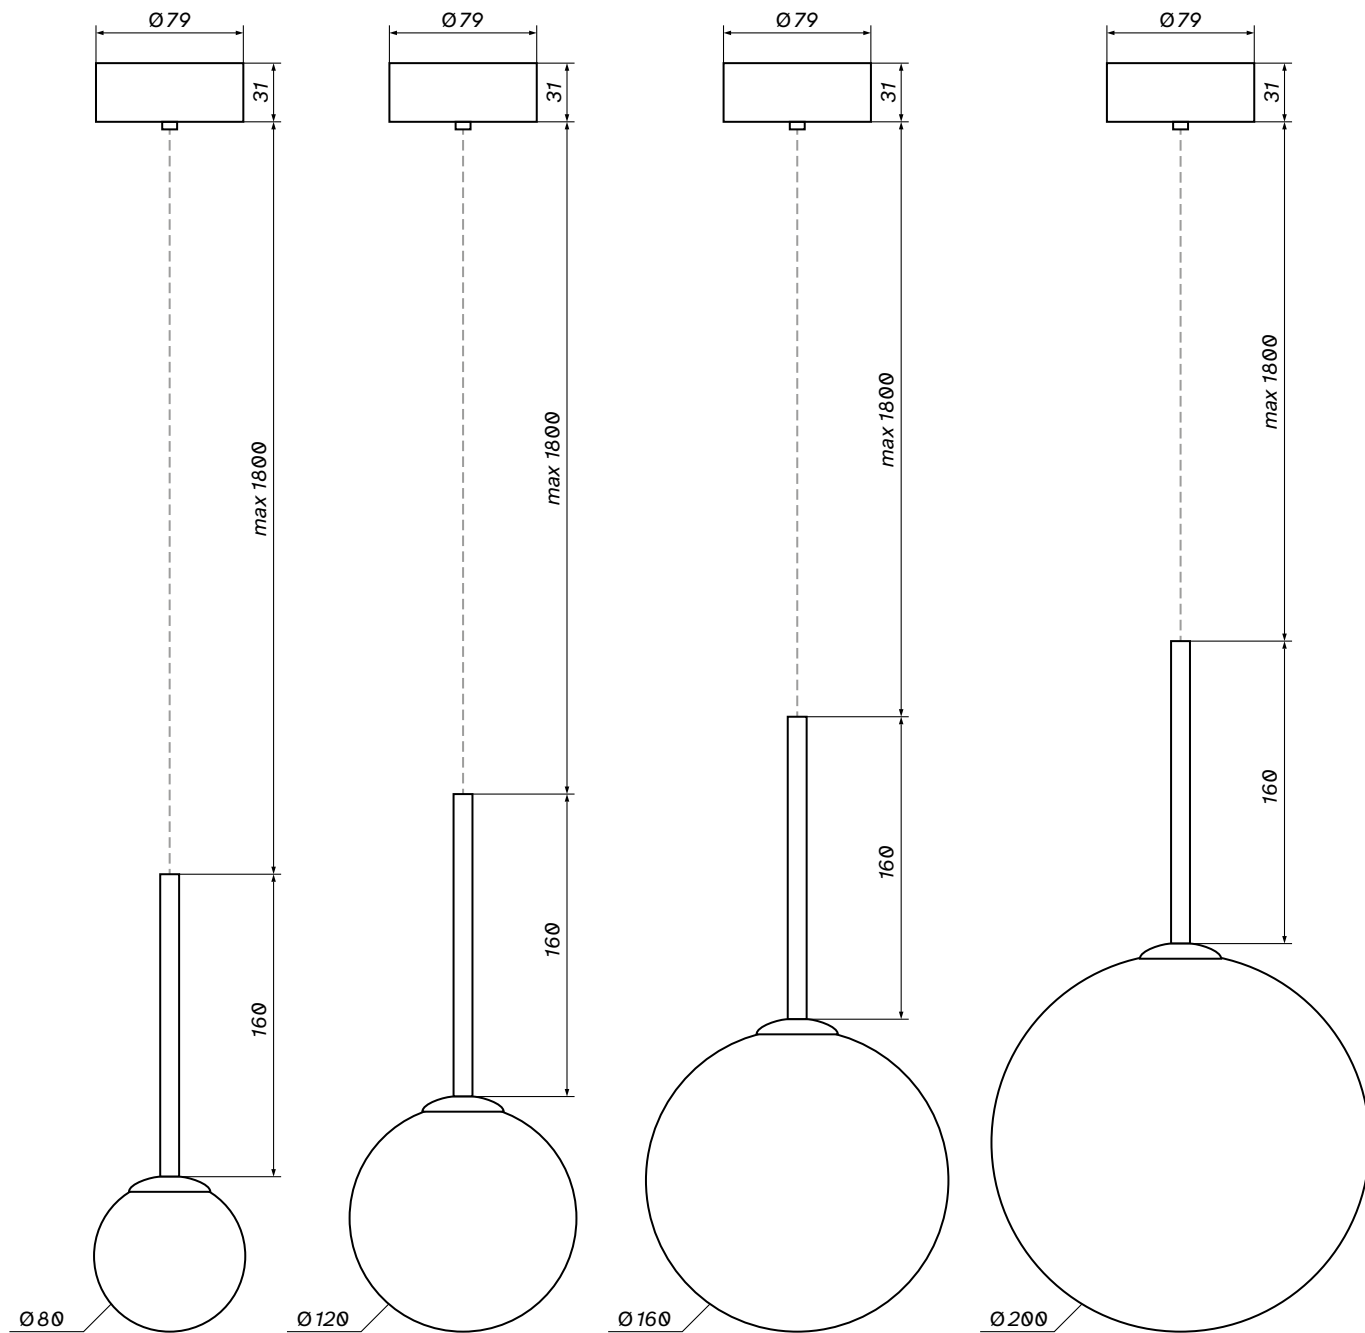

CROSTI ORIA

LOONARI | 38

pendant – ORIA



 Voltage
220-240 V

 Protection class
IP44

Maximum wattage 50 W


Light socket G9

Mounting method surface mounted

Colour ●

product code

● 707302

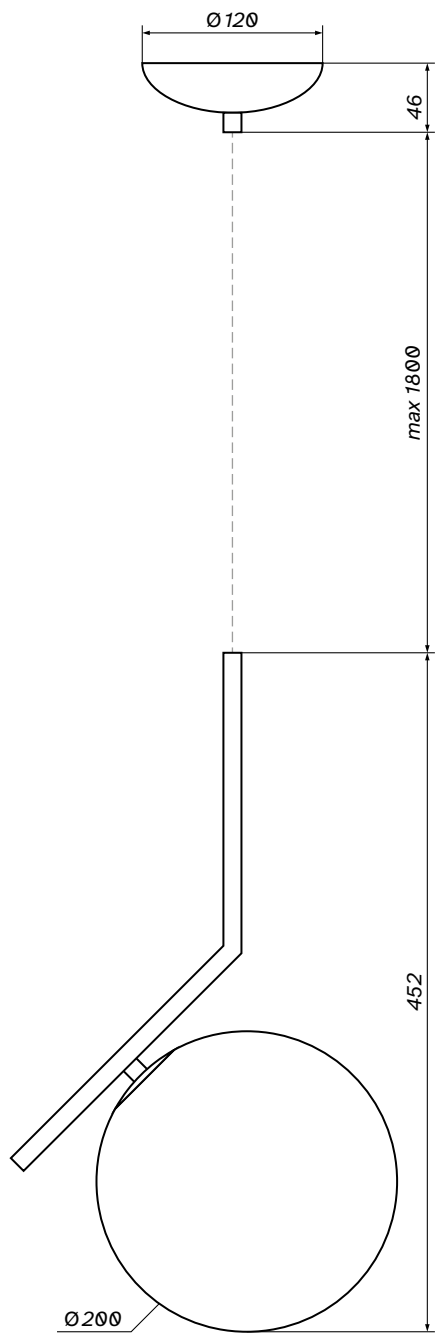

1:5



