

Recessed

HOME & DECOR

by LOONARI



LOONARI



RECESSED



← JOIN US ON INSTAGRAM

Catalog current status: **October, 2024**

All measurements and technical data given in the catalogue are informational only. Due to the production process actual parameters of the products may slightly differ from information provided in the catalogue.

The most up-to-date data and actual technical information can be found on product cards, manuals or our website: **loonari.eu**

LOONARI sp. z o.o. reserves the right to amend presented materials and technical parameters without prior notice.

LOONARI sp. z o.o. is not liable for any printing mistake. All images in the catalogue are protected with authors' rights. Products and colours presented in the pictures are illustrative and may visually differ from actual products.

LOONARI mark has been registered at the EUIPO.

GET IN CONTACT

We're more than just a lamp provider – we're your partner in creating the perfect lighting. Starting with lighting design and continuing through the selection of the right products and control system, we will support you throughout the system set up and commissioning process.

If needed, you can count on our post-warranty service too. Tell us about your project: **hello@loonari.eu**

DISTRIBUTION



LOONARI sp. z o.o.
Podmiejska 7
Piekary Śląskie
PL41940, Poland
+48 539 982 819

CONTENTS PAGE

RECESSED

Archi	22	Larsi S	42	Qubo RO	72
Archi Wall Washer	24	Larsi L	44	Qubo SQ	74
Arcos IP	25	Mezo RO	46	Teri RO	76
Atono	26	Mezo RO IP	48	Teri SQ	78
Ferte RC	27	Mezo SQ	50	Crosti Lacce RC	81
Lapilo RC	28	Mezo SQ IP	52	Crosti Lacce RC Slim	82
Otti	29	Modi RO	54	Crosti Lana RO S	83
Stillo RO	30	Modi SQ	56	Crosti Lapilo RC	84
Stillo SQ	32	Modi SQ Due	58	Crosti Larsi S	85
Stillo Due	34	Modi SQ Tre	60	Crosti Larsi L	86
Delle RO	36	Pero RO	62	Crosti Modi RO	87
Delle SQ	37	Pero RO IP	64	Crosti Modi SQ	88
Delle Due	38	Pero SQ	66	Crosti Modi SQ DUE	89
Greti	39	Pero SQ IP	68	Crosti Modi SQ TRE	90
Lugo RC	40	Pradi SQ	70	Crosti Orris	91



Crosti Pero RO	92
Crosti Pero SQ	93
Crosti Pero RO RT	94
Crosti Qubo RO	96
Crosti Qubo SQ	97
Crosti Teri RO	98
Crosti Teri SQ	99
Crosti Viedo	101
Crosti Gavi	102
Crosti Gavi DUE	103
Crosti Lana RO L	105
Crosti Lana SQ L	106
Crosti Lana SQ Due	107



photograph – **Adam Grzesik** / project – **Maja Dembowska-Pisarek** dembowska.com.pl, **Katarzyna Jagiełło-Wróbel** JAG studio












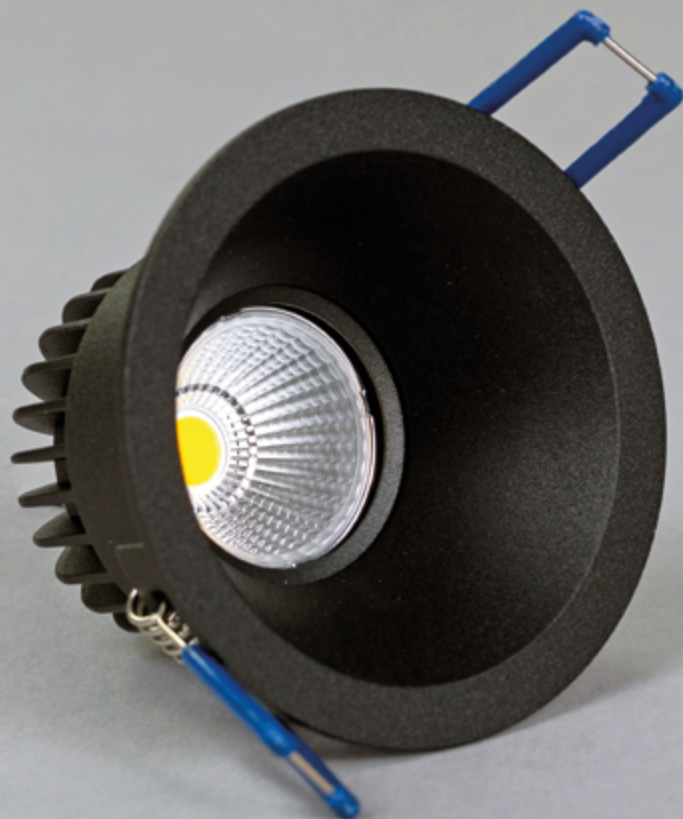





exposition – **MERA** / photograph – **Radostaw Sobik**

exposition – **MERA** / photograph – **Radostaw Sobik**






exposition – **MERA** / photograph – **Radostaw Sobik**

exposition – **NERA** / photograph – **Radostaw Sobik**








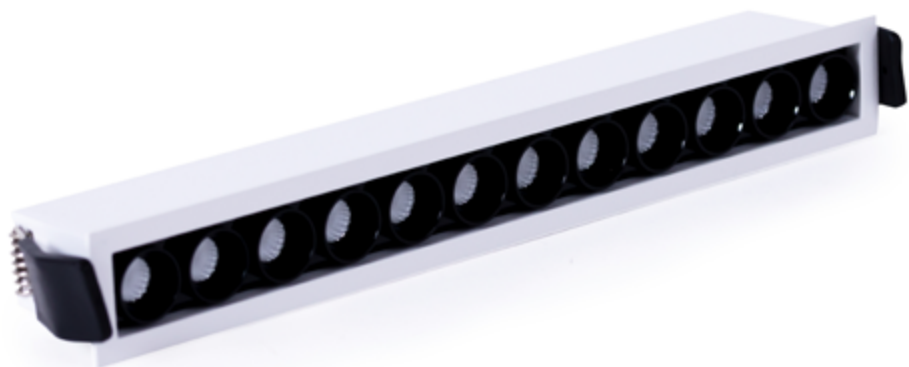

 Lifetime 30 000 h	 Beam angle 36°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
	S	M	L	
Wattage	3 W	8 W	16 W	
Colour temperature	3000 K / 4000 K	3000 K / 4000 K	3000 K / 4000 K	
Luminous flux	180 lm	480 lm	960 lm	
Dimming functionality	none / opcjonal	none / optional	none / optional	
Mounting hole	65 × 27 mm	122 × 27 mm	236 × 27 mm	
Minimum depth	41 mm	41 mm	41 mm	
Colour	 	 	 	

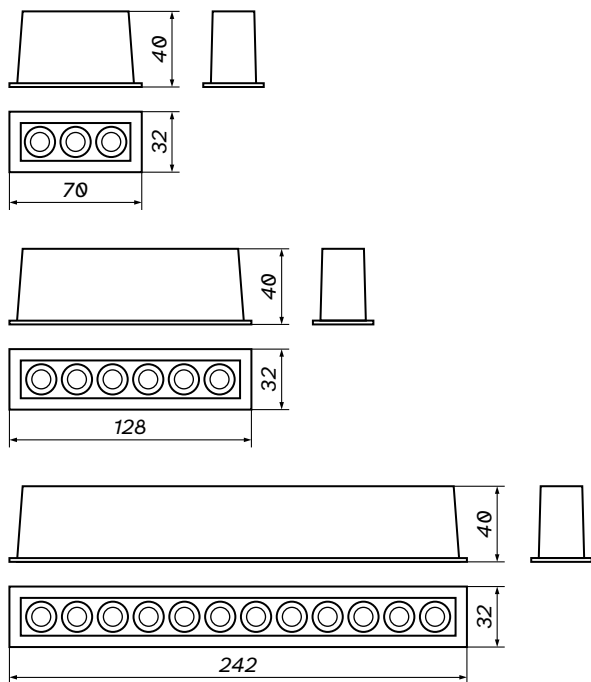

1:4

product code


S	3000 K	○	701331	●	701348
	4000 K	○	701355	●	701362
M	3000 K	○	701379	●	701386
	4000 K	○	701393	●	701409
L	3000 K	○	701416	●	701423
	4000 K	○	701430	●	701447



ARCHI WALL WASHER

LOONARI | 24

recessed – ARCHI WALL WASHER

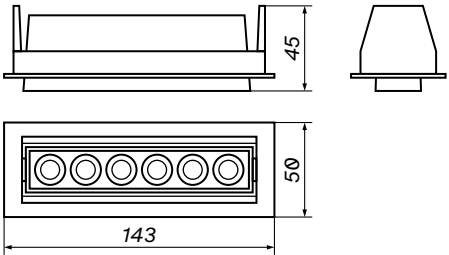

1:4


 Lifetime 30 000 h	 Beam angle 36°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K / 4000 K
Luminous flux	480 lm
Dimming functionality	none / optional
Mounting hole	136 × 43 mm
Minimum depth	41 mm
Colour	☐ ☒

product code			
3000 K	☐	701454	☒ 701461
4000 K	☐	701478	☒ 701485

ARCOS IP

LOONARI | 25
recessed – ARCOS IP

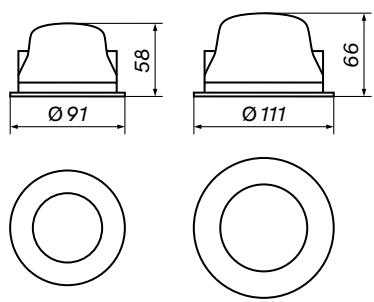

1:6

 **Lifetime**
30 000 h

 **Beam angle**
60°

 **CRI**
80

 **Voltage**
220-240 V

 **Protection class**
IP65




Wattage	10 W	15 W
Colour temperature	3000 K 4000 K	3000 K 4000 K
Luminous flux	875 lm 910 lm	1442 lm 1500 lm
Dimming functionality	none / optional	none / optional
Mounting hole	Ø 82 mm	Ø 99 mm
Minimum depth	65 mm	70 mm
Colour	○	○

product code			
10 W	3000 K	○	450687
	4000 K	○	450694
15 W	3000 K	○	450700
	4000 K	○	450717

ATONO

LOONARI | 26

recessed - ATONO

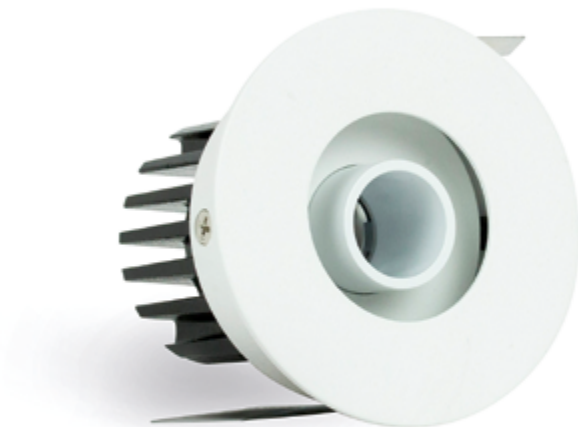

1:4

 Lifetime 30 000 h	 Beam angle 30°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	9 W
Colour temperature	3000 K
Luminous flux	675 lm
Dimming functionality	none / optional
Mounting hole	Ø 62 mm
Minimum depth	65 mm
Colour	○ ●


product code

○	457198
●	457181

FERTE RC

LOONARI | 27

recessed – FERTE RC

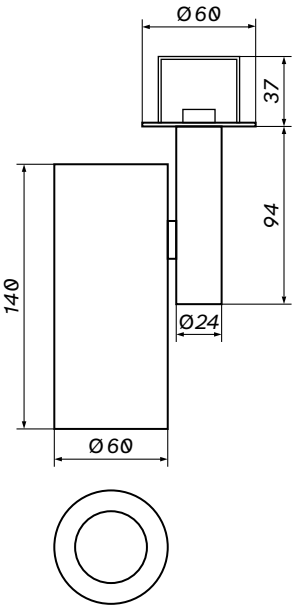

1:4

 **Lifetime**
30 000 h

 **Beam angle**
38°

 **CRI**
80

 **Voltage**
220-240 V



 **Protection class**
IP20

Wattage	10 W
Colour temperature	3000 K / 4000 K
Luminous flux	750 lm
Dimming functionality	none
Mounting hole	Ø 50 mm
Minimum depth	40 mm
Colour	○ ●

product code			
3000 K	○	894903	● 894927
4000 K	○	894910	● 894934

LAPILO RC

LOONARI | 28
recessed – LAPILO RC




1:4

 Lifetime 30 000 h	 Beam angle 40°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K
Luminous flux	660 lm
Dimming functionality	PC
Mounting hole	Ø 68 mm
Minimum depth	85 mm
Colour	  

product code	
	456719
	456726
	456733

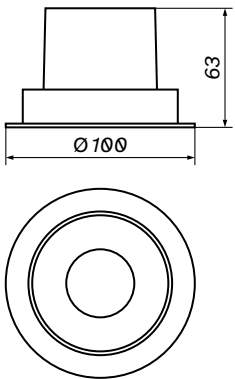

1:4

 Lifetime	 Beam angle	 CRI	 Voltage	 Protection class
30 000 h	38° / 58°	90	220-240 V	IP20
Wattage	38° 10 W	58° 10 W		
Colour temperature	3000 K	3000 K / 4000 K		
Luminous flux	750 lm	750 lm		
Dimming functionality	none / optional	none / optional		
Mounting hole	Ø 95 mm	Ø 95 mm		
Minimum depth	70 mm	70 mm		
Colour	○ ●	○ ●		
product code				
38°	3000 K	○	457082	● 457105
58°	3000 K	○	457099	● 457112
	4000 K	○	894002	● 894019

STILLO RO

LOONARI | 30
recessed – STILLO RO



 **Lifetime**
30 000 h


 **Beam angle**
24° / 36°

 **CRI**
80

 **Voltage**
220-240 V

 **Protection class**
IP20

Wattage	8 W	15 W
Colour temperature	3000 K 4000 K	3000 K 4000 K
Luminous flux	620 lm 650 lm	1270 lm 1310 lm
Dimming functionality	none / optional	none / optional
Mounting hole	Ø 95 mm	Ø 138 mm
Minimum depth	50 mm	70 mm
Colour	○ ●	○ ●

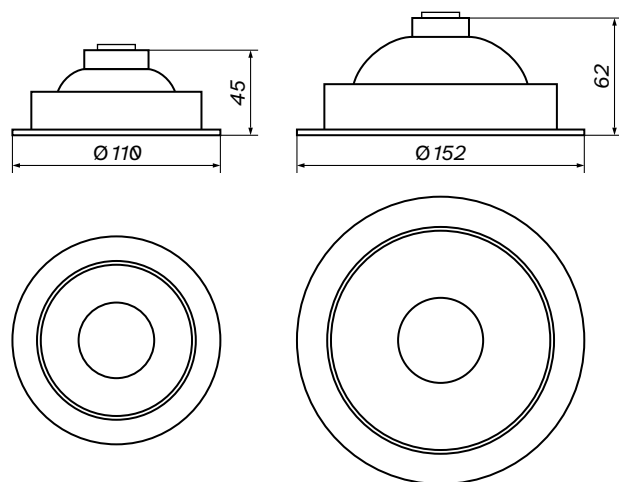

1:4

product code

8 W	3000 K	○	24°	892596	36°	450885
		●	24°	892602	36°	450892
	4000 K	○	24°	892619	36°	450908
		●	24°	892626	36°	450915
15 W	3000 K	○	24°	892633	36°	450922
		●	24°	892640	36°	450939
	4000 K	○	24°	892657	36°	450946
		●	24°	892664	36°	450953

STILLO SQ

LOONARI | 32
recessed – STILLO SQ



 **Lifetime**
30 000 h

 **Beam angle**
24° / 36°

 **CRI**
80

 **Voltage**
220-240 V





 **Protection class**
IP20

Wattage	8 W	15 W
Colour temperature	3000 K 4000 K	3000 K 4000 K
Luminous flux	620 lm 650 lm	1272 lm 1310 lm
Dimming functionality	none / optional	none / optional
Mounting hole	Ø 95 mm	Ø 138 mm
Minimum depth	50 mm	70 mm
Colour	○ ●	○ ●



product code

8 W	3000 K	○	24°	892671	36°	450960
		●	24°	892688	36°	450977
	4000 K	○	24°	892695	36°	450984
		●	24°	892701	36°	450991
		●	24°	892749	36°	451035
15 W	3000 K	○	24°	892718	36°	451004
		●	24°	892725	36°	451011
	4000 K	○	24°	892732	36°	451028
		●	24°	892749	36°	451035
		●	24°	892749	36°	451035



1:4

STILLO DUE

LOONARI | 34
recessed – STILLO DUE



 **Lifetime**
30 000 h


 **Beam angle**
24° / 36°

 **CRI**
80

 **Voltage**
220-240 V

 **Protection class**
IP20

Wattage	2 × 8 W		2 × 15 W	
Colour temperature	3000 K	4000 K	3000 K	4000 K
Luminous flux	2 × 620 lm	2 × 650 lm	2 × 1272 lm	2 × 1310 lm
Dimming functionality	none / optional		none / optional	
Mounting hole	200 × 95 mm		280 × 140 mm	
Minimum depth	50 mm		70 mm	
Colour	○ ●		○ ●	

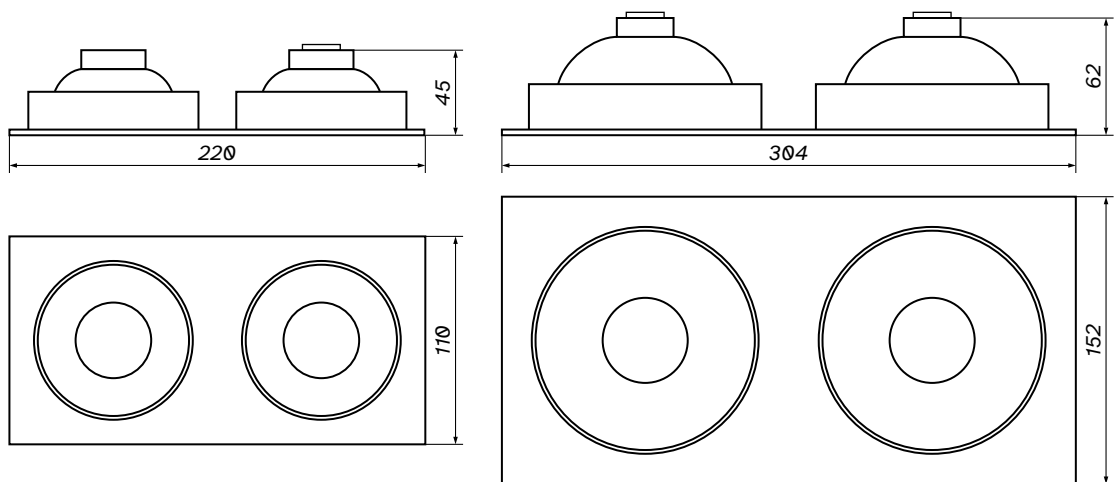


1:4

product code

2×8 W	3000 K	○	24°	892756	36°	451042
		●	24°	892763	36°	451059
	4000 K	○	24°	892770	36°	451066
		●	24°	892787	36°	451073
2×15 W	3000 K	○	24°	892794	36°	451080
		●	24°	892800	36°	451097
	4000 K	○	24°	892817	36°	451103
		●	24°	892824	36°	451110

DELLE RO

LOONARI | 36
recessed – DELLE RO

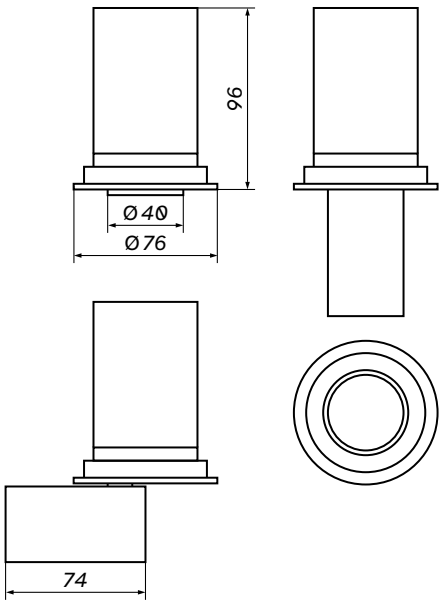

1:4


 Lifetime 30 000 h	 Beam angle 24°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	6 W
Colour temperature	3000 K
Luminous flux	450 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	100 mm
Colour	

product code
 457204

DELLE SQ

LOONARI | 37
recessed – DELLE SQ

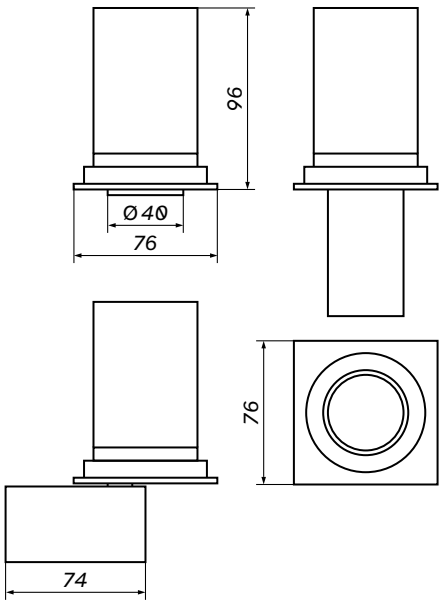

1:4

 Lifetime 30 000 h	 Beam angle 24°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---


Wattage	6 W
Colour temperature	3000 K
Luminous flux	450 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	100 mm
Colour	●

product code
● 457211

DELLE DUE

LOONARI | 38

recessed – DELLE DUE

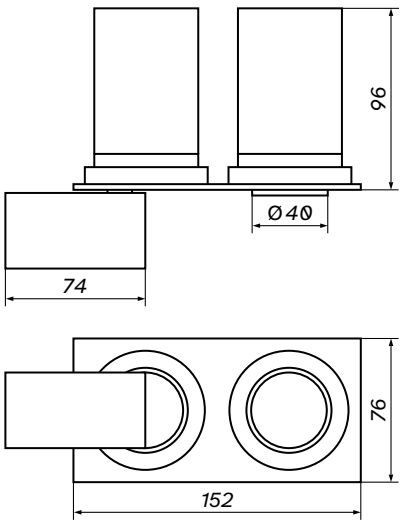



1:4

 Lifetime 30 000 h	 Beam angle 24°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	2 × 6 W
Colour temperature	3000 K
Luminous flux	2 × 450 lm
Dimming functionality	none / optional
Mounting hole	145 × 70 mm
Minimum depth	100 mm
Colour	

product code

 457228

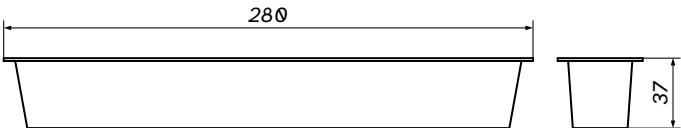

1:4

 Lifetime 30 000 h	 Beam angle 30°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	10 W	20 W
Colour temperature	3000 K 4000 K	3000 K 4000 K
Luminous flux	670 lm 800 lm	1400 lm 1600 lm
Dimming functionality	none / optional	none / optional
Mounting hole	140 × 34 mm	270 × 34 mm
Minimum depth	43 mm	43 mm
Colour	○ ●	○ ●

product code					
10 W	3000 K	○	700440	●	700464
	4000 K	○	700457	●	700471
20 W	3000 K	○	700488	●	700501
	4000 K	○	700495	●	700518

LUGO RC

S / M / L / XL


LOONARI | 40

recessed – LUGO RC



 Lifetime 30 000 h	 Beam angle 24°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	7 W	7 W
Colour temperature	3000 K	4000 K
Luminous flux	675 lm	675 lm
Dimming functionality	none / optional	none / optional
Mounting hole	Ø 50 mm	Ø 50 mm
Minimum depth	40 mm	40 mm
Colour	 	

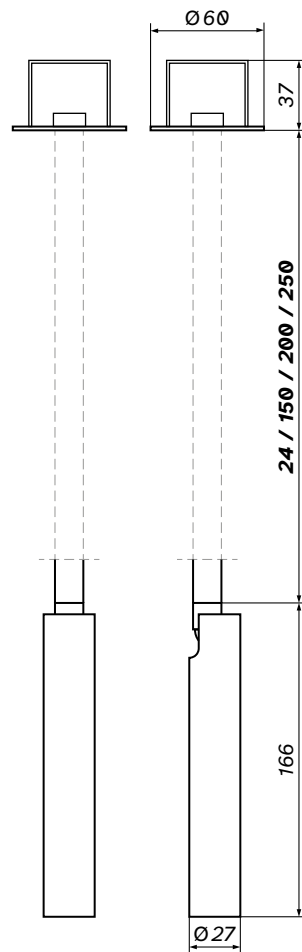



product code

S	3000 K	●	457129	●	458942
	4000 K			●	898130
M	3000 K	●	896099	●	896112
	4000 K			●	898888
L	3000 K	●	896129	●	896143
	4000 K			●	898895
XL	3000 K	●	896150	●	896174
	4000 K			●	898901

1:4

LARSI S


LOONARI | 42
recessed – LARSI S



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 65 mm
Minimum depth	38 mm
Colour	○ ●

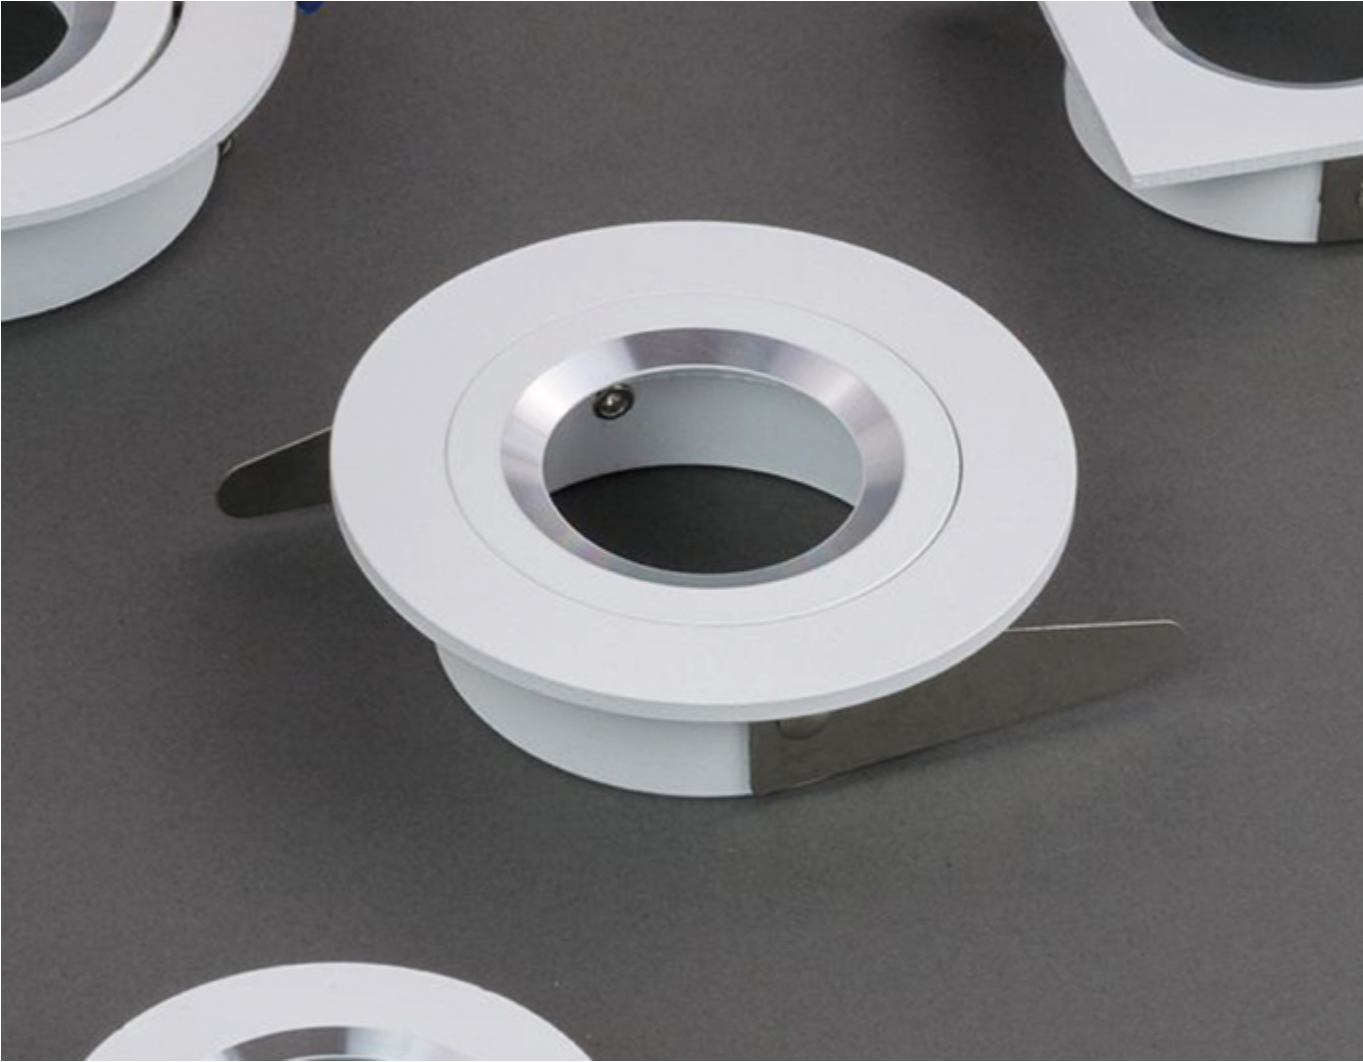


product code

3000 K	○	60°	704820	36°	704820-705278	24°	704820-705261
	●	60°	704837	36°	704837-705278	24°	704837-705261
4000 K	○	60°	704844	36°	704844-705278	24°	704844-705261
	●	60°	704851	36°	704851-705278	24°	704851-705261

LARSI L

LOONARI | 44
recessed – LARSI L



1:4


 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	44 mm
Colour	○ ●

product code							
3000 K	○	60°	704783	36°	704783-705278	24°	704783-705261
	●	60°	704790	36°	704790-705278	24°	704790-705261
4000 K	○	60°	704806	36°	704806-705278	24°	704806-705261
	●	60°	704813	36°	704813-705278	24°	704813-705261

MEZO RO

LOONARI | 46
recessed – MEZO RO



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---


Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	41 mm
Colour	○ ●

product code

3000 K	○	60°	704868	36°	704868-705278	24°	704868-705261
	●	60°	704875	36°	704875-705278	24°	704875-705261
4000 K	○	60°	704882	36°	704882-705278	24°	704882-705261
	●	60°	704899	36°	704899-705278	24°	704899-705261

MEZO RO IP

LOONARI | 48
recessed – MEZO RO IP



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP44
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	43 mm
Colour	○ ●




product code

3000 K	○	60°	705285	36°	705285-705278	24°	705285-705261
	●	60°	705292	36°	705292-705278	24°	705292-705261
4000 K	○	60°	705308	36°	705308-705278	24°	705308-705261
	●	60°	705315	36°	705315-705278	24°	705315-705261

MEZO SQ

LOONARI | 50
recessed – MEZO SQ



1:4


 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	41 mm
Colour	○ ●

product code							
3000 K	○	60°	704905	36°	704905-705278	24°	704905-705261
	●	60°	704912	36°	704912-705278	24°	704912-705261
4000 K	○	60°	704929	36°	704929-705278	24°	704929-705261
	●	60°	704936	36°	704936-705278	24°	704936-705261

MEZO SQ IP

LOONARI | 52
recessed – MEZO SQ IP



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP44
---	--	--	--	---


Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	43 mm
Colour	○ ●

product code

3000 K	○	60°	705322	36°	705322-705278	24°	705322-705261
	●	60°	705339	36°	705339-705278	24°	705339-705261
4000 K	○	60°	705346	36°	705346-705278	24°	705346-705261
	●	60°	705353	36°	705353-705278	24°	705353-705261

MODI RO

LOONARI | 54
recessed – MODI RO



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---


Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 80 mm
Minimum depth	45 mm
Colour	○ ●

product code

3000 K	○	60°	704943	36°	704943-705278	24°	704943-705261
	●	60°	704950	36°	704950-705278	24°	704950-705261
4000 K	○	60°	704967	36°	704967-705278	24°	704967-705261
	●	60°	704974	36°	704974-705278	24°	704974-705261

MODI SQ


LOONARI | 56
recessed – MODI SQ



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 80 mm
Minimum depth	45 mm
Colour	○ ●

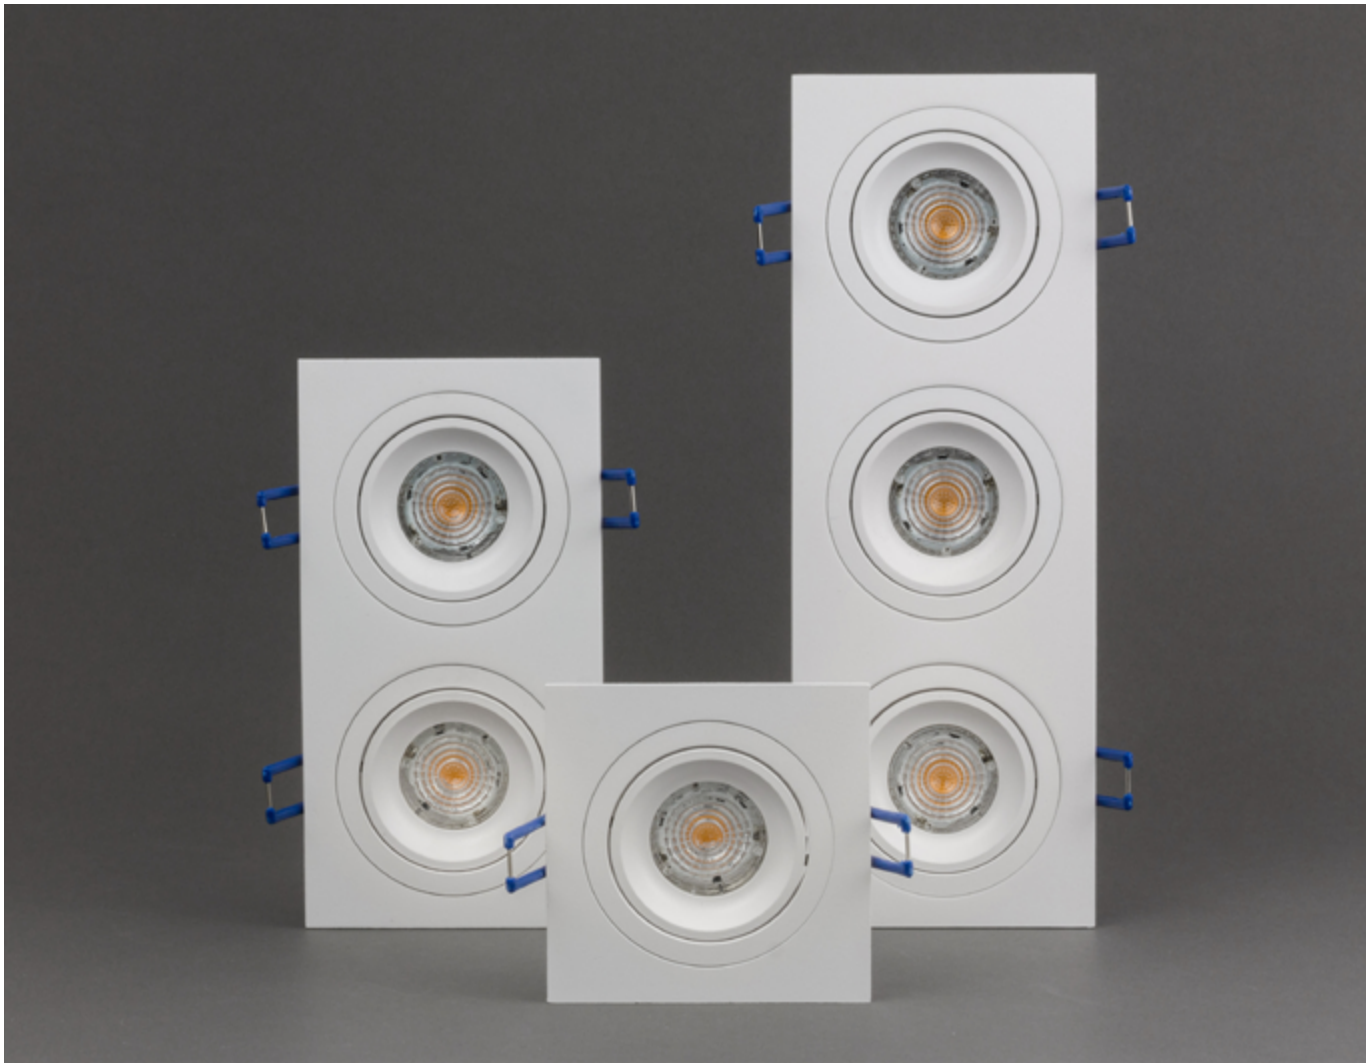

product code

3000 K	○	60°	704981	36°	704981-705278	24°	704981-705261
	●	60°	704998	36°	704998-705278	24°	704998-705261
4000 K	○	60°	705001	36°	705001-705278	24°	705001-705261
	●	60°	705018	36°	705018-705278	24°	705018-705261


MODI SQ DUE

LOONARI | 58
recessed – MODI SQ DUE



 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	2 × 8 W
Colour temperature	3000 K 4000 K
Luminous flux	2 × 965 lm 2 × 975 lm
Dimming functionality	none / optional
Mounting hole	165 × 80 mm
Minimum depth	45 mm
Colour	○ ●

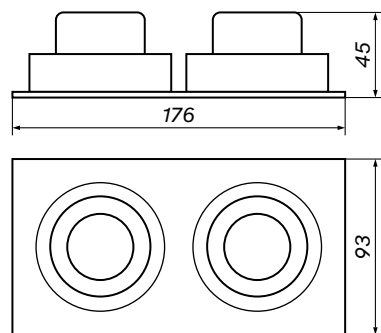

1:4

product code

3000 K	○	60°	705025	36°	705025-705278	24°	705025-705261
	●	60°	705032	36°	705032-705278	24°	705032-705261
4000 K	○	60°	705049	36°	705049-705278	24°	705049-705261
	●	60°	705056	36°	705056-705278	24°	705056-705261


MODI SQ TRE

LOONARI | 60
recessed – MODI SQ TRE



 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	3 × 8 W
Colour temperature	3000 K 4000 K
Luminous flux	3 × 965 lm 3 × 975 lm
Dimming functionality	none / optional
Mounting hole	245 × 80 mm
Minimum depth	45 mm
Colour	○ ●

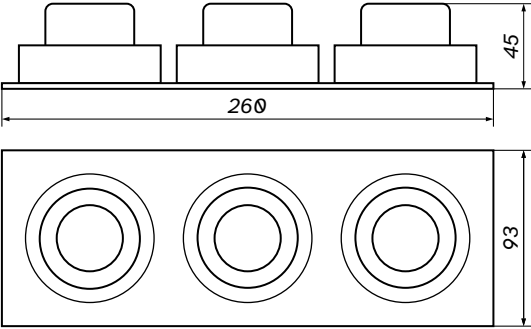



1:4

product code

3000 K	○	60°	705063	36°	705063-705278	24°	705063-705261
	●	60°	705070	36°	705070-705278	24°	705070-705261
4000 K	○	60°	705087	36°	705087-705278	24°	705087-705261
	●	60°	705094	36°	705094-705278	24°	705094-705261

PERO RO

LOONARI | 62
recessed - PERO RO



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---



Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	64 mm
Colour	○ ●

product code

3000 K	○	60°	705100	36°	705100-705278	24°	705100-705261
	●	60°	705117	36°	705117-705278	24°	705117-705261
4000 K	○	60°	705124	36°	705124-705278	24°	705124-705261
	●	60°	705131	36°	705131-705278	24°	705131-705261

PERO RO IP

LOONARI | 64
recessed - PERO RO IP



1:4



 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP44
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	66 mm
Colour	○ ●

product code							
3000 K	○	60°	705360	36°	705360-705278	24°	705360-705261
	●	60°	705377	36°	705377-705278	24°	705377-705261
4000 K	○	60°	705384	36°	705384-705278	24°	705384-705261
	●	60°	705391	36°	705391-705278	24°	705391-705261

PERO SQ

LOONARI | 66
recessed - PERO SQ



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	64 mm
Colour	○ ●





product code

3000 K	○	60°	705148	36°	705148-705278	24°	705148-705261
	●	60°	705155	36°	705155-705278	24°	705155-705261
4000 K	○	60°	705162	36°	705162-705278	24°	705162-705261
	●	60°	705179	36°	705179-705278	24°	705179-705261

PERO SQ IP

LOONARI | 68
recessed – PERO SQ IP



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP44
---	--	--	--	---


Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	66 mm
Colour	○ ●

product code

3000 K	○	60°	705407	36°	705407-705278	24°	705407-705261
	●	60°	705414	36°	705414-705278	24°	705414-705261
4000 K	○	60°	705421	36°	705421-705278	24°	705421-705261
	●	60°	705438	36°	705438-705278	24°	705438-705261

PRADI SQ

LOONARI | 70
recessed – PRADI SQ



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---


Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 54 mm
Minimum depth	65 mm
Colour	○ ●

product code

3000 K	○	60°	705483	36°	705483-705278	24°	705483-705261
	●	60°	705490	36°	705490-705278	24°	705490-705261
4000 K	○	60°	705506	36°	705506-705278	24°	705506-705261
	●	60°	705513	36°	705513-705278	24°	705513-705261

QUBO RO

LOONARI | 72
recessed – QUBO RO



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	45 mm
Colour	○ ●





product code

3000 K	○	60°	705186	36°	705186-705278	24°	705186-705261
	●	60°	705193	36°	705193-705278	24°	705193-705261
4000 K	○	60°	705209	36°	705209-705278	24°	705209-705261
	●	60°	705216	36°	705216-705278	24°	705216-705261

QUBO SQ

LOONARI | 74
recessed – QUBO SQ

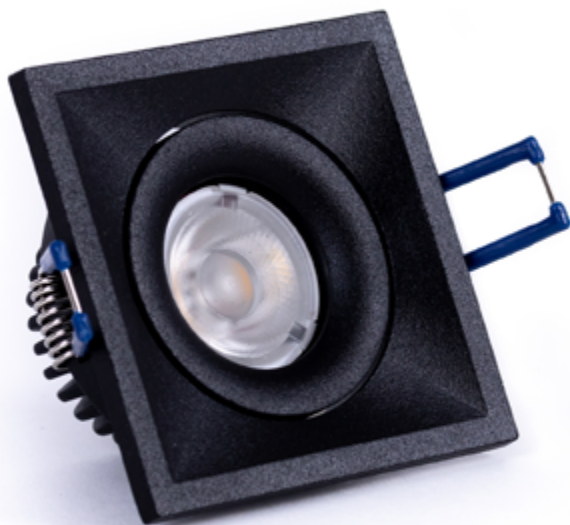

1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	45 mm
Colour	○ ●




product code

3000 K	○	60°	705223	36°	705223-705278	24°	705223-705261
	●	60°	705230	36°	705230-705278	24°	705230-705261
4000 K	○	60°	705247	36°	705247-705278	24°	705247-705261
	●	60°	705254	36°	705254-705278	24°	705254-705261

TERI RO

LOONARI | 76
recessed – TERI RO



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	70 mm
Colour	○ ●




product code

3000 K	○	60°	705520	36°	705520-705278	24°	705520-705261
	●	60°	705537	36°	705537-705278	24°	705537-705261
4000 K	○	60°	705544	36°	705544-705278	24°	705544-705261
	●	60°	705551	36°	705551-705278	24°	705551-705261

TERI SQ

LOONARI | 78
recessed – TERI SQ



1:4

 Lifetime 50 000 h	 Beam angle 24° / 36° / 60°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K 4000 K
Luminous flux	965 lm 975 lm
Dimming functionality	none / optional
Mounting hole	Ø 70 mm
Minimum depth	70 mm
Colour	○ ●


product code

3000 K	○	60°	705568	36°	705568-705278	24°	705568-705261
	●	60°	705575	36°	705575-705278	24°	705575-705261
4000 K	○	60°	705582	36°	705582-705278	24°	705582-705261
	●	60°	705599	36°	705599-705278	24°	705599-705261



CROSTI LACCE RC

LOONARI | 81
recessed – CROSTI LACCE RC



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light socket GU10
Mounting hole Ø 50 mm
Minimum depth 40 mm
Colour ○ ●

product code


○ 894989
● 894996

CROSTI LACCE RC SLIM

S / M / L / XL

LOONARI | 82

recessed – CROSTI LACCE RC SLIM

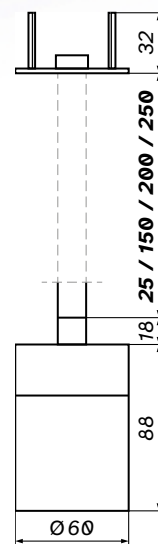

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light socket GU10
Mounting hole Ø 50 mm
Minimum depth 40 mm
Colour 

product code

S  700686




M  700693

L  700709

XL  700716

CROSTI LANA RO S

LOONARI | 83
recessed – CROSTI LANA RO S

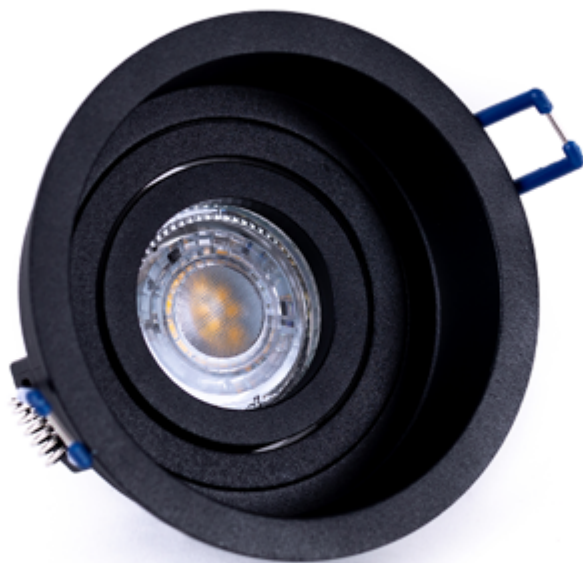

1:4

 Voltage
220-240 V

 Protection class
IP20



Maximum wattage **50 W**
Light socket **GU10** / optional GU5,3
Mounting hole **Ø 95 mm**
Minimum depth **100 mm**
Colour ○ ●

product code

○ 459215
● 459222

CROSTI LAPILO RC

LOONARI | 84
recessed – CROSTI LAPILO RC



1:4

 Voltage
220-240 V

 Protection class
IP20


Maximum wattage 50 W
Light socket GU10
Mounting hole Ø 60 mm
Minimum depth 110 mm
Colour ○ ● ●

product code

○ 456740
● 456757
● 456764

CROSTI LARSI S

LOONARI | 85
recessed – CROSTI LARSI S



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**
Light socket **GU10** / optional GU5,3
Mounting hole **Ø 65 mm**
Minimum depth **72 mm**
Colour ○ ●



product code

○ 453343
● 453350

CROSTI LARSI L

LOONARI | 86

recessed – CROSTI LARSI L



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional GU5,3

Mounting hole **Ø 69 mm**

Minimum depth **72 mm**

Colour ○ ●

product code



○ 453329

● 453336

CROSTI MODI RO

IONARI | 87

recessed - CROSTI MODI RO



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light socket **GU10** / optional GU5,3
Mounting hole Ø 80 mm
Minimum depth 72 mm
Colour ○ ●

product code


○ 453367

● 453374

CROSTI MODI SQ

LOONARI | 88

recessed - CROSTI MODI SQ



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light socket **GU10** / optional GU5,3
Mounting hole Ø 80 mm
Minimum depth 72 mm
Colour ○ ●

product code


○ 453381

● 453398

CROSTI MODI SQ DUE

LOONARI | 89

recessed - CROSTI MODI SQ DUE

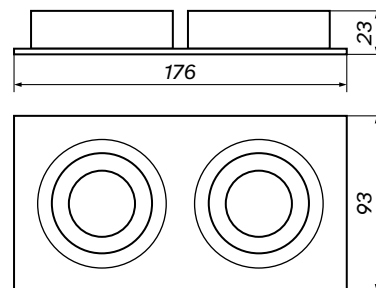

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional GU5,3

Mounting hole **165 × 80 mm**

Minimum depth **73 mm**

Colour ○ ●


product code

○ 453404

● 453411

CROSTI MODI SQ TRE

LOONARI | 90
recessed – CROSTI MODI TRE

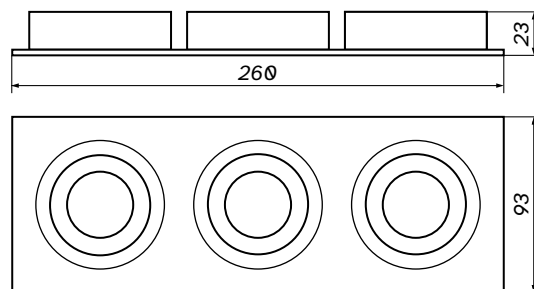

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light socket **GU10** / optional GU5,3
Mounting hole 245 × 79 mm
Minimum depth 73 mm
Colour ○ ●



product code

○ 453428

● 453435

CROSTI ORRIS

LOONARI | 91
recessed – CROSTI ORRIS



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light socket **GU10** / optional GU5,3
Mounting hole Ø 69 mm
Minimum depth 73 mm
Colour ○ ●

product code



○ 459260

● 459277

CROSTI PERO RO

LOONARI | 92

recessed – CROSTI PERO RO



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional GU5,3

Mounting hole **Ø 70 mm**

Minimum depth **90 mm**

Colour ○ ●

product code


○ 453206

● 453213

CROSTI PERO SQ

LOONARI | 93

recessed – CROSTI PERO SQ



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket **GU10** / optional GU5,3

Mounting hole Ø 70 mm

Minimum depth 90 mm

Colour ○ ●

product code


○ 453220

● 453237

CROSTI PERO RO RT

LOONARI | 94

recessed - CROSTI PERO RO RT



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional GU5,3

Mounting hole **Ø 90 mm**


Minimum depth **95 mm**

Colour ○ ●

product code

○ 701812



● 701829

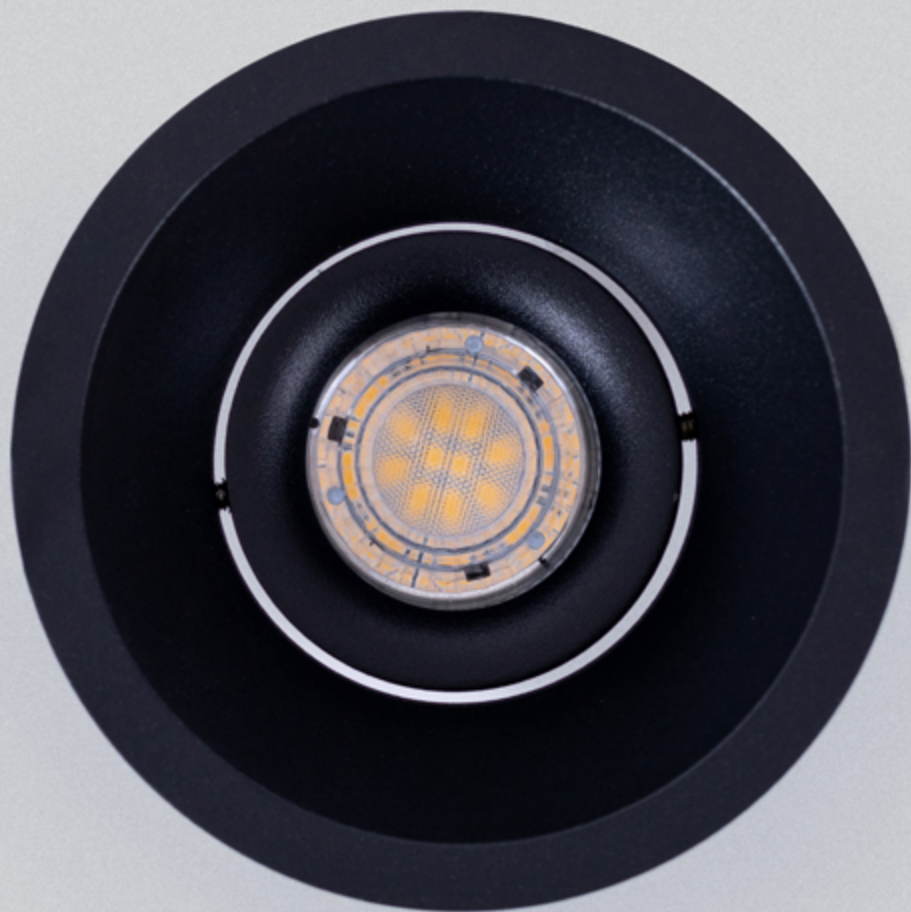

CROSTI QUBO RO

LOONARI | 96

recessed – CROSTI QUBO RO



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional GU5,3

Mounting hole **Ø 70 mm**

Minimum depth **75 mm**

Colour ○ ●


product code

○ 453305

● 453312

CROSTI QUBO SQ

LOONARI | 97
recessed – CROSTI QUBO SQ



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light socket **GU10** / optional GU5,3
Mounting hole Ø 69 mm
Minimum depth 80 mm
Colour ○ ●



product code

○ 453282
● 453299

CROSTI TERI RO

LOONARI | 98

recessed – CROSTI TERI RO



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket **GU10** / optional GU5,3

Mounting hole Ø 70 mm

Minimum depth 70 mm

Colour ○ ●

product code


○ 453169

● 453176

CROSTI TERI SQ

LOONARI | 99

recessed – CROSTI TERI SQ



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket **GU10** / optional GU5,3

Mounting hole Ø 70 mm

Minimum depth 70 mm

Colour ○ ●

product code


○ 453183

● 453190



CROSTI VIEDO

LOONARI | 101
recessed - CROSTI VIEDO



1:4

 Voltage
220-240 V

 Protection class
IP20



Maximum wattage **50 W**
Light socket **GU10** / optional GU5,3
Mounting hole **100 × 100 mm**
Minimum depth **90 mm**
Colour ○ ●

product code

○ 459192
● 459208

CROSTI GAVI

LOONARI | 102
recessed – CROSTI GAVI

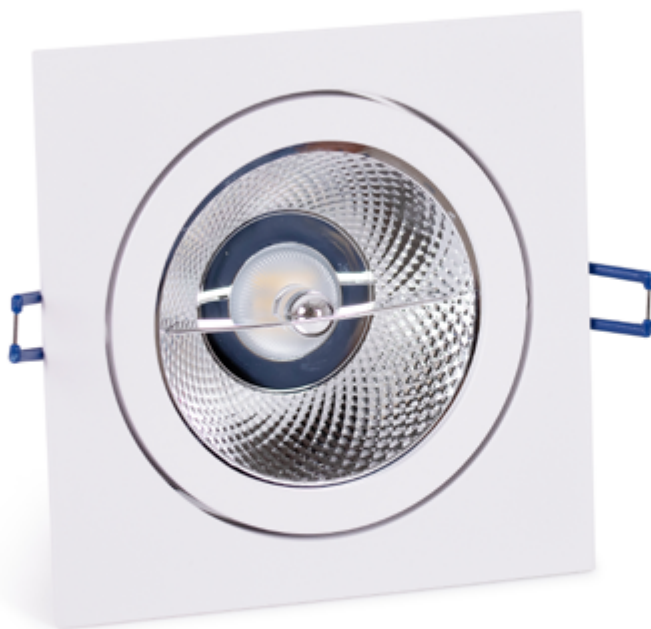

1:6

 Voltage
220-240 V / 12 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional G53

Mounting hole **Ø 135 mm**

Minimum depth **65 mm**

Colour ☐ ☒


product code

☐ 453442

☒ 453459

CROSTI GAVI DUE

LOONARI | 103
recessed – CROSTI GAVI DUE

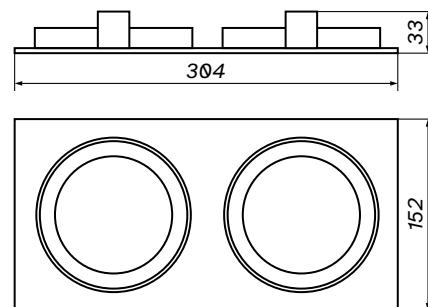

1:6

⚡ Voltage
220-240 V / 12 V

🛡️ Protection class
IP20

Maximum wattage **50 W**
Light socket **GU10** / optional G53
Mounting hole **273 × 135 mm**
Minimum depth **65 mm**
Colour ○ ●



product code

○ 453466
● 453473



CROSTI LANA RO L

LOONARI | 105
recessed - CROSTI LANA RO L



1:6

 Voltage
220-240 V / 12 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional G53

Mounting hole **Ø 155 mm**

Minimum depth **110 mm**

Colour ○ ●


product code

○ 459239

● 893135

CROSTI LANA SQ L

LOONARI | 106
recessed – CROSTI LANA SQ L

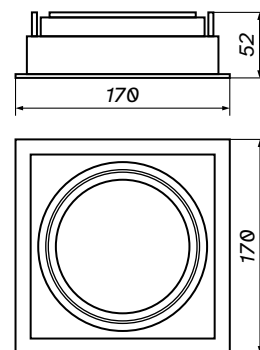

1:6

 Voltage
220-240 V / 12 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional G53

Mounting hole **155 x 155 mm**

Minimum depth **110 mm**

Colour ○ ●


product code

○ 459246

● 893142

CROSTI LANA SQ DUE

LOONARI | 107
recessed - CROSTI LANA SQ DUE

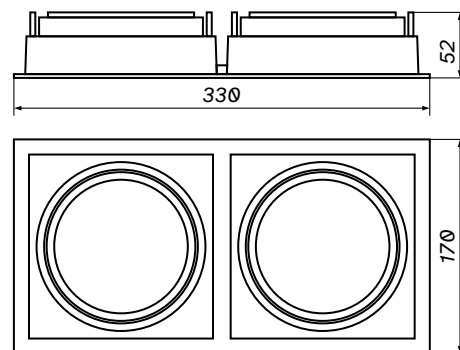

1:6

 Voltage
220-240 V / 12 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10** / optional G53

Mounting hole 316 x 155 mm

Minimum depth 110 mm

Colour ○ ●

product code

○ 459253

● 893159

