


**Surface
Mounted**

HOME & DECOR
by LOONARI



LOONARI

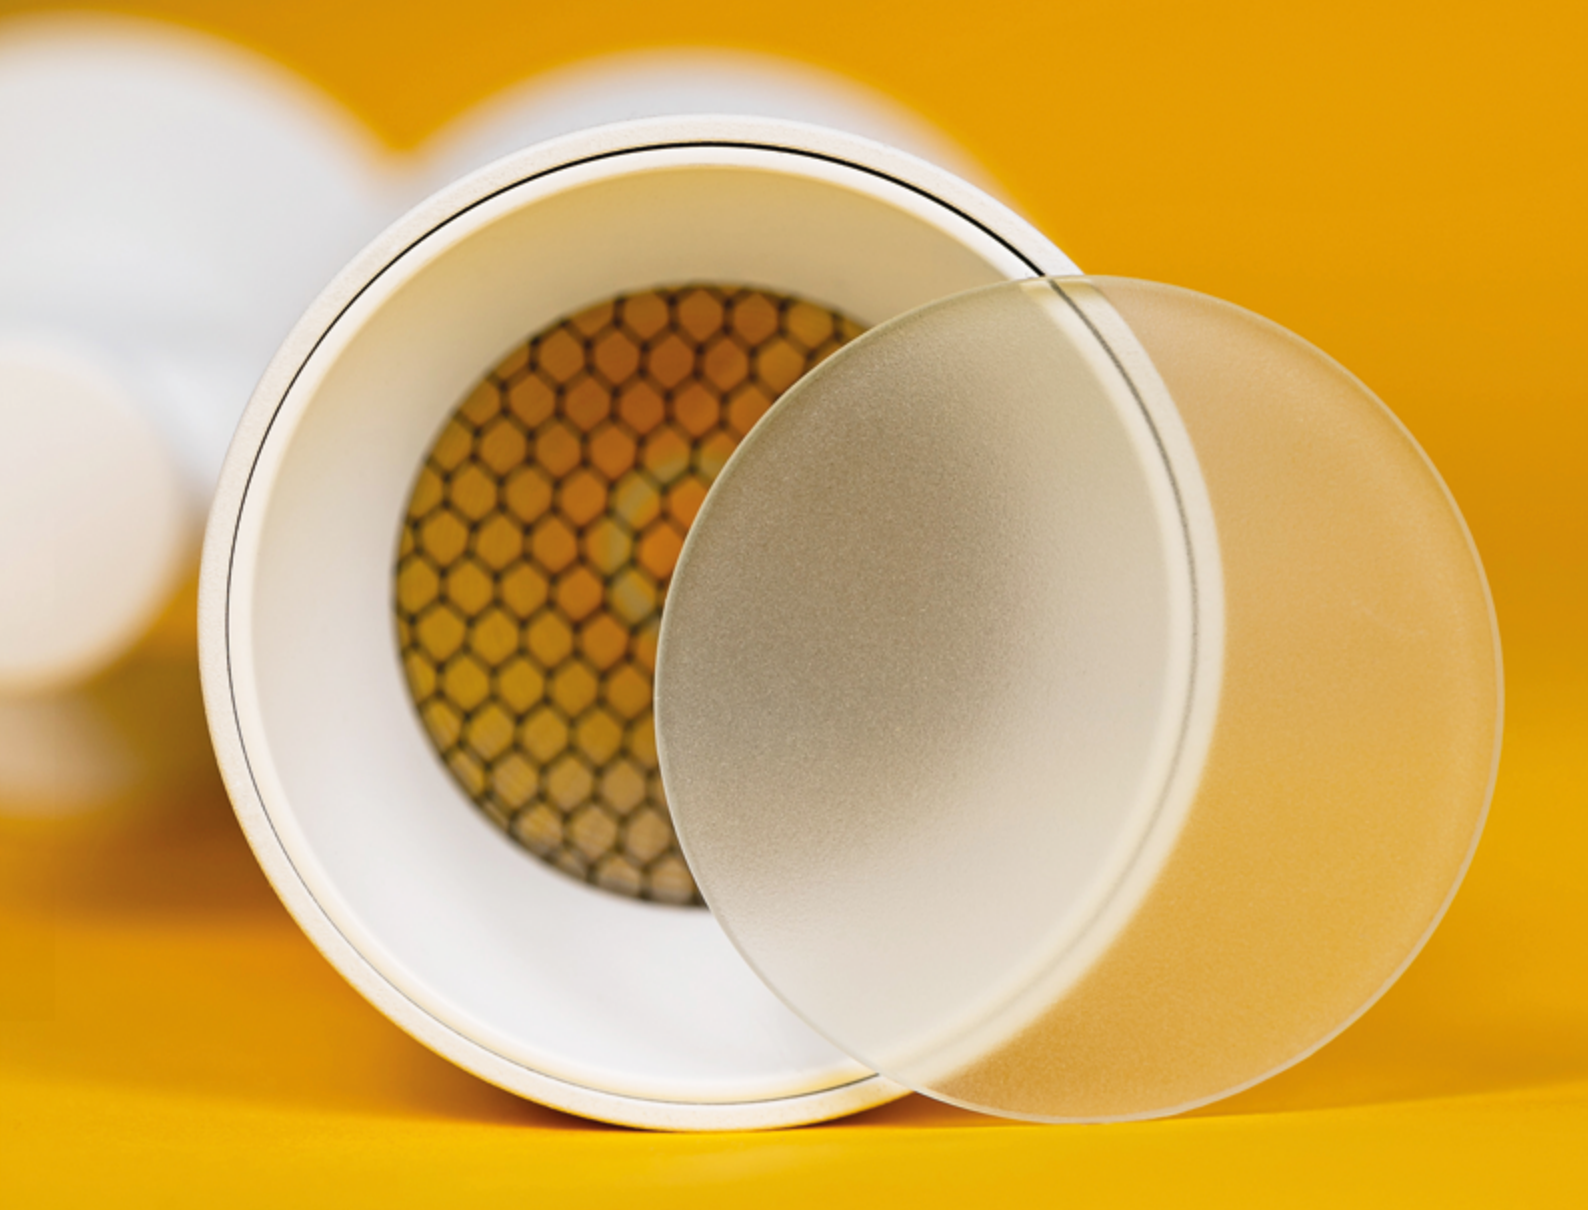

SURFACE MOUNTED



← JOIN US ON INSTAGRAM

Catalog current status: **October, 2024**

All measurements and technical data given in the catalogue are informational only. Due to the production process actual parameters of the products may slightly differ from information provided in the catalogue.

The most up-to-date data and actual technical information can be found on product cards, manuals or our website: **loonari.eu**

LOONARI sp. z o.o. reserves the right to amend presented materials and technical parameters without prior notice.

LOONARI sp. z o.o. is not liable for any printing mistake. All images in the catalogue are protected with authors' rights. Products and colours presented in the pictures are illustrative and may visually differ from actual products.

LOONARI mark has been registered at the EUIPO.

GET IN CONTACT

We're more than just a lamp provider – we're your partner in creating the perfect lighting. Starting with lighting design and continuing through the selection of the right products and control system, we will support you throughout the system set up and commissioning process.

If needed, you can count on our post-warranty service too. Tell us about your project: **hello@loonari.eu**

DISTRIBUTION



LOONARI sp. z o.o.
Podmiejska 7
Piekary Śląskie
PL41940, Poland
+48 539 982 819

CONTENTS PAGE

SURFACE MOUNTED

Basaro RO IP	20	Crosti Lapilo SQ SM	37	Crosti Lacce SQ Slim	53
Basaro SQ IP	21	Crosti Luce	38	Crosti Lacce SQ Due Slim	54
Bivio	22	Crosti Luce IP	39	Crosti Lacce SQ Tre Slim	55
Bivio Due	23	Crosti Pero RO SM	40		
Ferte SM	24	Crosti Pero SQ SM	41		
Lapilo RO SM	25	Crosti Canna	42		
Lapilo SQ SM	26	Crosti Canna Due	43		
Leini	28	Crosti Daime	45		
Lucena SM	30	Crosti Lacce RO	46		
Punto	31	Crosti Lacce SQ	47		
Punto Due	32	Crosti Lacce SQ Due	48		
Punto Quatro	33	Crosti Lacce SQ Tre	49		
Senise RO	34	Crosti Lacce RO Tre	50		
Senise SQ	35	Crosti Lacce SQ Quatro	51		
Crosti Lapilo RO SM	36	Crosti Lacce RO Slim	52		



photograph – **Marcin Grabowiecki** / realisation – **Maja Dembowska-Pisarek** dembowska.com.pl / stylist – **Eliza Mrozińska**









photograph – **Adam Grzesik** / project – **Maja Dembowska-Pisarek** dembowska.com.pl, **Katarzyna Jagiełło-Wróbel** JAG studio






project - Ewelina Jończyk REWEL studio









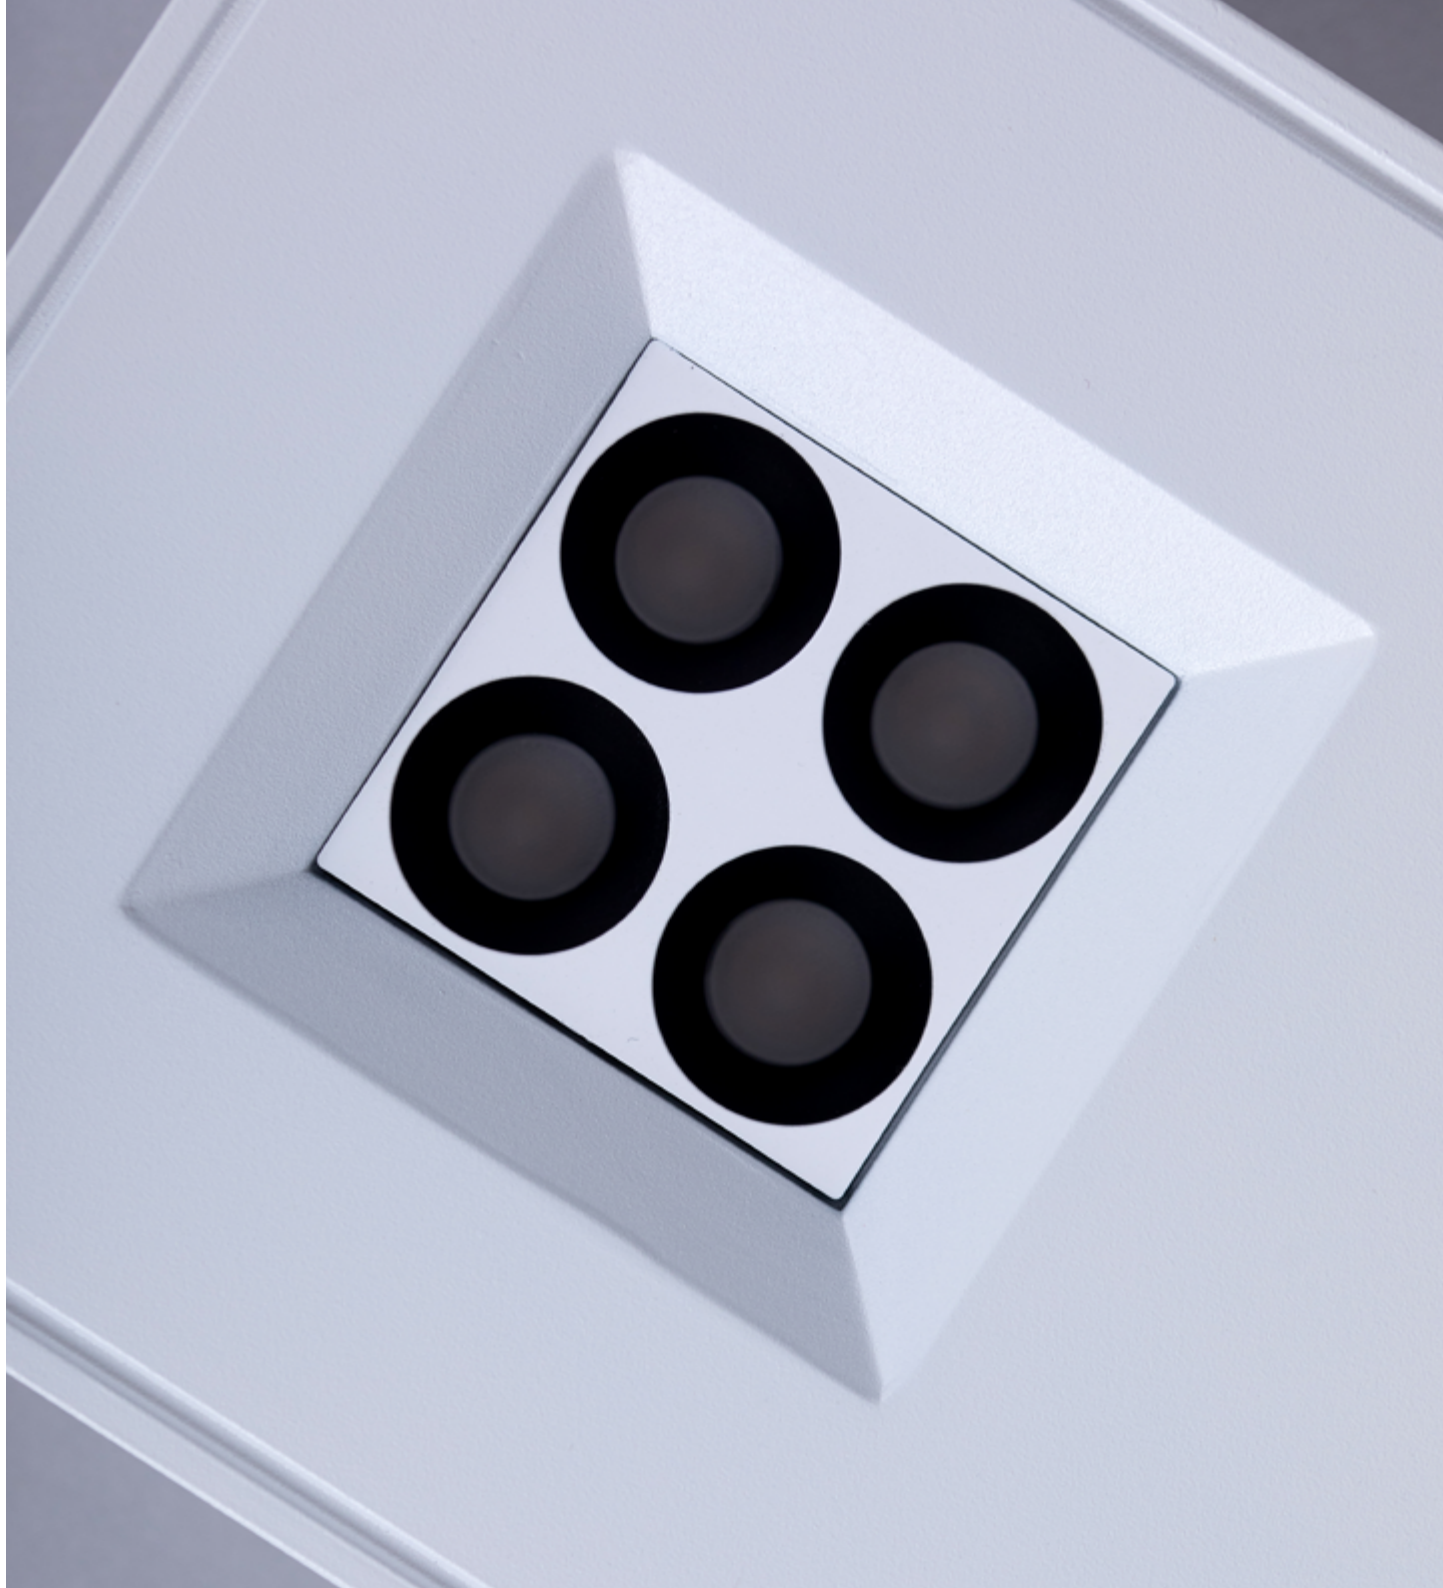







BASARO RO IP

LOONARI | 20

surface mounted - BASARO RO IP



1:4

 Lifetime
50 000 h

 Beam angle
36°

 CRI
90

 Voltage
220-240 V

 Protection class
IP65

Wattage 8,9 W

Colour temperature 3000 K / 4000 K

Luminous flux 946 lm

Dimming functionality none

Colour ☐ ☒

product code


3000 K ☐ 456856 ☒ 456863

4000 K ☐ 704721 ☒ 704738

BASARO SQ IP

LOONARI | 21

surface mounted – BASARO SQ IP

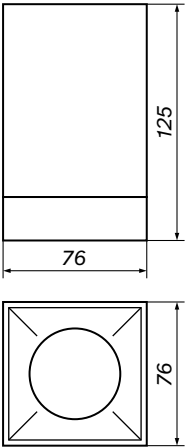

1:4

 Lifetime
50 000 h

 Beam angle
36°

 CRI
90

 Voltage
220-240 V

 Protection class
IP65

Wattage 8,9 W

Colour temperature 3000 K / 4000 K

Luminous flux 946 lm

Dimming functionality none

Colour ☐ ☒

product code


3000 K ☐ 456887 ☒ 456894

4000 K ☐ 893012 ☒ 893029

BIVIO

LOONARI | 22

surface mounted – BIVIO

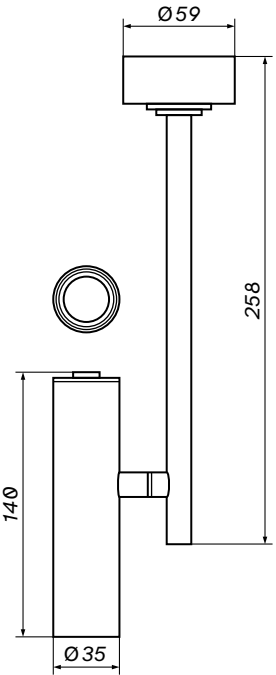

1:4

Combine with:

Decorative ring ☐ 701577

 Lifetime
50 000 h

 Beam angle
36°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage **8 W**

Colour temperature **3000 K / 4000 K**

Luminous flux **480 lm**

Dimming functionality **none**

Colour ☐ ☒

product code

3000 K ☐ 701492 ☒ 701508

4000 K ☐ 701515 ☒ 701522

BIVIO DUE


LOONARI | 23

surface mounted – BIVIO DUE



Combine with:

Decorative ring ☐ 701577

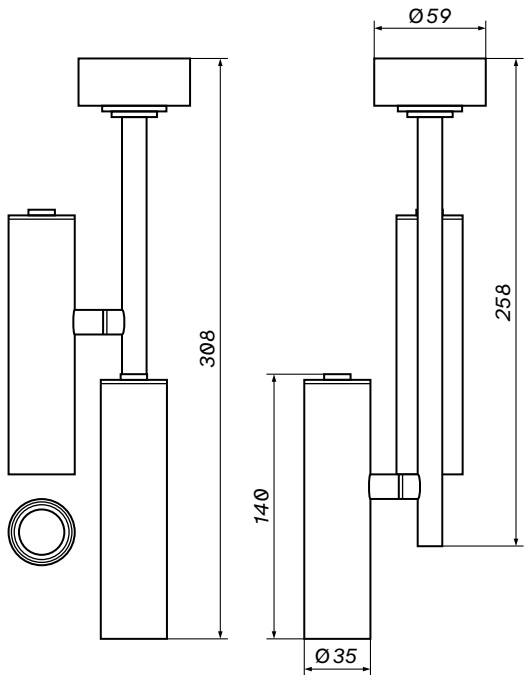

1:4

 Lifetime
50 000 h

 Beam angle
36°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage **2 × 8 W**
Colour temperature **3000 K / 4000 K**
Luminous flux **2 × 480 lm**
Dimming functionality **none**
Colour ☐ ☒


product code

3000 K	☐	701539	☒	701546
4000 K	☐	701553	☒	701560

FERTE SM

LOONARI | 24

surface mounted – FERTE SM

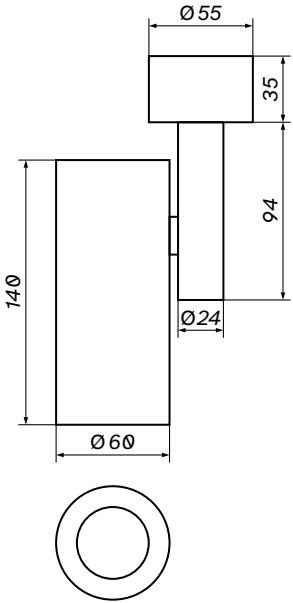

1:4

 Lifetime
30 000 h

 Beam angle
38°

 CRI
80

 Voltage
220-240 V

 Protection class
IP20

Wattage 10 W

Colour temperature 3000 K / 4000 K

Luminous flux 750 lm

Dimming functionality none

Colour ☐ ☒



product code

3000 K	☐	894941	☒	894965
4000 K	☐	894958	☒	894972

LAPILO RO SM

LOONARI | 25

surface mounted - LAPILO RO SM



1:4

 Lifetime
30 000 h

 Beam angle
40°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 8 W

Colour temperature 3000 K

Luminous flux 660 lm

Dimming functionality PC

Colour    

product code

 4 56771

 4 56788



 4 58256

 4 58263

LAPILO SQ SM

LOONARI | 26

surface mounted - LAPILO SQ SM



1:4

 Lifetime
30 000 h

 Beam angle
40°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage
Colour temperature
Luminous flux
Dimming functionality
Colour

8 W
3000 K
660 lm
PC



product code

 456818
 456825
 458232
 458249





 Lifetime 30 000 h	 Beam angle 45°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
	S	M	L	XL
Wattage	4 W	10 W	20 W	30 W
Colour temperature	3000 K / 4000 K	3000 K / 4000 K	3000 K / 4000 K	3000 K / 4000 K
Luminous flux	300 lm	800 lm	1600 lm	2400 lm
Dimming functionality	none	none	none	none
Colour	☐ ☒	☐ ☒	☐ ☒	☐ ☒

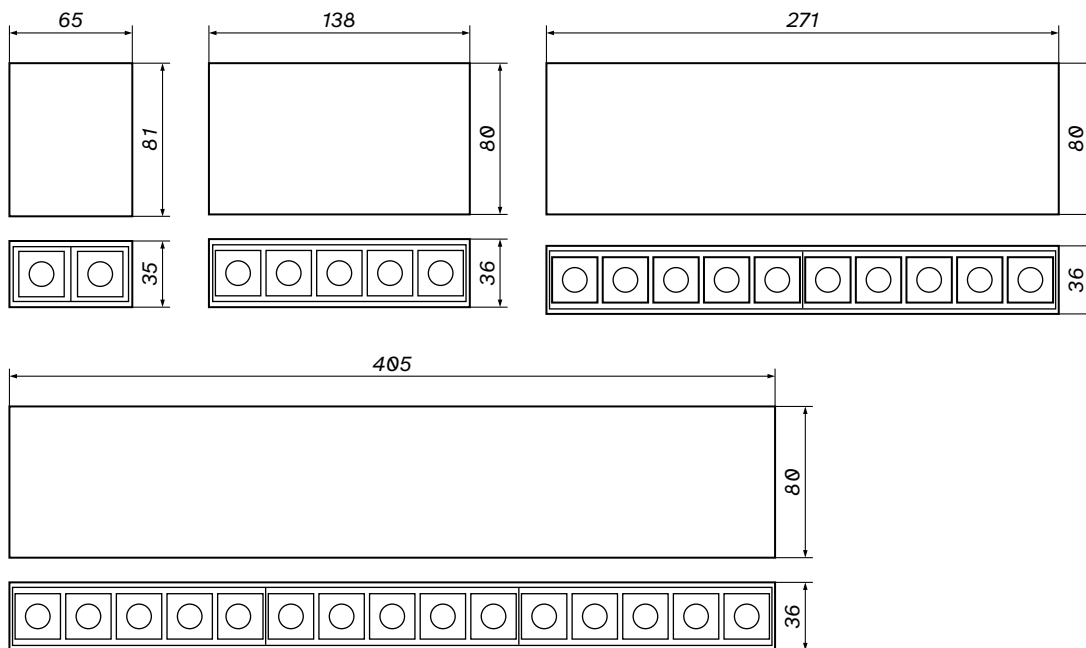

1:4


product code

S	3000 K	○	701058	●	701065
	4000 K	○	701072	●	701089
M	3000 K	○	701096	●	701102
	4000 K	○	701119	●	701126
L	3000 K	○	701133	●	701140
	4000 K	○	701157	●	701164
XL	3000 K	○	701171	●	701188
	4000 K	○	701195	●	701201

LUCENA SM

LOONARI | 30

surface mounted – LUCENA SM

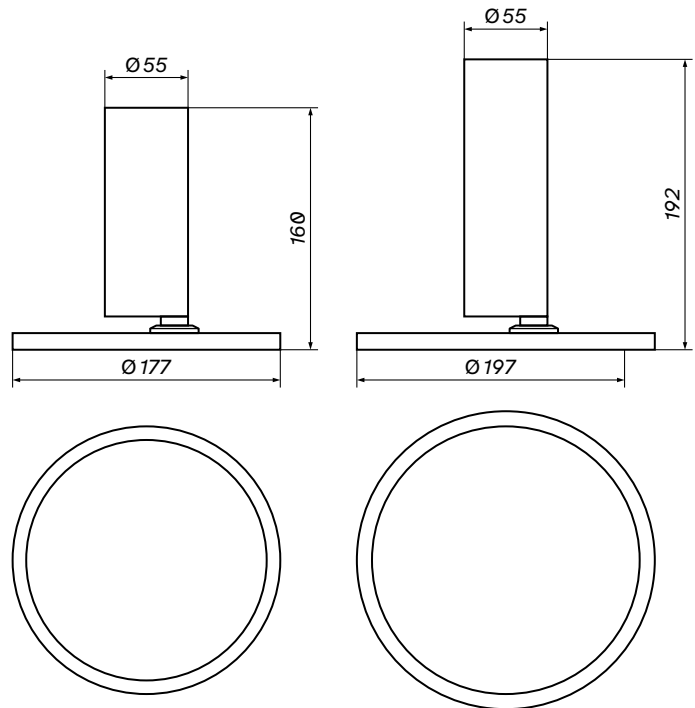

1:5

 Lifetime 30 000 h	 Beam angle 120°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	---	--	--	---


Wattage	12 W	18 W
Colour temperature	3000 K / 4000 K	4000 K
Luminous flux	866 lm	1570 lm
Dimming functionality	none	none
Colour	☐ ☒	☐ ☒

product code					
12 W	3000 K	☐	894804	☒	894811
	4000 K	☐	894828	☒	894835
18 W	4000 K	☐	894842	☒	894859

PUNTO

LOONARI | 31

surface mounted - PUNTO



1:4

 Lifetime
30 000 h

 Beam angle
40°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20



Wattage 8 W
Colour temperature 3000 K / 4000 K
Luminous flux 560 lm
Dimming functionality none
Colour ☐ ☒

product code
3000 K ☐ 701218 ☒ 701225
4000 K ☐ 701232 ☒ 701249

PUNTO DUE

LOONARI | 32

surface mounted – PUNTO DUE

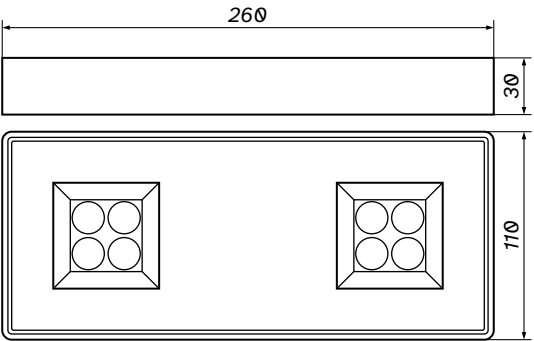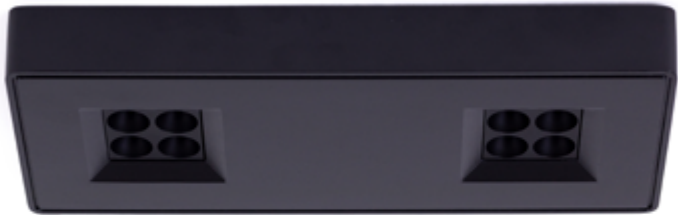

1:4

 Lifetime 30 000 h	 Beam angle 40°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---


Wattage	16 W
Colour temperature	3000 K / 4000 K
Luminous flux	1120 lm
Dimming functionality	none
Colour	☐ ☒

product code			
3000 K	☐	701256	☒ 701263
4000 K	☐	701270	☒ 701287

PUNTO QUATRO

LOONARI | 33

surface mounted - PUNTO QUATRO

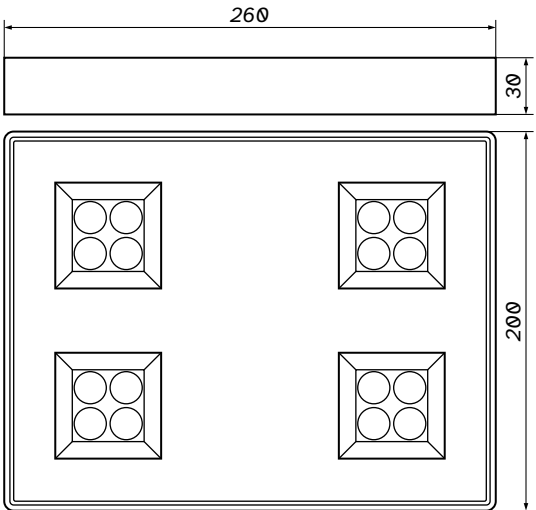

1:4

 Lifetime
30 000 h

 Beam angle
40°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 32 W

Colour temperature 3000 K / 4000 K

Luminous flux 2240 lm

Dimming functionality none

Colour ☐ ☒

product code



3000 K ☐ 701294 ☒ 701300

4000 K ☐ 701317 ☒ 701324

SENISE RO

LOONARI | 34

surface mounted – SENISE RO



1:4

 Lifetime
30 000 h

 Beam angle
36°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 11,4 W

Colour temperature 3000 K

Luminous flux 1288 lm

Dimming functionality none / optional

Colour ☐ ☒


product code

☐ 456672

☒ 456689

SENISE SQ

LOONARI | 35
surface mounted – SENISE SQ

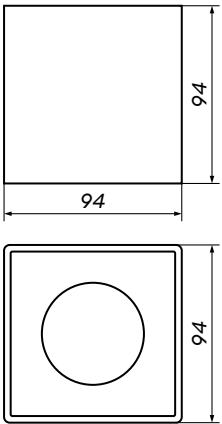

1:4

 Lifetime
30 000 h

 Beam angle
36°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 11,4 W

Colour temperature 3000 K

Luminous flux 1288 lm

Dimming functionality none / optional

Colour ☐ ☒

product code



☐ 456696

☒ 456702

CROSTI LAPILO RO SM

LOONARI | 36

surface mounted – CROSTI LAPILO RO SM



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket GU10

Colour    

product code

 456795



 456801

 458218

 458225

CROSTI LAPILO SQ SM

LOONARI | 37
surface mounted – CROSTI LAPILO SQ SM



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour    

product code

 456832

 456849



 458195

 458201

CROSTI LUCE

LOONARI | 38

surface mounted – CROSTI LUCE



1:4

Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories (honeycomb lens / linear lens / softening lens)

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ☐ ☒

product code



☐ 459345

☒ 459352

CROSTI LUCE IP

LOONARI | 39

surface mounted – CROSTI LUCE IP



1:4

 Voltage
220-240 V

 Protection class
IP44

Maximum wattage 50 W

Light socket GU10

Colour ☐ ☒

product code



☐ 459369

☒ 459376

CROSTI PERO RO SM

LOONARI | 40

surface mounted – CROSTI PERO RO SM



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket GU10

Colour ☐ ☒

product code



☐ 459130

☒ 459147

CROSTI PERO SQ SM

LOONARI | 41

surface mounted – CROSTI PERO SQ SM



1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ☐ ☒

product code

☐ 459154


☒ 459161

CROSTI CANNA

S / L

LOONARI | 42

surface mounted – CROSTI CANNA

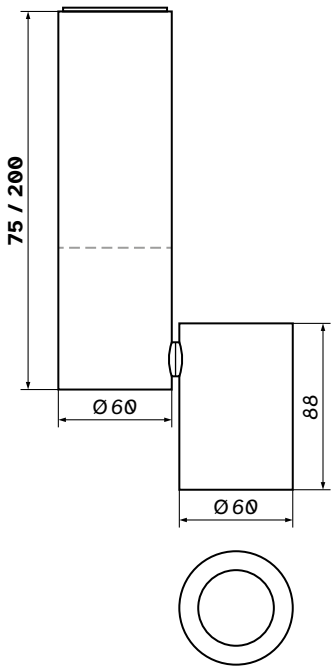

1:4

 Voltage
220-240 V

 Protection class
IP20

	S	L
Maximum wattage	50 W	50 W
Light socket	GU10	GU10
Colour	☐ ☒	☒


product code

S	☐	453862
	☒	453879
L	☒	453886

CROSTI CANNA DUE

LOONARI | 43

surface mounted – CROSTI CANNA DUE

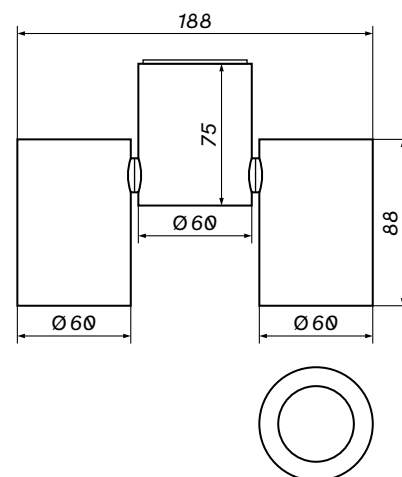

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ☐ ☒

product code

☐ 453893


☒ 453909



CROSTI DAIME

LOONARI | 45

surface mounted – CROSTI DAIME

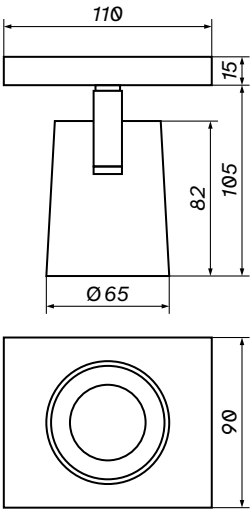

1:4

Combine with:

Decorative ring ☐ ☒ ☐

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ☐ ☒

product code



☐ 455330

☒ 455347

CROSTI LACCE RO

LOONARI | 46

surface mounted – CROSTI LACCE RO



1:4

Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket GU10

Colour ○ ●

product code

○ 455439

● 455446

CROSTI LACCE SQ

LOONARI | 47

surface mounted – CROSTI LACCE SQ




Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)

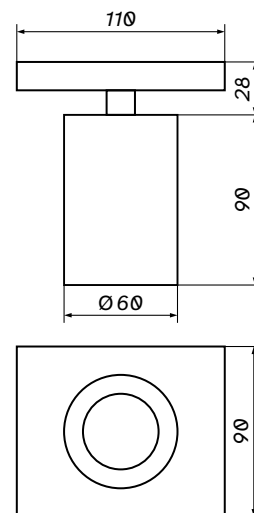

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ○ ●

product code


○ 455354

● 455361

CROSTI LACCE SQ DUE

LOONARI | 48

surface mounted – CROSTI LACCE SQ DUE

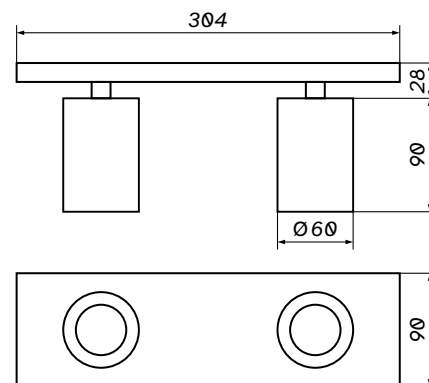

1:6

Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket GU10

Colour ○ ●

product code


○ 455378

● 455385

CROSTI LACCE SQ TRE

LOONARI | 49

surface mounted – CROSTI LACCE SQ TRE

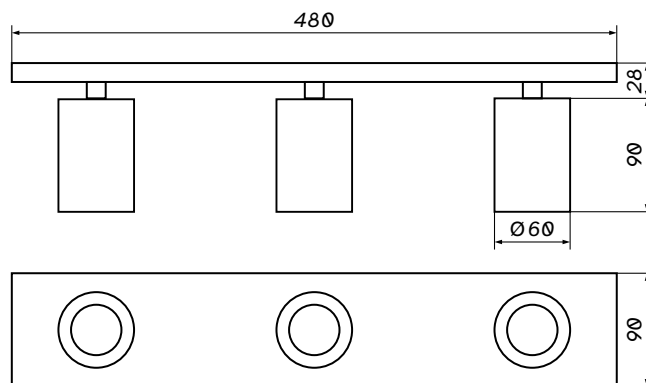

1:6

Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)

⚡ Voltage
220-240 V

🛡️ Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ○ ●

product code



○ 455392

● 455408

CROSTI LACCE RO TRE

LOONARI | 50

surface mounted – CROSTI LACCE RO TRE

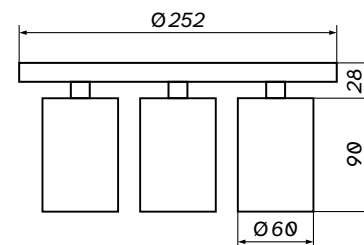

1:6

Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)

⚡ Voltage
220-240 V

🛡️ Protection class
IP20

Maximum wattage 50 W

Light socket GU10

Colour ○ ●

product code

○ 894767

● 894774

CROSTI LACCE SQ QUATRO

LOONARI | 51

surface mounted – CROSTI LACCE SQ QUATRO





Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)



1:6

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ○ ●


product code

○ 455415

● 455422

CROSTI LACCE RO SLIM

LOONARI | 52
surface mounted – CROSTI LACCE RO SLIM

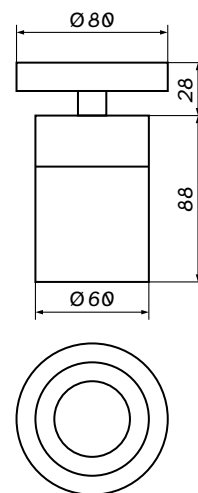

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W

Light socket GU10

Colour 


product code

 894781

CROSTI LACCE SQ SLIM

LOONARI | 53

surface mounted – CROSTI LACCE SQ SLIM

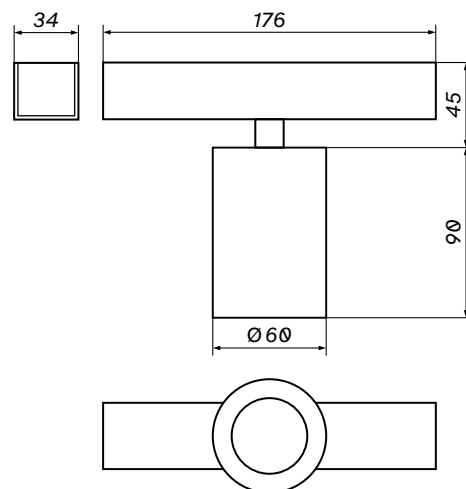

1:4

Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories

(honeycomb lens / linear lens / softening lens)

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ☐ ☒

product code

☐ 894705

☒ 894712

CROSTI LACCE SQ DUE SLIM

LOONARI | 54

surface mounted – CROSTI LACCE SQ DUE SLIM




Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)

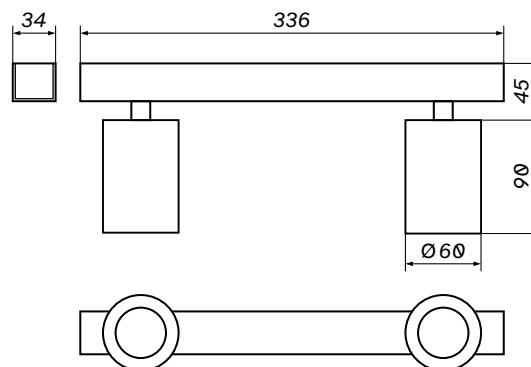

1:6

⚡ Voltage
220-240 V

🛡️ Protection class
IP20

Maximum wattage 50 W

Light socket GU10

Colour ○ ●


product code

○ 894729

● 894736

CROSTI LACCE SQ TRE SLIM

LOONARI | 55
surface mounted – CROSTI LACCE SQ TRE SLIM

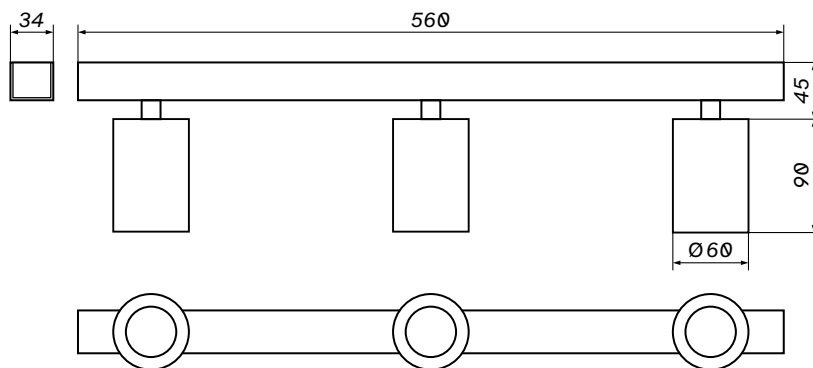

Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories

(honeycomb lens / linear lens / softening lens)

1:6

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**

Light socket **GU10**

Colour ☐ ☒

product code

☐ 894743

☒ 894750

