




Track Lights

HOME & DECOR
by LOONARI



LOONARI



TRACK LIGHTS



← JOIN US ON INSTAGRAM

Catalog current status: **October, 2024**

All measurements and technical data given in the catalogue are informational only. Due to the production process actual parameters of the products may slightly differ from information provided in the catalogue.

The most up-to-date data and actual technical information can be found on product cards, manuals or our website: **loonari.eu**

LOONARI sp. z o.o. reserves the right to amend presented materials and technical parameters without prior notice.

LOONARI sp. z o.o. is not liable for any printing mistake. All images in the catalogue are protected with authors' rights. Products and colours presented in the pictures are illustrative and may visually differ from actual products.

LOONARI mark has been registered at the EUIPO.

GET IN CONTACT

We're more than just a lamp provider – we're your partner in creating the perfect lighting. Starting with lighting design and continuing through the selection of the right products and control system, we will support you throughout the system set up and commissioning process.

If needed, you can count on our post-warranty service too. Tell us about your project: **hello@loonari.eu**

DISTRIBUTION



LOONARI sp. z o.o.
Podmiejska 7
Piekary Śląskie
PL41940, Poland
+48 539 982 819

CONTENTS PAGE

TRACK LIGHTS

Alamo	14	Crosti Minto	34
S40 TR	16	Crosti Rieti	35
S60 TR	18		
S75 TR	20		
Balago	22		
Ferte TR	23		
Lucena TR	24		
Lucena Slim TR	25		
Lugo TR	26		
Patto	28		
Crosti Alamo	30		
Crosti Aritzo	31		
Crosti Lacce TR	32		
Crosti Lacce Slim TR	33		



project - Katarzyna Cichońska KAA Studio














project - Borys Moryl BORI STUDIO



ALAMO

LOONARI | 14

track lights – ALAMO

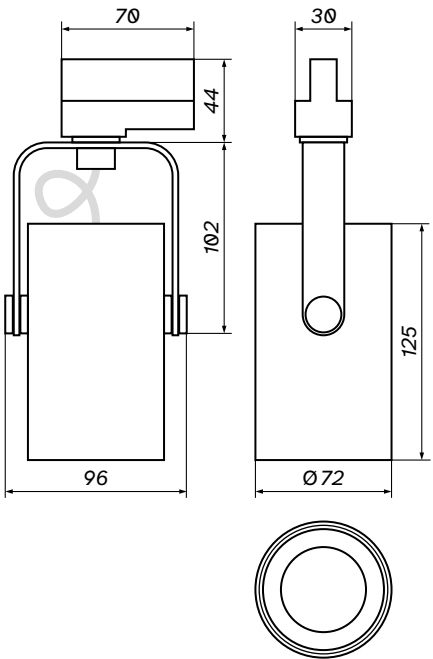

1:4

 Lifetime
30 000 h

 Beam angle
45°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 10 W
Colour temperature 3000 K / 4000 K
Luminous flux 750 lm
Dimming functionality none
Track 3 circuit
Colour ☐ ☒

product code


3000 K	☐	891704	☒	891698
4000 K	☐	891728	☒	891711



S40 TR

S / M / L / XL

LOONARI | 16
track lights – S40 TR

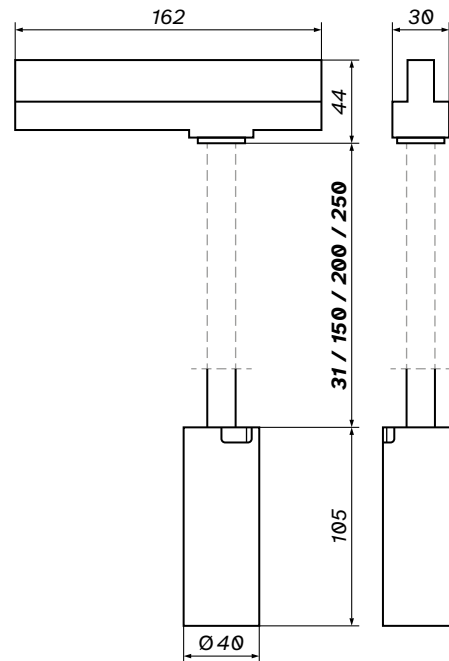

1:4

Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories

(honeycomb lens / linear lens / softening lens)

 Lifetime
35 000 h

 Beam angle
23° / 34° / **50°**

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 9,2 W

Colour temperature 3000 K / 4000 K

Luminous flux 739 lm

Dimming functionality none

Track 3 circuit

Colour ☐ ☒



product code


S	3000 K	○	50°	891155	34°	891155-896464	23°	891155-896457
		●	50°	891148	34°	891148-896464	23°	891148-896457
	4000 K	○	50°	891216	34°	891216-896464	23°	891216-896457
		●	50°	891209	34°	891209-896464	23°	891209-896457
M	3000 K	○	50°	891193	34°	891193-896464	23°	891193-896457
		●	50°	891186	34°	891186-896464	23°	891186-896457
	4000 K	○	50°	891254	34°	891254-896464	23°	891254-896457
		●	50°	891247	34°	891247-896464	23°	891247-896457
L	3000 K	○	50°	891179	34°	891179-896464	23°	891179-896457
		●	50°	891162	34°	891162-896464	23°	891162-896457
	4000 K	○	50°	891230	34°	891230-896464	23°	891230-896457
		●	50°	891223	34°	891223-896464	23°	891223-896457
XL	3000 K	○	50°	893050	34°	893050-896464	23°	893050-896457
		●	50°	893043	34°	893043-896464	23°	893043-896457
	4000 K	○	50°	893074	34°	893074-896464	23°	893074-896457
		●	50°	893067	34°	893067-896464	23°	893067-896457

S60 TR

S / M / L / XL

LOONARI | 18

track lights - S60 TR

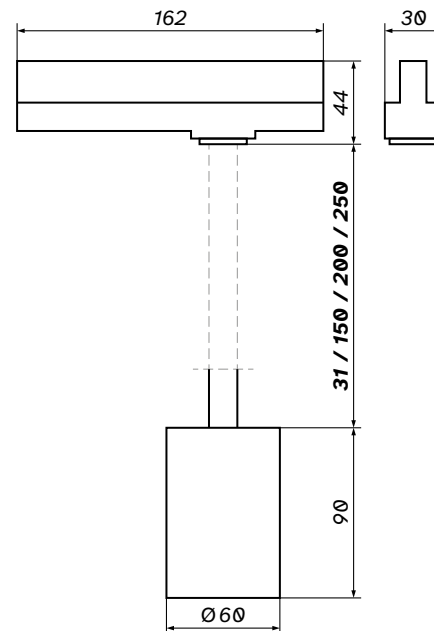

1:4

Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories

(honeycomb lens / linear lens / softening lens)

 Lifetime
35 000 h

 Beam angle
15° / 35° / **46°**

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 9,2 W
Colour temperature 3000 K
Luminous flux 739 lm
Dimming functionality none
Track 3 circuit
Colour ☐ ☒



product code

S	○	46°	891278	35°	891278-897331	15°	891278-897324
	●	46°	891261	35°	891261-897331	15°	891261-897324
M	○	46°	891315	35°	891315-897331	15°	891315-897324
	●	46°	891308	35°	891308-897331	15°	891308-897324
L	○	46°	891292	35°	891292-897331	15°	891292-897324
	●	46°	891285	35°	891285-897331	15°	891285-897324
XL	○	46°	893999	35°	893999-897331	15°	893999-897324
	●	46°	893982	35°	893982-897331	15°	893982-897324

S75 TR

S / M / L / XL

LOONARI | 20
track lights – S75 TR




Combine with:

Decorative ring ☐ ☒ ☐

Optical accessories

(honeycomb lens / linear lens / softening lens)

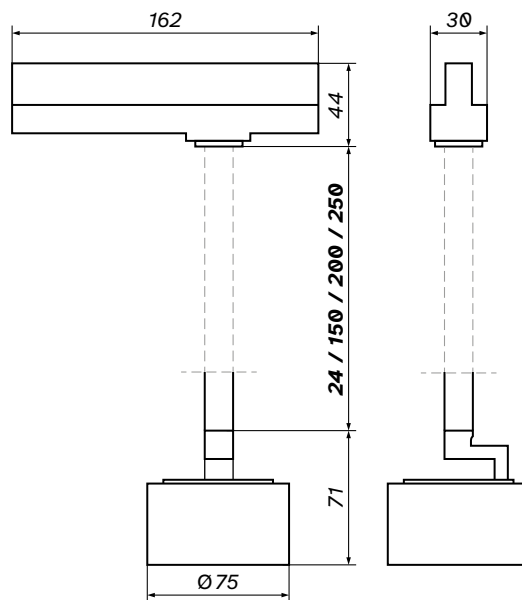

1:4

 Lifetime
35 000 h

 Beam angle
23° / 34° / **50°**

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage 9,2 W

Colour temperature 3000 K / 4000 K

Luminous flux 739 lm

Dimming functionality none

Track 3 circuit

Colour ☐ ☒




product code

S	3000 K	○	50°	901032	34°	901032-896464	23°	901032-896457
		●	50°	891025	34°	891025-896464	23°	891025-896457
	4000 K	○	50°	891094	34°	891094-896464	23°	891094-896457
		●	50°	891087	34°	891087-896464	23°	891087-896457
M	3000 K	○	50°	891070	34°	891070-896464	23°	891070-896457
		●	50°	891063	34°	891063-896464	23°	891063-896457
	4000 K	○	50°	891131	34°	891131-896464	23°	891131-896457
		●	50°	891124	34°	891124-896464	23°	891124-896457
L	3000 K	○	50°	891056	34°	891056-896464	23°	891056-896457
		●	50°	891049	34°	891049-896464	23°	891049-896457
	4000 K	○	50°	891117	34°	891117-896464	23°	891117-896457
		●	50°	891100	34°	891100-896464	23°	891100-896457
XL	3000 K	○	50°	893951	34°	893951-896464	23°	893951-896457
		●	50°	893944	34°	893944-896464	23°	893944-896457
	4000 K	○	50°	893975	34°	893975-896464	23°	893975-896457
		●	50°	893968	34°	893968-896464	23°	893968-896457

BALAGO

LOONARI | 22

track lights - BALAGO

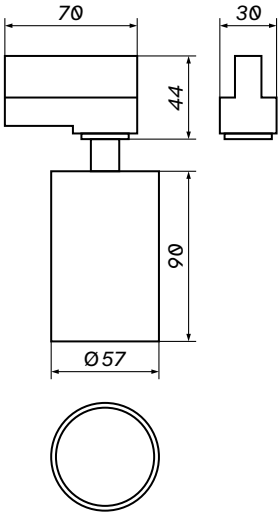

1:4

 Lifetime 30 000 h	 Beam angle 24°	 CRI 80	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---


Wattage	8 W
Colour temperature	3000 K / 4000 K
Luminous flux	600 lm
Dimming functionality	none
Track	3 circuit
Colour	☐ ☒

product code					
3000 K	☐	891964	☒	458966	
4000 K	☐	891957	☒	891940	

FERTE TR

LOONARI | 23

track lights - FERTE TR

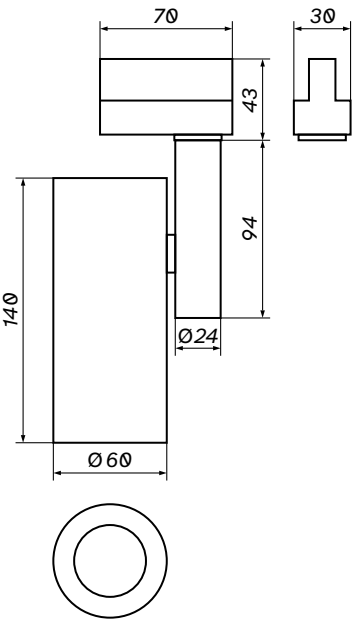

1:4


 Lifetime 30 000 h	 Beam angle 38°	 CRI 80	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	10 W
Colour temperature	3000 K / 4000 K
Luminous flux	750 lm
Dimming functionality	none
Track	3 circuit
Colour	☐ ☒

product code					
3000 K	☐	457174	☒	457167	
4000 K	☐	459574	☒	459550	

LUCENA TR

LOONARI | 24
track lights - LUCENA TR

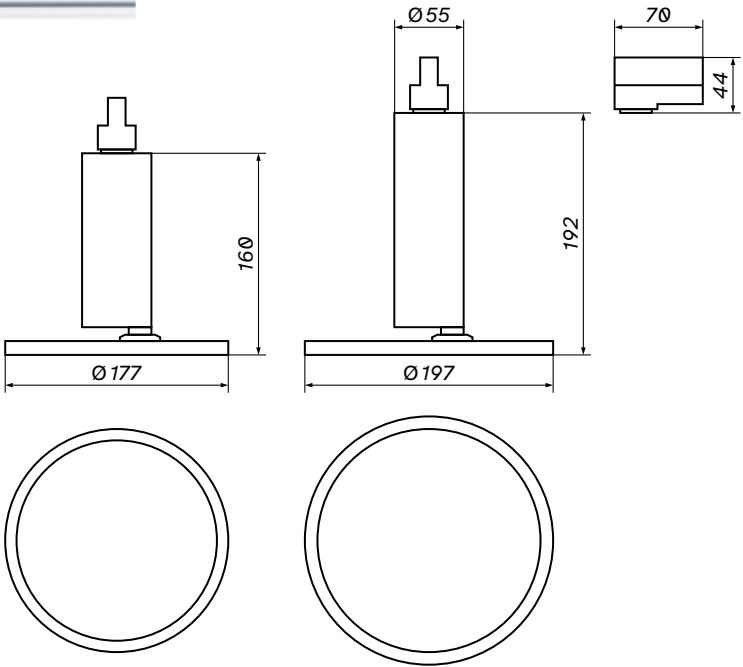

1:6

 Lifetime 30 000 h	 Beam angle 120°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	---	--	--	---


Wattage	12 W	18 W
Colour temperature	3000 K / 4000 K	4000 K
Luminous flux	866 lm	1570 lm
Dimming functionality	none	none
Track	3 circuit	3 circuit
Colour	○ ●	○ ●

product code					
12 W	3000 K	○	890752	●	890745
	4000 K	○	893081	●	893098
18 W	4000 K	○	893784	●	893791

LUCENA SLIM TR

LOONARI | 25

track lights - LUCENA SLIM TR

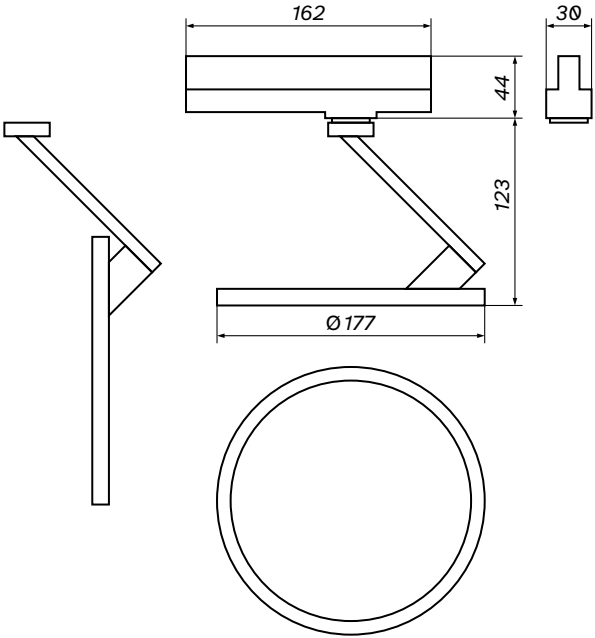

1:5

 Lifetime 30 000 h	 Beam angle 120°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	---	--	--	---

Wattage	12 W	18 W
Colour temperature	3000 K / 4000 K	4000 K
Luminous flux	866 lm	1570 lm
Dimming functionality	none	none
Track	3 circuit	3 circuit
Colour	○ ●	○ ●

product code					
12 W	3000 K	○	890776	●	890769
	4000 K	○	893104	●	893111
18 W	4000 K	○	893807	●	893814

LUGO TR

S / M / L / XL

LOONARI | 26

track lights - LUGO TR



 Lifetime
30 000 h


 Beam angle
24°

 CRI
90

 Voltage
220-240 V

 Protection class
IP20

Wattage	7 W	7 W
Colour temperature	3000 K	4000 K
Luminous flux	675 lm	675 lm
Dimming functionality	none	none
Track	3 circuit	3 circuit
Colour	☐ ☒	☒

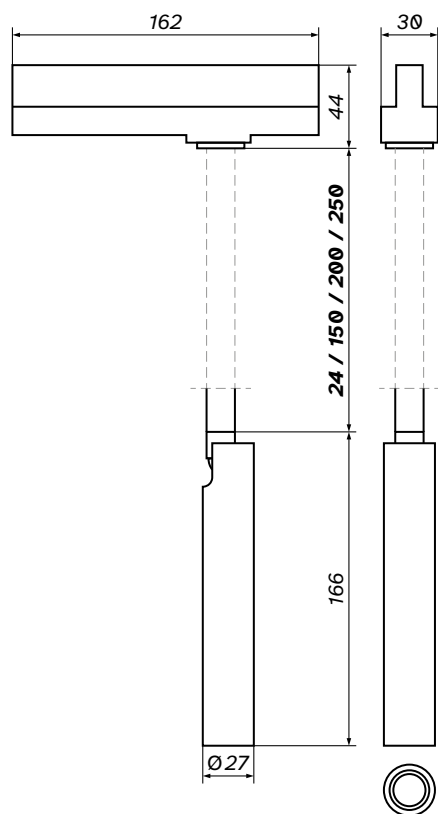

1:4

product code


S	3000 K	○	458720	●	459505
	4000 K			●	899816
M	3000 K	○	891018	●	891001
	4000 K			●	899823
L	3000 K	○	890998	●	890981
	4000 K			●	899830
XL	3000 K	○	890974	●	890967
	4000 K			●	899847



PATTO

LOONARI | 28

track lights - PATTO

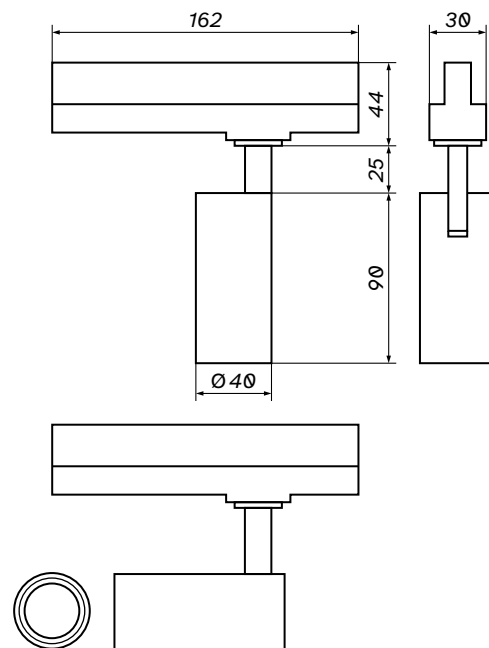

1:4

 Lifetime 30 000 h	 Beam angle 36°	 CRI 90	 Voltage 220-240 V	 Protection class IP20
---	--	--	--	---

Wattage	8 W
Colour temperature	3000 K / 4000 K
Luminous flux	600 lm
Dimming functionality	none
Track	3 circuit
Colour	☐ ☒

product code


3000 K	☐	891421	☒	891438
4000 K	☐	891445	☒	891452



CROSTI ALAMO

LOONARI | 30

track lights – CROSTI ALAMO

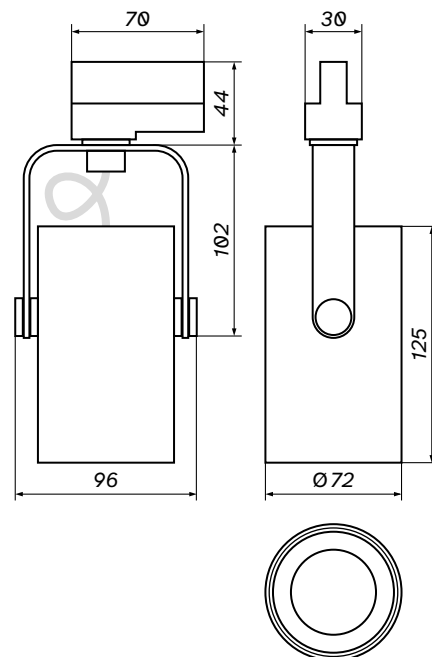

1:4

Voltage
220-240 V



Protection class
IP20

Maximum wattage 50 W
Light fixture GU10
Track 3 circuit
Colour ○ ●


product code

○ 891735
● 891742

CROSTI ARITZO

LOONARI | 31

track lights - CROSTI ARITZO

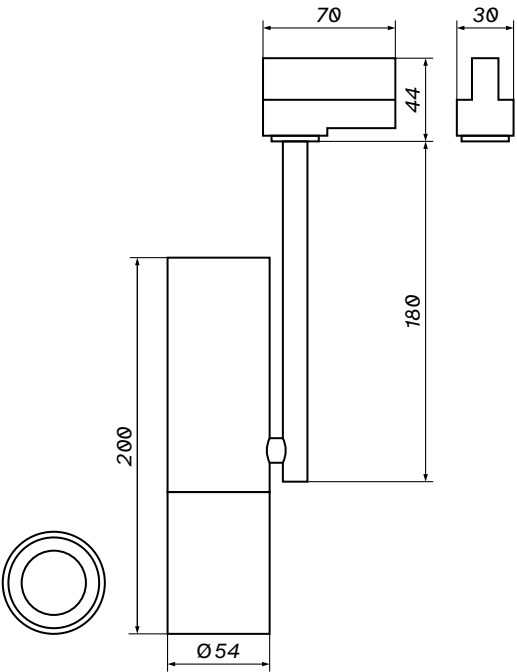

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage 50 W
Light fixture GU10
Track 3 circuit
Colour ○ ●

product code


○ 893821
● 893838

CROSTI LACCE TR

S / M / L / XL

LOONARI | 32

track lights - CROSTI LACCE TR

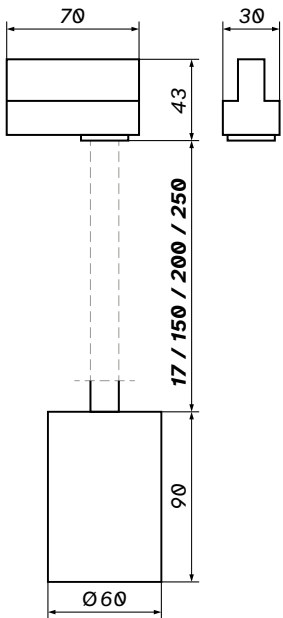

1:4

Combine with:

Decorative ring ○ ● ●

Optical accessories

(honeycomb lens / linear lens / softening lens)

Voltage
220-240 V



Protection class
IP20

Maximum wattage 50 W
Light fixture GU10
Track 3 circuit
Colour ○ ●


product code

S	○	890783	●	890790
M	○	891377	●	891360
L	○	891353	●	891346
XL	○	891339	●	891322

CROSTI LACCE SLIM TR

LOONARI | 33

track lights – CROSTI LACCE SLIM TR

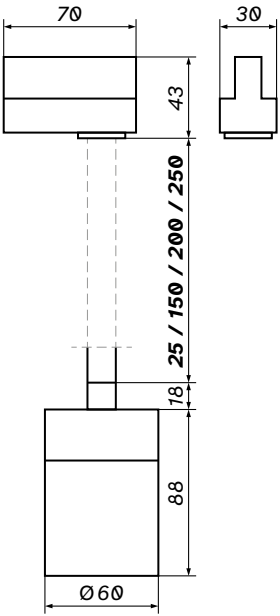

1:4

 Voltage
220-240 V

 Protection class
IP20

product code

S  899854

M  899861

L  899878

XL  899885

Maximum wattage 50 W

Light fixture GU10


Track 3 circuit

Colour 

CROSTI MINTO

LOONARI | 34

track lights - CROSTI MINTO

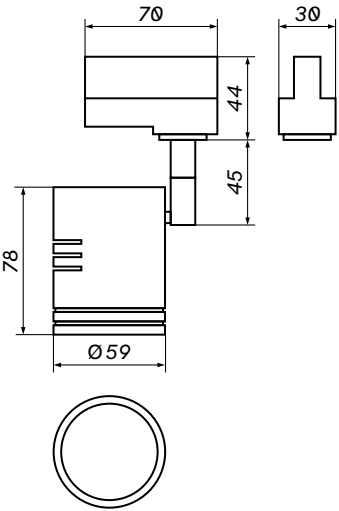

1:4

Voltage
220-240 V



Protection class
IP20

Maximum wattage 50 W
Light fixture GU10
Track 3 circuit
Colour ○ ●


product code

○ 457143
● 457150

CROSTI RIETI

LOONARI | 35

track lights – CROSTI RIETI

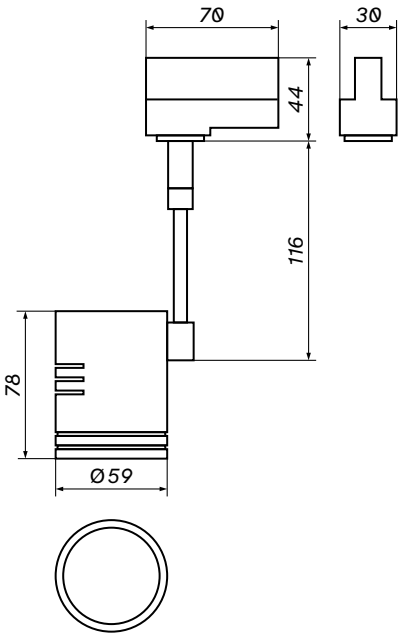

1:4

 Voltage
220-240 V

 Protection class
IP20

Maximum wattage **50 W**
Light fixture **GU10**
Track **3 circuit**
Colour ☐ ☒

product code

☐ 891384
☒ 891391

